

Luminaire

Code 5100-FE-S
 Name Dolt Pontual 3W 228LM 2700K 10°


Measurerm.

Code 414/2019
 Name Dolt Pontual 3W 228LM 2700K 10°

Luminaire Flux	228.03 lm	Luminaire Power	3.20 W	Efficacy	71.26 lm/W	Efficiency	100.00%
Sources Flux	228.03 lm	Maximum value	1407.74 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	114 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	114 mm	Height	0 mm	
Horizontal Luminous Area	0.004218 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001020 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	29-03-2019	Maximum Gamma Angle	90
Measurement Distance	0.00	Measurement Flux	228.03 lm	Operator		Rated Voltage	
Temperature	25.00 °C	Rated Current		Humidity	60.00 %	Photocell	
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5100-FE-S	LED 3W 228LM 2700K IRC>90 SDMC<3 NICH	228.03	3.20	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		

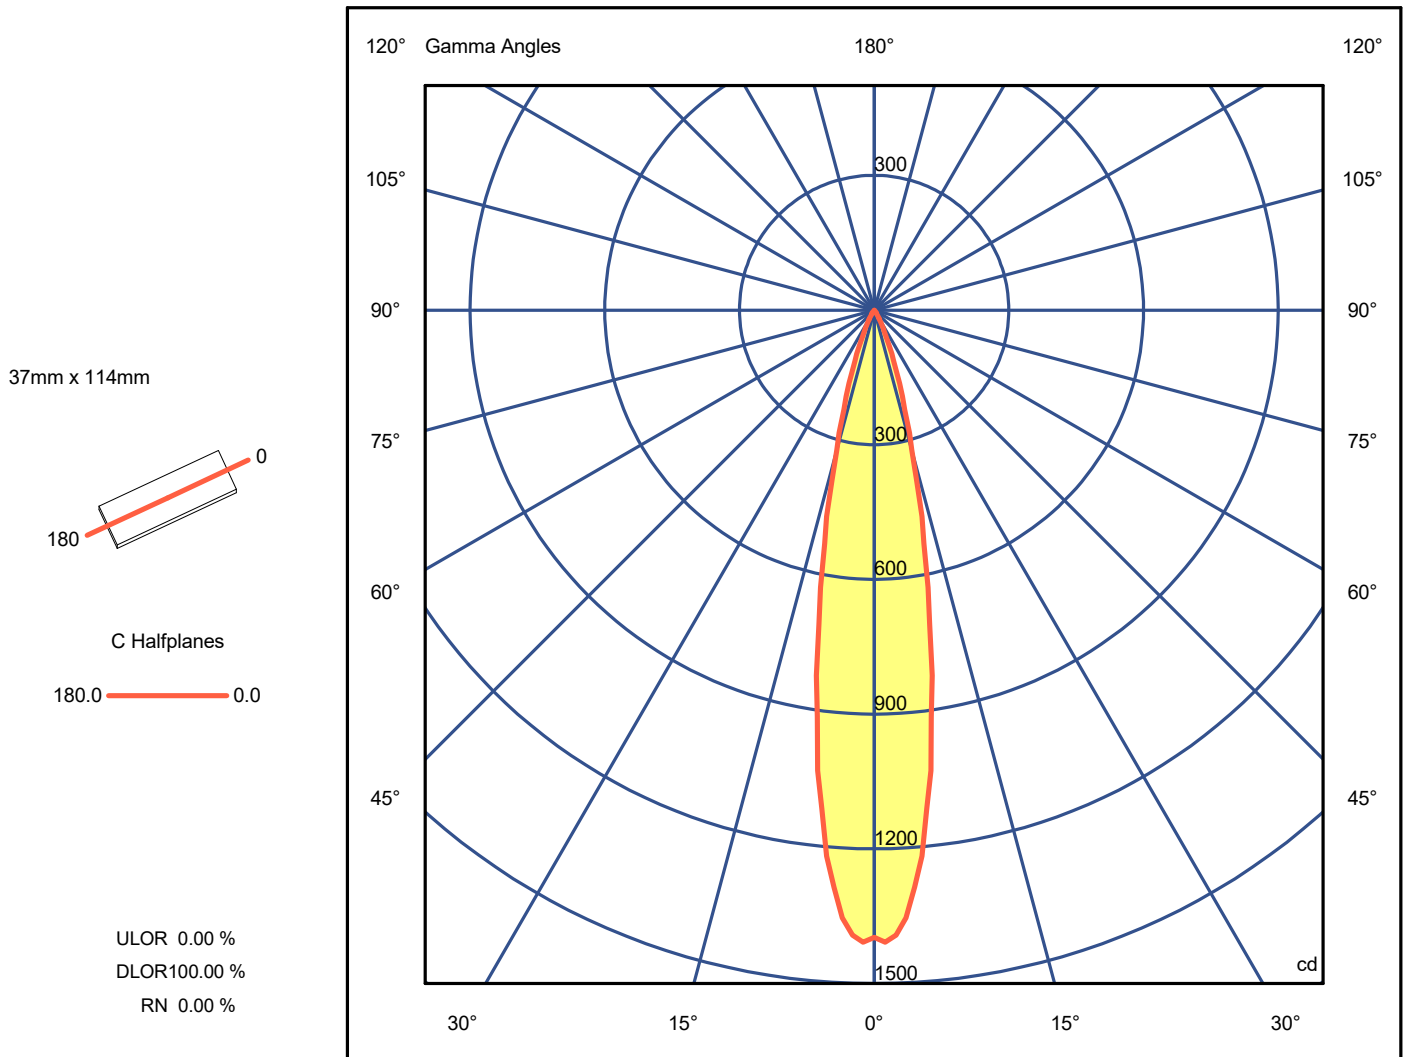

Luminaire

Code 5100-FE-S
 Name Dolt Pontual 3W 228LM 2700K 10°

Measurem.

Code 414/2019
 Name Dolt Pontual 3W 228LM 2700K 10°

Luminaire Flux	228.03 lm	Luminaire Power	3.20 W	Efficacy	71.26 lm/W	Efficiency	100.00%
Sources Flux	228.03 lm	Maximum value	1407.74 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C 0.00	C 0.00
G 0.0	1396.73	G 46.0 0.00
G 1.0	1407.74	G 47.0 0.00
G 2.0	1392.77	G 48.0 0.00
G 3.0	1355.33	G 49.0 0.00
G 4.0	1287.94	G 50.0 0.00
G 5.0	1220.54	G 51.0 0.00
G 6.0	1115.71	G 52.0 0.00
G 7.0	1033.34	G 53.0 0.00
G 8.0	913.54	G 54.0 0.00
G 9.0	823.68	G 55.0 0.00
G 10.0	711.36	G 56.0 0.00
G 11.0	628.99	G 57.0 0.00
G 12.0	531.65	G 58.0 0.00
G 13.0	471.74	G 59.0 0.00
G 14.0	389.38	G 60.0 0.00
G 15.0	321.98	G 61.0 0.00
G 16.0	284.54	G 62.0 0.00
G 17.0	232.13	G 63.0 0.00
G 18.0	202.18	G 64.0 0.00
G 19.0	172.22	G 65.0 0.00
G 20.0	142.27	G 66.0 0.00
G 21.0	119.81	G 67.0 0.00
G 22.0	104.83	G 68.0 0.00
G 23.0	82.37	G 69.0 0.00
G 24.0	67.39	G 70.0 0.00
G 25.0	52.42	G 71.0 0.00
G 26.0	44.93	G 72.0 0.00
G 27.0	37.44	G 73.0 0.00
G 28.0	29.95	G 74.0 0.00
G 29.0	22.46	G 75.0 0.00
G 30.0	22.46	G 76.0 0.00
G 31.0	14.98	G 77.0 0.00
G 32.0	14.98	G 78.0 0.00
G 33.0	7.49	G 79.0 0.00
G 34.0	7.49	G 80.0 0.00
G 35.0	7.49	G 81.0 0.00
G 36.0	7.49	G 82.0 0.00
G 37.0	7.49	G 83.0 0.00
G 38.0	7.49	G 84.0 0.00
G 39.0	7.49	G 85.0 0.00
G 40.0	0.00	G 86.0 0.00
G 41.0	0.00	G 87.0 0.00
G 42.0	0.00	G 88.0 0.00
G 43.0	0.00	G 89.0 0.00
G 44.0	0.00	G 90.0 0.00
G 45.0	0.00	