

**Luminaire**

Code 5101-AB-N  
 Name Dolt Pontual 7W 600LM 4000K 36°

**Measurement**


Code 429/2019  
 Name Dolt Pontual 7W 600LM 4000K 36°

Luminaire Flux	600.55 lm	Luminaire Power	7.20 W	Efficacy	83.41 lm/W	Efficiency	100.00%
Sources Flux	600.55 lm	Maximum value	1042.49 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	114 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	114 mm	Height	0 mm	
Horizontal Luminous Area	0.004218 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001020 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	29-03-2019	Maximum Gamma Angle	90
Measurement Distance	0.00	Measurement Flux	600.55 lm	Operator		Rated Voltage	
Temperature	25.00 °C	Rated Current		Humidity	60.00 %	Photocell	
Notes							

**Luminaire Sources**

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5101-AB-N	LED 7W 600LM 4000K IRC>90 SDMC<3 NICH	600.55	7.20	1
C.I.E.	97 100 100 100 100	D DIN 5040	A60		
F UTE	1.00 A	B NBN	BZ 1		


37mm x 114mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

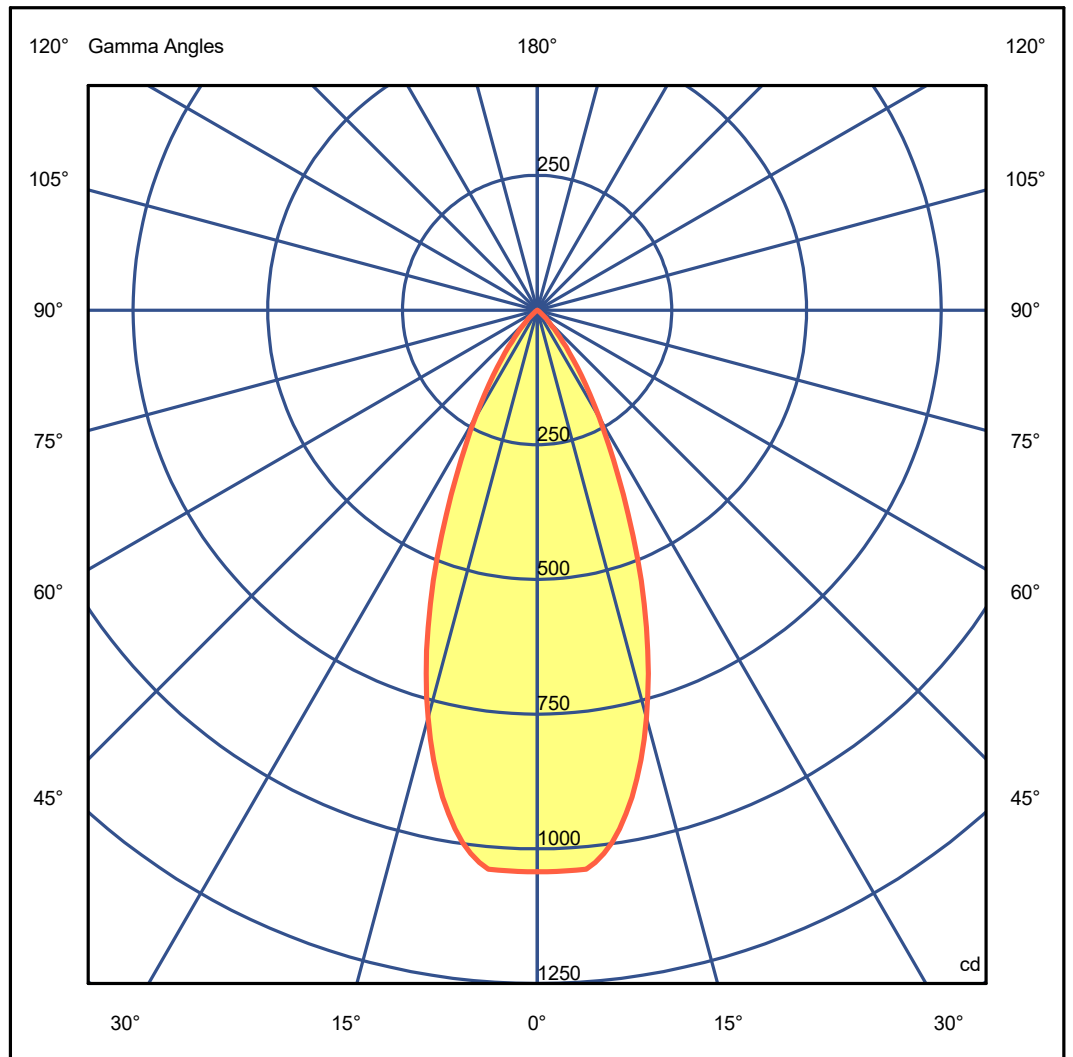

**Luminaire**

Code 5101-AB-N  
 Name Dolt Pontual 7W 600LM 4000K 36°

**Measurem.**

Code 429/2019  
 Name Dolt Pontual 7W 600LM 4000K 36°

Luminaire Flux	600.55 lm	Luminaire Power	7.20 W	Efficacy	83.41 lm/W	Efficiency	100.00%
Sources Flux	600.55 lm	Maximum value	1042.49 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

**Luminous Intensity Table cd Table 1/1**

C 0.00

G 0.0	1042.49
G 5.0	1041.41
G 10.0	949.25
G 15.0	783.36
G 20.0	580.61
G 25.0	377.86
G 30.0	230.40
G 35.0	129.02
G 40.0	64.51
G 45.0	27.65
G 50.0	9.22
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00