

**Luminaire**

Code 5101-AB-S  
 Name Dolt Pontual 7W 568LM 2700K 36°


**Measurment.**

Code 416/2019  
 Name Dolt Pontual 7W 568LM 2700K 36°

Luminaire Flux	568.41 lm	Luminaire Power	7.20 W	Efficacy	78.95 lm/W	Efficiency	100.00%
Sources Flux	568.41 lm	Maximum value	986.70 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	37 mm	Width	114 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	114 mm	Height	0 mm
Horizontal Luminous Area		0.004218 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001020 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-03-2019		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		568.41 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

**Luminaire Sources**

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5101-AB-S	LED 7W 568LM 2700K IRC>90 SDMC<3 NICH	568.41	7.20	1
C.I.E.	97 100 100 100 100	D DIN 5040	A60		
F UTE	1.00 A	B NBN	BZ 1		

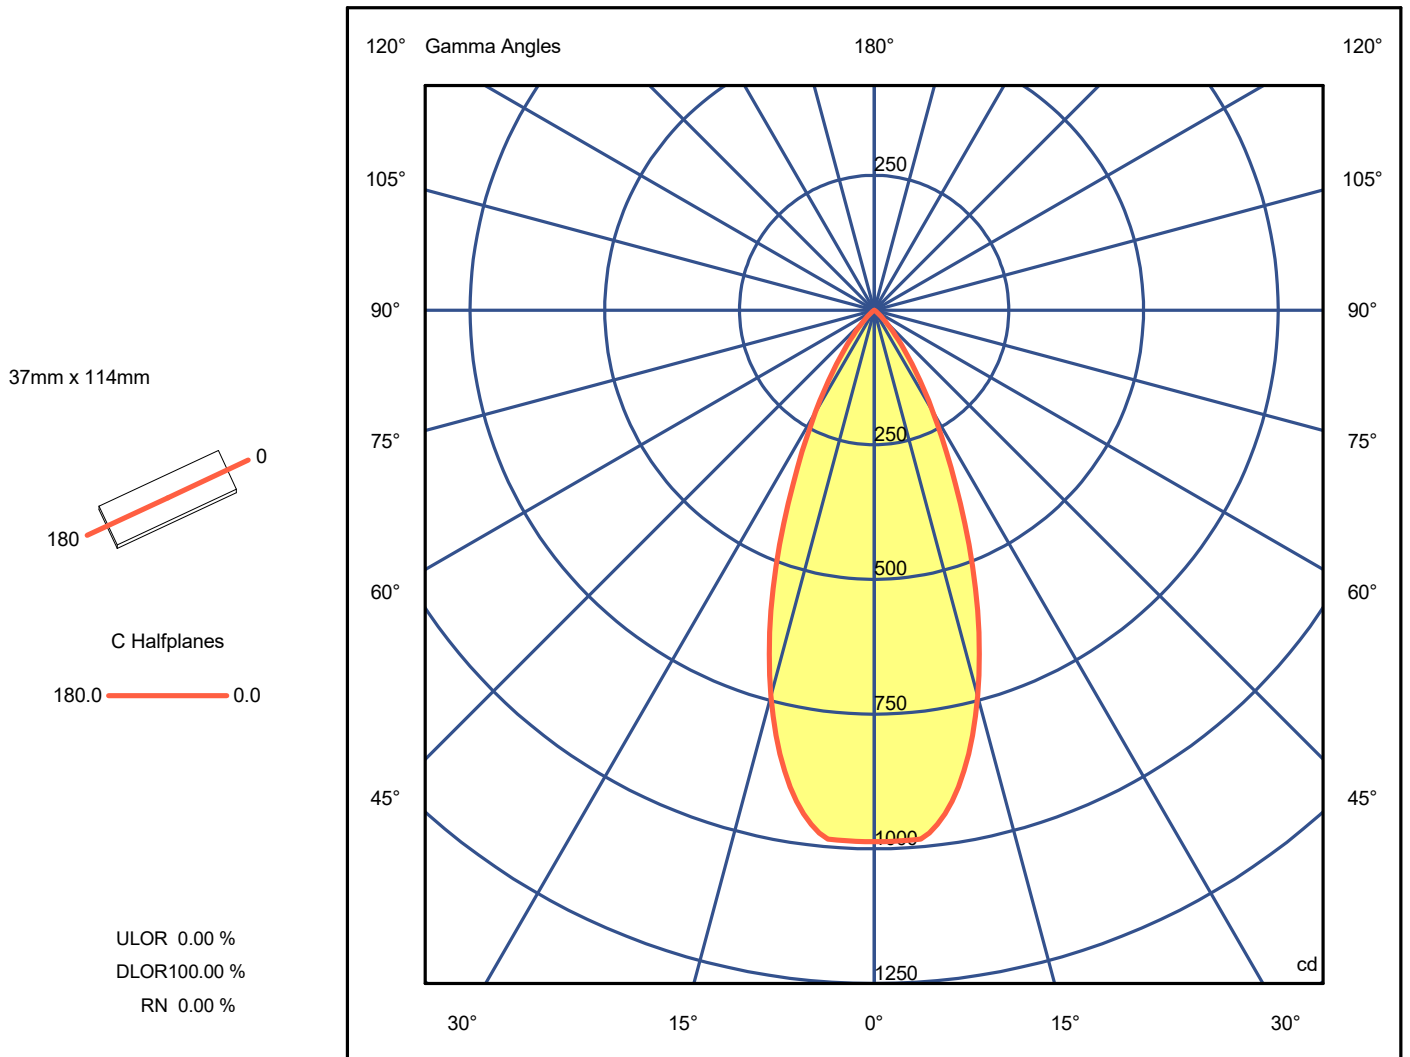

**Luminaire**

Code 5101-AB-S  
 Name Dolt Pontual 7W 568LM 2700K 36°

**Measurem.**

Code 416/2019  
 Name Dolt Pontual 7W 568LM 2700K 36°

Luminaire Flux	568.41 lm	Luminaire Power	7.20 W	Efficacy	78.95 lm/W	Efficiency	100.00%
Sources Flux	568.41 lm	Maximum value	986.70 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

**Luminous Intensity Table cd Table 1/1**

C 0.00

G 0.0	986.70
G 5.0	985.68
G 10.0	898.45
G 15.0	741.44
G 20.0	549.54
G 25.0	357.63
G 30.0	218.07
G 35.0	122.12
G 40.0	61.06
G 45.0	26.17
G 50.0	8.72
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00