

Luminaire

Code 5101-FE-N
 Name Dolt Pontual 7W 600LM 4000K 10°

Measurement


Code 430/2019
 Name Dolt Pontual 7W 600LM 4000K 10°

Luminaire Flux	600.77 lm	Luminaire Power	7.20 W	Efficacy	83.44 lm/W	Efficiency	100.00%
Sources Flux	600.77 lm	Maximum value	3708.86 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	114 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	114 mm	Height	0 mm	
Horizontal Luminous Area	0.004218 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001020 m2
Emitting area on Plane 0°	0.000000 m2	Glare area at 76°					
Emitting area on Plane 90°	0.000000 m2						
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	31-05-2019	Maximum Gamma Angle	90				
Measurement Distance	0.00	Measurement Flux	600.77 lm				
Operator		Rated Voltage					
Temperature	25.00 °C	Rated Current					
Humidity	60.00 %	Photocell					
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5101-FE-N	LED 7W 600LM 4000K IRC>90 SDMC<3 NICH	600.77	7.20	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		


37mm x 114mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

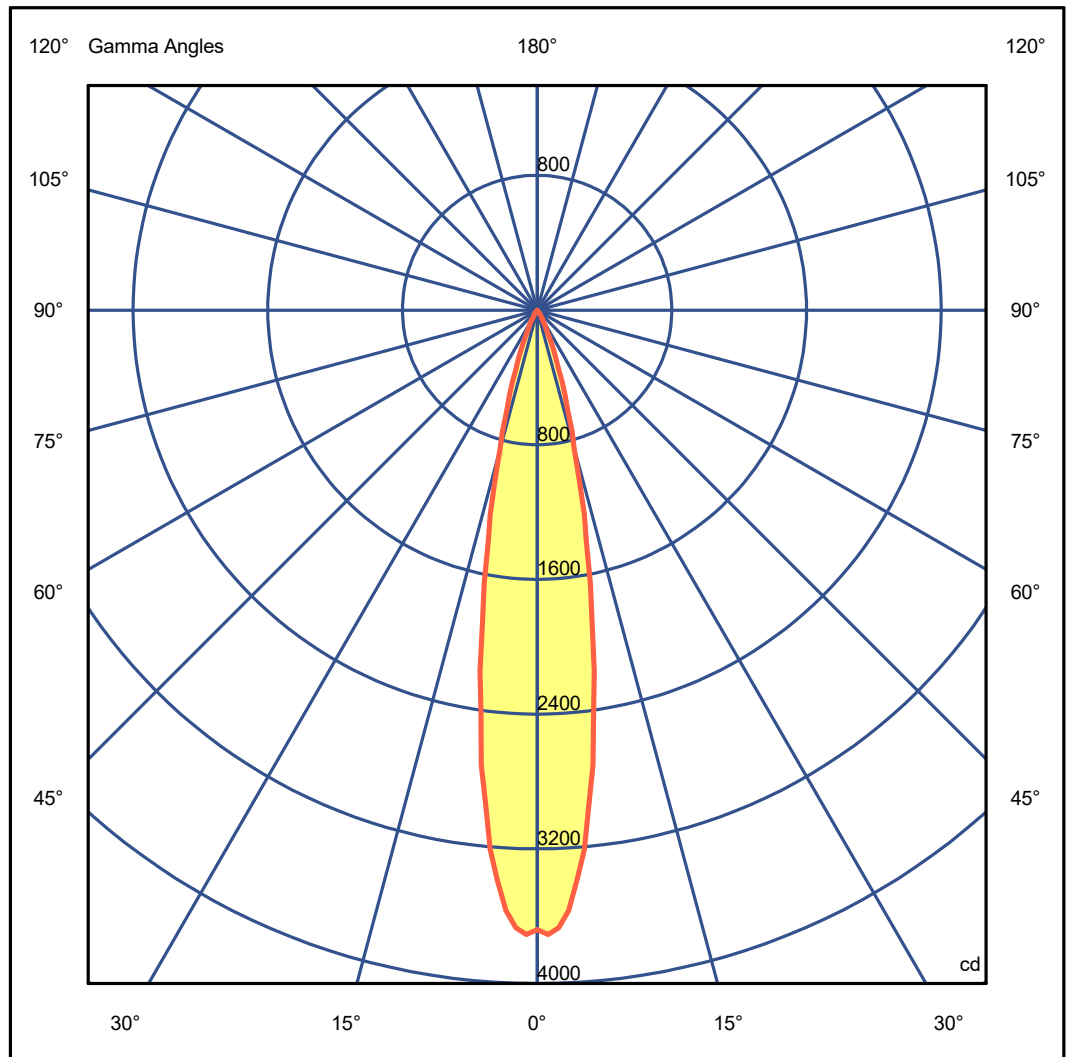

Luminaire

Code 5101-FE-N
 Name Dolt Pontual 7W 600LM 4000K 10°

Measurem.

Code 430/2019
 Name Dolt Pontual 7W 600LM 4000K 10°

Luminaire Flux	600.77 lm	Luminaire Power	7.20 W	Efficacy	83.44 lm/W	Efficiency	100.00%
Sources Flux	600.77 lm	Maximum value	3708.86 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C 0.00	C 0.00
G 0.0	3679.85	G 46.0 0.00
G 1.0	3708.86	G 47.0 0.00
G 2.0	3669.41	G 48.0 0.00
G 3.0	3570.77	G 49.0 0.00
G 4.0	3393.22	G 50.0 0.00
G 5.0	3215.66	G 51.0 0.00
G 6.0	2939.47	G 52.0 0.00
G 7.0	2722.46	G 53.0 0.00
G 8.0	2406.82	G 54.0 0.00
G 9.0	2170.08	G 55.0 0.00
G 10.0	1874.16	G 56.0 0.00
G 11.0	1657.15	G 57.0 0.00
G 12.0	1400.69	G 58.0 0.00
G 13.0	1242.86	G 59.0 0.00
G 14.0	1025.86	G 60.0 0.00
G 15.0	848.30	G 61.0 0.00
G 16.0	749.66	G 62.0 0.00
G 17.0	611.57	G 63.0 0.00
G 18.0	532.66	G 64.0 0.00
G 19.0	453.74	G 65.0 0.00
G 20.0	374.83	G 66.0 0.00
G 21.0	315.65	G 67.0 0.00
G 22.0	276.19	G 68.0 0.00
G 23.0	217.01	G 69.0 0.00
G 24.0	177.55	G 70.0 0.00
G 25.0	138.10	G 71.0 0.00
G 26.0	118.37	G 72.0 0.00
G 27.0	98.64	G 73.0 0.00
G 28.0	78.91	G 74.0 0.00
G 29.0	59.18	G 75.0 0.00
G 30.0	59.18	G 76.0 0.00
G 31.0	39.46	G 77.0 0.00
G 32.0	39.46	G 78.0 0.00
G 33.0	19.73	G 79.0 0.00
G 34.0	19.73	G 80.0 0.00
G 35.0	19.73	G 81.0 0.00
G 36.0	19.73	G 82.0 0.00
G 37.0	19.73	G 83.0 0.00
G 38.0	19.73	G 84.0 0.00
G 39.0	19.73	G 85.0 0.00
G 40.0	0.00	G 86.0 0.00
G 41.0	0.00	G 87.0 0.00
G 42.0	0.00	G 88.0 0.00
G 43.0	0.00	G 89.0 0.00
G 44.0	0.00	G 90.0 0.00
G 45.0	0.00	