

Luminaire

Code 5101-FE-S
Name Dolt Pontual 7W 568LM 2700K 10°

Measurement


Code 236/2019
Name Dolt Pontual 7W 568LM 2700K 10°

Luminaire Flux	568.10 lm	Luminaire Power	7.20 W	Efficacy	78.90 lm/W	Efficiency	100.00%
Sources Flux	568.10 lm	Maximum value	3507.18 cd	Position	C=0.00 G=1.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	37 mm	Width	114 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	114 mm	Height	0 mm
Horizontal Luminous Area		0.004218 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001020 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-03-2019		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		568.10 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5101-FE-S	LED 7W 568LM 2700K IRC>90 SDMC<3 NICH	568.10	7.20	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		

37mm x 114mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

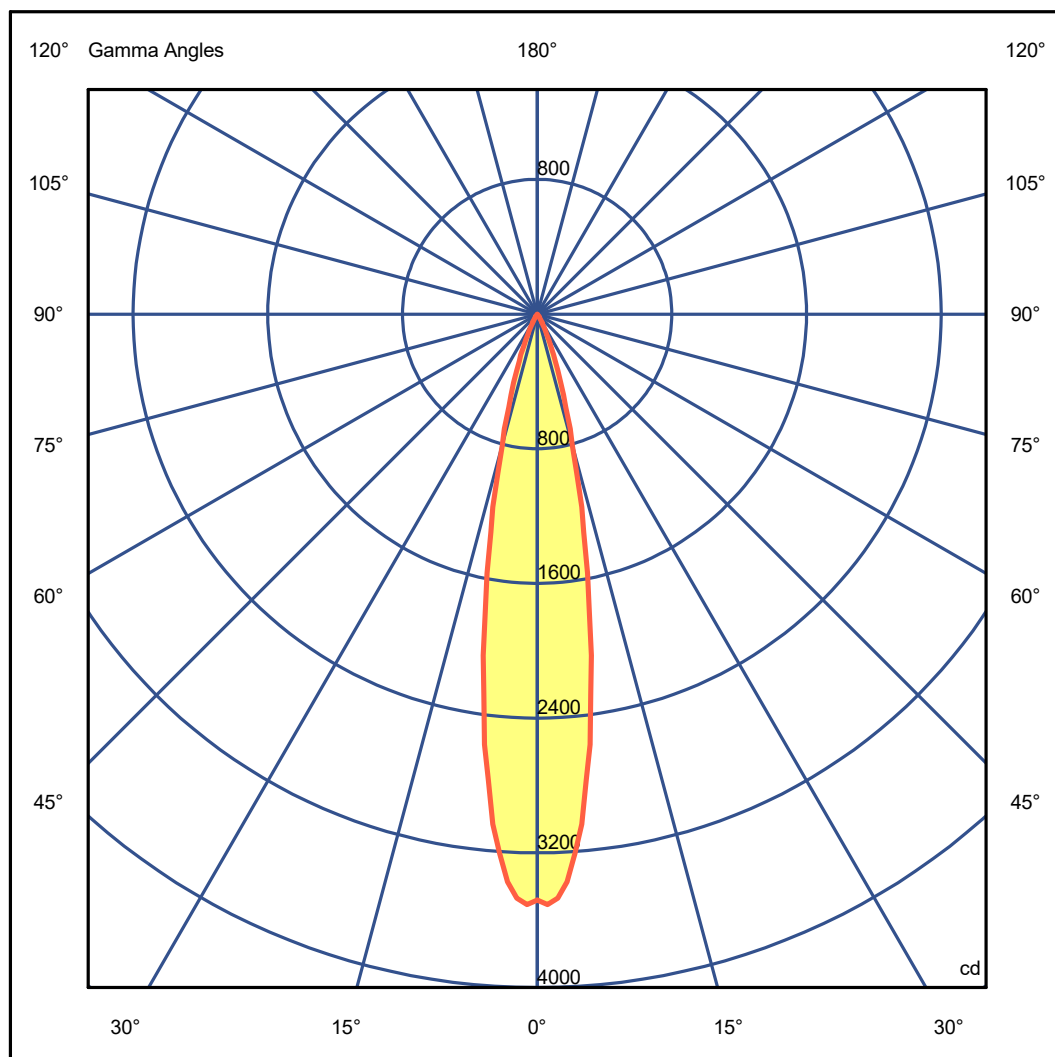

Luminaire

Code 5101-FE-S
Name Dolt Pontual 7W 568LM 2700K 10°

Measurem.

Code 236/2019
Name Dolt Pontual 7W 568LM 2700K 10°

Luminaire Flux	568.10 lm	Luminaire Power	7.20 W	Efficacy	78.90 lm/W	Efficiency	100.00%
Sources Flux	568.10 lm	Maximum value	3507.18 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C 0.00		C 0.00
G 0.0	3479.74	G 46.0	0.00
G 1.0	3507.18	G 47.0	0.00
G 2.0	3469.87	G 48.0	0.00
G 3.0	3376.59	G 49.0	0.00
G 4.0	3208.69	G 50.0	0.00
G 5.0	3040.80	G 51.0	0.00
G 6.0	2779.62	G 52.0	0.00
G 7.0	2574.42	G 53.0	0.00
G 8.0	2275.93	G 54.0	0.00
G 9.0	2052.07	G 55.0	0.00
G 10.0	1772.24	G 56.0	0.00
G 11.0	1567.04	G 57.0	0.00
G 12.0	1324.52	G 58.0	0.00
G 13.0	1175.28	G 59.0	0.00
G 14.0	970.07	G 60.0	0.00
G 15.0	802.17	G 61.0	0.00
G 16.0	708.90	G 62.0	0.00
G 17.0	578.31	G 63.0	0.00
G 18.0	503.69	G 64.0	0.00
G 19.0	429.07	G 65.0	0.00
G 20.0	354.45	G 66.0	0.00
G 21.0	298.48	G 67.0	0.00
G 22.0	261.17	G 68.0	0.00
G 23.0	205.21	G 69.0	0.00
G 24.0	167.90	G 70.0	0.00
G 25.0	130.59	G 71.0	0.00
G 26.0	111.93	G 72.0	0.00
G 27.0	93.28	G 73.0	0.00
G 28.0	74.62	G 74.0	0.00
G 29.0	55.97	G 75.0	0.00
G 30.0	55.97	G 76.0	0.00
G 31.0	37.31	G 77.0	0.00
G 32.0	37.31	G 78.0	0.00
G 33.0	18.66	G 79.0	0.00
G 34.0	18.66	G 80.0	0.00
G 35.0	18.66	G 81.0	0.00
G 36.0	18.66	G 82.0	0.00
G 37.0	18.66	G 83.0	0.00
G 38.0	18.66	G 84.0	0.00
G 39.0	18.66	G 85.0	0.00
G 40.0	0.00	G 86.0	0.00
G 41.0	0.00	G 87.0	0.00
G 42.0	0.00	G 88.0	0.00
G 43.0	0.00	G 89.0	0.00
G 44.0	0.00	G 90.0	0.00
G 45.0	0.00		