

Luminaire

Code 5102-FE-S
 Name Dolt Pontual 6W 456LM 2700K 24°


Measurement

Code 425/2019
 Name Dolt Pontual 6W 456LM 2700K 24°

Luminaire Flux	456.06 lm	Luminaire Power	6.10 W	Efficacy	74.76 lm/W	Efficiency	100.00%
Sources Flux	456.06 lm	Maximum value	2815.49 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	287 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	287 mm	Height	0 mm	
Horizontal Luminous Area	0.010705 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.002590 m2
Coordinate system	CG	Symmetry Type	90	Maximum Gamma Angle	90	Measurement Flux	456.06 lm
Date	31-05-2019	Measurement Distance	0.00	Operator		Temperature	25.00 °C
Humidity	60.00 %	Rated Voltage		Rated Current		Photocell	
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5102-FE-S	LED 6W 456LM 2700K IRC>90 SDMC<3 NICH	456.06	6.10	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		

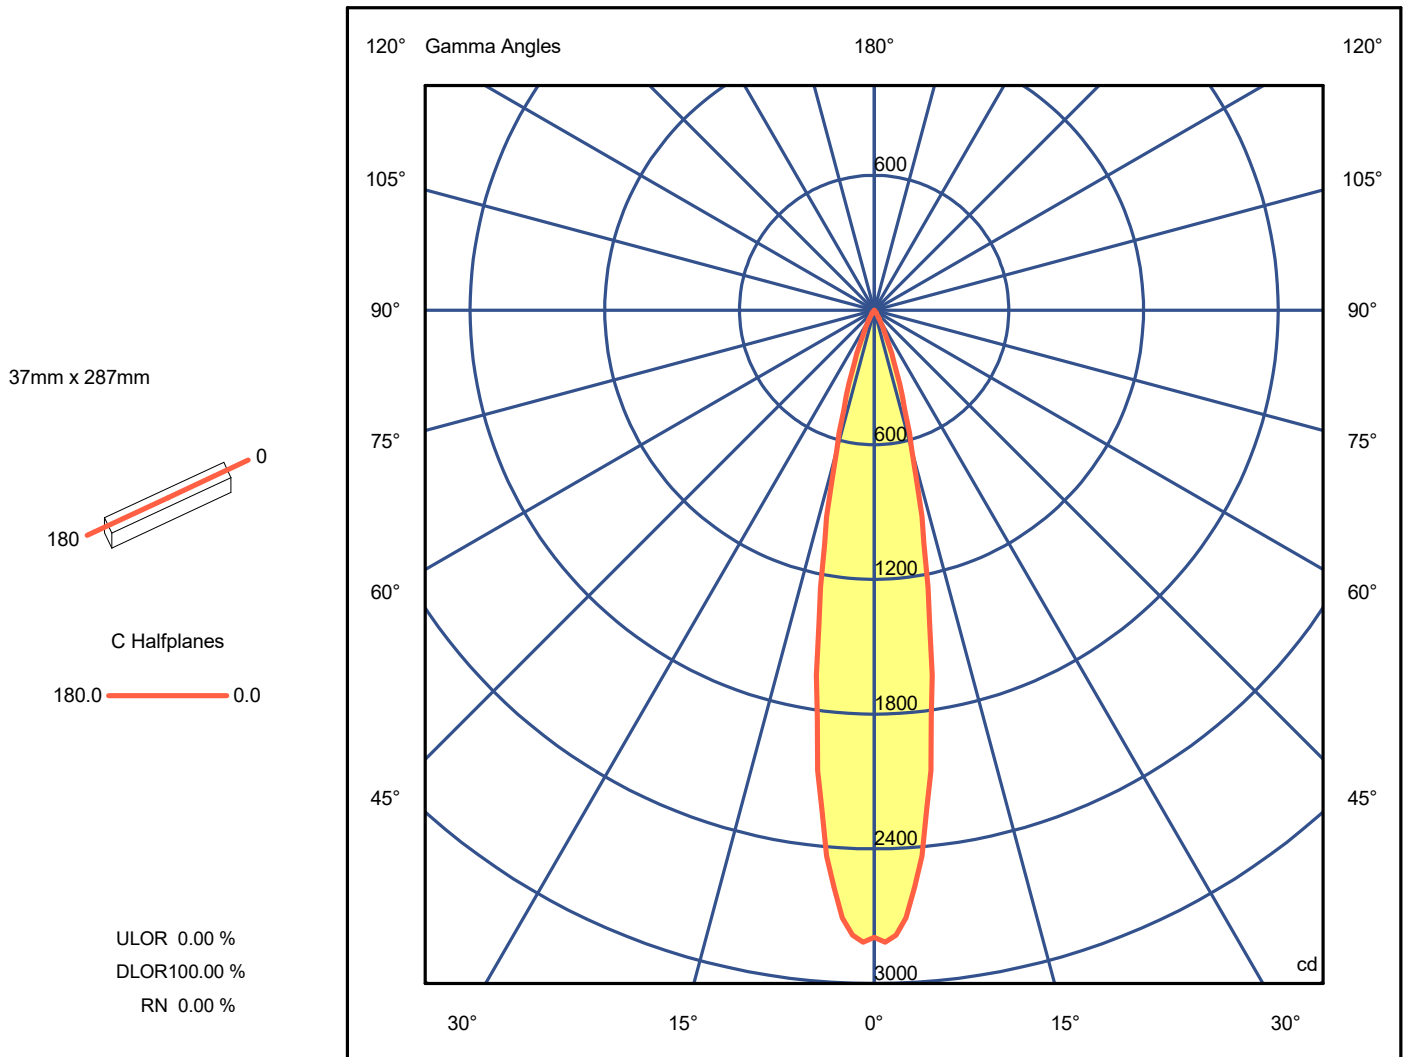

Luminaire

Code 5102-FE-S
 Name Dolt Pontual 6W 456LM 2700K 24°

Measurem.

Code 425/2019
 Name Dolt Pontual 6W 456LM 2700K 24°

Luminaire Flux	456.06 lm	Luminaire Power	6.10 W	Efficacy	74.76 lm/W	Efficiency	100.00%
Sources Flux	456.06 lm	Maximum value	2815.49 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C 0.00	C 0.00
G 0.0	2793.46	G 46.0 0.00
G 1.0	2815.49	G 47.0 0.00
G 2.0	2785.54	G 48.0 0.00
G 3.0	2710.66	G 49.0 0.00
G 4.0	2575.87	G 50.0 0.00
G 5.0	2441.09	G 51.0 0.00
G 6.0	2231.42	G 52.0 0.00
G 7.0	2066.69	G 53.0 0.00
G 8.0	1827.07	G 54.0 0.00
G 9.0	1647.36	G 55.0 0.00
G 10.0	1422.72	G 56.0 0.00
G 11.0	1257.98	G 57.0 0.00
G 12.0	1063.30	G 58.0 0.00
G 13.0	943.49	G 59.0 0.00
G 14.0	778.75	G 60.0 0.00
G 15.0	643.97	G 61.0 0.00
G 16.0	569.09	G 62.0 0.00
G 17.0	464.26	G 63.0 0.00
G 18.0	404.35	G 64.0 0.00
G 19.0	344.45	G 65.0 0.00
G 20.0	284.54	G 66.0 0.00
G 21.0	239.62	G 67.0 0.00
G 22.0	209.66	G 68.0 0.00
G 23.0	164.74	G 69.0 0.00
G 24.0	134.78	G 70.0 0.00
G 25.0	104.83	G 71.0 0.00
G 26.0	89.86	G 72.0 0.00
G 27.0	74.88	G 73.0 0.00
G 28.0	59.90	G 74.0 0.00
G 29.0	44.93	G 75.0 0.00
G 30.0	44.93	G 76.0 0.00
G 31.0	29.95	G 77.0 0.00
G 32.0	29.95	G 78.0 0.00
G 33.0	14.98	G 79.0 0.00
G 34.0	14.98	G 80.0 0.00
G 35.0	14.98	G 81.0 0.00
G 36.0	14.98	G 82.0 0.00
G 37.0	14.98	G 83.0 0.00
G 38.0	14.98	G 84.0 0.00
G 39.0	14.98	G 85.0 0.00
G 40.0	0.00	G 86.0 0.00
G 41.0	0.00	G 87.0 0.00
G 42.0	0.00	G 88.0 0.00
G 43.0	0.00	G 89.0 0.00
G 44.0	0.00	G 90.0 0.00
G 45.0	0.00	