

Luminaire

Code 5130-AS-S
 Name Dolt ASSIM 6W 460LM 2700K ASSIM


Measurement

Code 240/2019
 Name Dolt ASSIM 6W 460LM 2700K ASSIM

| | | | | | | | |
|---------------------------|-------------|-----------------------------|--------------|-----------------------------|-----------------|----------------------------|--------------|
| Luminaire Flux | 460.61 lm | Luminaire Power | 6.00 W | Efficacy | 76.77 lm/W | Efficiency | 100.00% |
| Sources Flux | 460.61 lm | Maximum value | 473.33 cd | Position | C=67.50 G=12.00 | CG | Asymmetrical |
| Rectangular Luminaire | Length | 37 mm | Width | 164 mm | Height | 1 mm | |
| Rectangular Luminous Area | Length | 37 mm | Width | 164 mm | Height | 0 mm | |
| Horizontal Luminous Area | 0.006068 m2 | Emitting area on Plane 180° | 0.000000 m2 | Emitting area on Plane 270° | 0.000000 m2 | Emitting area on Plane 90° | 0.001468 m2 |
| Coordinate system | CG | Symmetry Type | Asymmetrical | Date | 26-04-2019 | Maximum Gamma Angle | 90 |
| Measurement Distance | 0.00 | Measurement Flux | 460.61 lm | Operator | | Rated Voltage | |
| Temperature | 25.00 °C | Rated Current | | Humidity | 60.00 % | Photocell | |
| Notes | | | | | | | |

Luminaire Sources

| Line | Code | Name | Flux [lm] | Pow. [W] | Q.ty |
|--------|-------------------|---------------------------------------|-------------------|----------|------|
| | 5130-AS-S | LED 6W 460LM 2700K IRC>90 SDMC<3 NICH | 460.61 | 6.00 | 1 |
| C.I.E. | 76 98 100 100 100 | D DIN 5040 | A60 | | |
| F UTE | 1.00 B | B NBN | BZ 2 / 0.6 / BZ 1 | | |

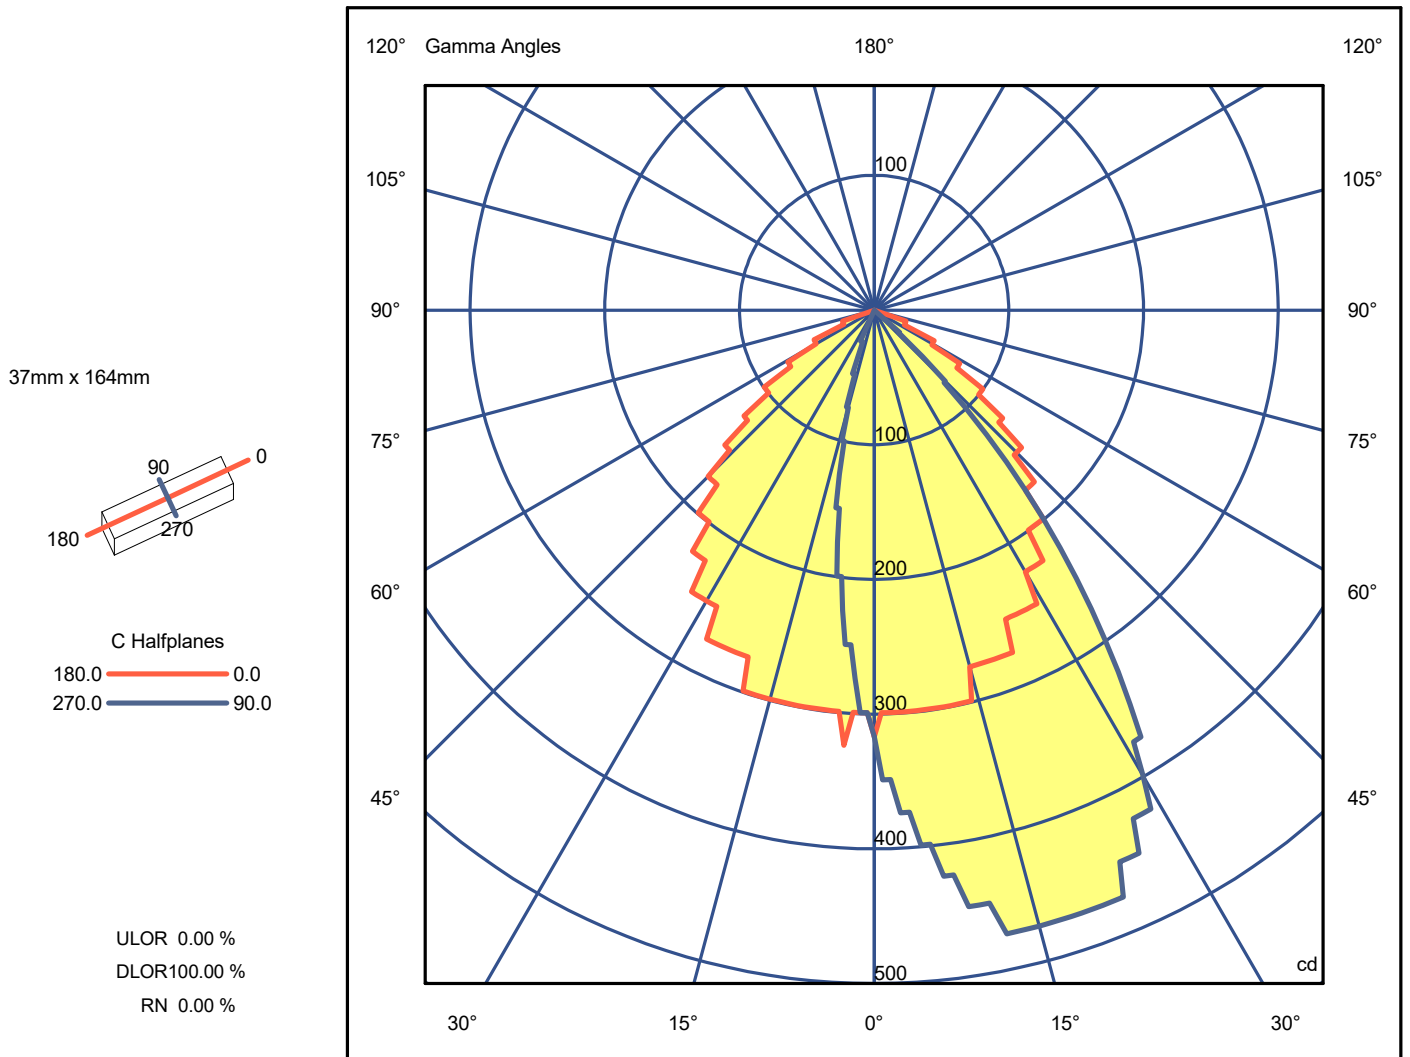

Luminaire

Code 5130-AS-S
 Name Dolt ASSIM 6W 460LM 2700K ASSIM
Measurement
 Code 240/2019
 Name Dolt ASSIM 6W 460LM 2700K ASSIM

| | | | | | | | |
|----------------|-----------|-----------------|-----------|----------|-----------------|------------|--------------|
| Luminaire Flux | 460.61 lm | Luminaire Power | 6.00 W | Efficacy | 76.77 lm/W | Efficiency | 100.00% |
| Sources Flux | 460.61 lm | Maximum value | 473.33 cd | Position | C=67.50 G=12.00 | CG | Asymmetrical |

Luminous Intensity Table cd Table 1/4

| | C 0.00 | C 22.50 | C 45.00 | C 67.50 | C 90.00 | C 112.50 | C 135.00 | C 157.50 | C 180.00 | C 202.50 | C 225.00 | C 247.50 | C 270.00 |
|--------|--------|---------|---------|---------|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| G 0.0 | 316.53 | 316.53 | 316.53 | 316.53 | 316.53 | 316.53 | 316.53 | 316.53 | 316.53 | 316.53 | 316.53 | 316.53 | 316.53 |
| G 1.0 | 298.94 | 323.86 | 323.86 | 348.77 | 348.77 | 323.86 | 323.86 | 298.94 | 298.94 | 323.86 | 323.86 | 298.94 | 298.94 |
| G 2.0 | 298.94 | 348.77 | 348.77 | 348.77 | 348.77 | 323.86 | 323.86 | 298.94 | 298.94 | 298.94 | 298.94 | 298.94 | 298.94 |
| G 3.0 | 298.94 | 348.77 | 348.77 | 373.68 | 373.68 | 348.77 | 348.77 | 298.94 | 298.94 | 298.94 | 298.94 | 274.03 | 274.03 |
| G 4.0 | 298.94 | 348.77 | 348.77 | 373.68 | 373.68 | 348.77 | 348.77 | 323.86 | 323.86 | 274.03 | 274.03 | 249.12 | 249.12 |
| G 5.0 | 298.94 | 373.68 | 373.68 | 398.59 | 398.59 | 373.68 | 373.68 | 298.94 | 298.94 | 274.03 | 274.03 | 249.12 | 249.12 |
| G 6.0 | 298.94 | 373.68 | 373.68 | 398.59 | 398.59 | 373.68 | 373.68 | 298.94 | 298.94 | 249.12 | 249.12 | 224.21 | 224.21 |
| G 7.0 | 298.94 | 373.68 | 373.68 | 423.50 | 423.50 | 373.68 | 373.68 | 298.94 | 298.94 | 249.12 | 249.12 | 199.30 | 199.30 |
| G 8.0 | 298.94 | 398.59 | 398.59 | 423.50 | 423.50 | 398.59 | 398.59 | 298.94 | 298.94 | 224.21 | 224.21 | 199.30 | 199.30 |
| G 9.0 | 298.94 | 398.59 | 398.59 | 448.42 | 448.42 | 398.59 | 398.59 | 298.94 | 298.94 | 224.21 | 224.21 | 174.38 | 174.38 |
| G 10.0 | 298.94 | 398.59 | 398.59 | 448.42 | 448.42 | 398.59 | 398.59 | 298.94 | 298.94 | 199.30 | 199.30 | 149.47 | 149.47 |
| G 11.0 | 298.94 | 398.59 | 398.59 | 448.42 | 448.42 | 423.50 | 423.50 | 298.94 | 298.94 | 199.30 | 199.30 | 149.47 | 149.47 |
| G 12.0 | 298.94 | 423.50 | 423.50 | 473.33 | 473.33 | 423.50 | 423.50 | 298.94 | 298.94 | 174.38 | 174.38 | 124.56 | 124.56 |
| G 13.0 | 298.94 | 423.50 | 423.50 | 473.33 | 473.33 | 423.50 | 423.50 | 298.94 | 298.94 | 174.38 | 174.38 | 99.65 | 99.65 |
| G 14.0 | 298.94 | 423.50 | 423.50 | 473.33 | 473.33 | 423.50 | 423.50 | 298.94 | 298.94 | 149.47 | 149.47 | 99.65 | 99.65 |
| G 15.0 | 274.03 | 423.50 | 423.50 | 473.33 | 473.33 | 448.42 | 448.42 | 298.94 | 298.94 | 149.47 | 149.47 | 74.74 | 74.74 |
| G 16.0 | 274.03 | 423.50 | 423.50 | 473.33 | 473.33 | 448.42 | 448.42 | 298.94 | 298.94 | 124.56 | 124.56 | 74.74 | 74.74 |
| G 17.0 | 274.03 | 423.50 | 423.50 | 473.33 | 473.33 | 448.42 | 448.42 | 298.94 | 298.94 | 124.56 | 124.56 | 49.82 | 49.82 |
| G 18.0 | 274.03 | 423.50 | 423.50 | 473.33 | 473.33 | 448.42 | 448.42 | 298.94 | 298.94 | 99.65 | 99.65 | 49.82 | 49.82 |
| G 19.0 | 274.03 | 423.50 | 423.50 | 473.33 | 473.33 | 448.42 | 448.42 | 298.94 | 298.94 | 99.65 | 99.65 | 49.82 | 49.82 |
| G 20.0 | 274.03 | 423.50 | 423.50 | 473.33 | 473.33 | 448.42 | 448.42 | 274.03 | 274.03 | 74.74 | 74.74 | 24.91 | 24.91 |
| G 21.0 | 274.03 | 423.50 | 423.50 | 473.33 | 473.33 | 448.42 | 448.42 | 274.03 | 274.03 | 74.74 | 74.74 | 24.91 | 24.91 |
| G 22.0 | 274.03 | 423.50 | 423.50 | 473.33 | 473.33 | 448.42 | 448.42 | 274.03 | 274.03 | 74.74 | 74.74 | 24.91 | 24.91 |
| G 23.0 | 249.12 | 423.50 | 423.50 | 473.33 | 473.33 | 448.42 | 448.42 | 274.03 | 274.03 | 49.82 | 49.82 | 24.91 | 24.91 |
| G 24.0 | 249.12 | 423.50 | 423.50 | 448.42 | 448.42 | 448.42 | 448.42 | 274.03 | 274.03 | 49.82 | 49.82 | 24.91 | 24.91 |
| G 25.0 | 249.12 | 423.50 | 423.50 | 448.42 | 448.42 | 448.42 | 448.42 | 274.03 | 274.03 | 49.82 | 49.82 | 0.00 | 0.00 |
| G 26.0 | 249.12 | 423.50 | 423.50 | 448.42 | 448.42 | 448.42 | 448.42 | 274.03 | 274.03 | 49.82 | 49.82 | 0.00 | 0.00 |
| G 27.0 | 249.12 | 423.50 | 423.50 | 423.50 | 423.50 | 448.42 | 448.42 | 274.03 | 274.03 | 24.91 | 24.91 | 0.00 | 0.00 |
| G 28.0 | 249.12 | 398.59 | 398.59 | 423.50 | 423.50 | 448.42 | 448.42 | 249.12 | 249.12 | 24.91 | 24.91 | 0.00 | 0.00 |
| G 29.0 | 249.12 | 398.59 | 398.59 | 423.50 | 423.50 | 423.50 | 423.50 | 249.12 | 249.12 | 24.91 | 24.91 | 0.00 | 0.00 |
| G 30.0 | 224.21 | 398.59 | 398.59 | 398.59 | 398.59 | 423.50 | 423.50 | 249.12 | 249.12 | 24.91 | 24.91 | 0.00 | 0.00 |
| G 31.0 | 224.21 | 398.59 | 398.59 | 373.68 | 373.68 | 423.50 | 423.50 | 249.12 | 249.12 | 24.91 | 24.91 | 0.00 | 0.00 |
| G 32.0 | 224.21 | 398.59 | 398.59 | 373.68 | 373.68 | 423.50 | 423.50 | 249.12 | 249.12 | 24.91 | 24.91 | 0.00 | 0.00 |
| G 33.0 | 224.21 | 373.68 | 373.68 | 348.77 | 348.77 | 398.59 | 398.59 | 249.12 | 249.12 | 24.91 | 24.91 | 0.00 | 0.00 |
| G 34.0 | 224.21 | 373.68 | 373.68 | 323.86 | 323.86 | 398.59 | 398.59 | 224.21 | 224.21 | 24.91 | 24.91 | 0.00 | 0.00 |
| G 35.0 | 199.30 | 373.68 | 373.68 | 298.94 | 298.94 | 398.59 | 398.59 | 224.21 | 224.21 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 36.0 | 199.30 | 348.77 | 348.77 | 274.03 | 274.03 | 398.59 | 398.59 | 224.21 | 224.21 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 37.0 | 199.30 | 348.77 | 348.77 | 249.12 | 249.12 | 373.68 | 373.68 | 224.21 | 224.21 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 38.0 | 199.30 | 323.86 | 323.86 | 224.21 | 224.21 | 373.68 | 373.68 | 199.30 | 199.30 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 39.0 | 199.30 | 323.86 | 323.86 | 199.30 | 199.30 | 348.77 | 348.77 | 199.30 | 199.30 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 40.0 | 174.38 | 298.94 | 298.94 | 174.38 | 174.38 | 348.77 | 348.77 | 199.30 | 199.30 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 41.0 | 174.38 | 298.94 | 298.94 | 149.47 | 149.47 | 323.86 | 323.86 | 199.30 | 199.30 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 42.0 | 174.38 | 274.03 | 274.03 | 124.56 | 124.56 | 298.94 | 298.94 | 174.38 | 174.38 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 43.0 | 174.38 | 249.12 | 249.12 | 99.65 | 99.65 | 298.94 | 298.94 | 174.38 | 174.38 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 44.0 | 149.47 | 249.12 | 249.12 | 74.74 | 74.74 | 274.03 | 274.03 | 174.38 | 174.38 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 45.0 | 149.47 | 224.21 | 224.21 | 74.74 | 74.74 | 249.12 | 249.12 | 174.38 | 174.38 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 46.0 | 149.47 | 199.30 | 199.30 | 49.82 | 49.82 | 224.21 | 224.21 | 149.47 | 149.47 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 47.0 | 149.47 | 174.38 | 174.38 | 24.91 | 24.91 | 199.30 | 199.30 | 149.47 | 149.47 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 48.0 | 124.56 | 149.47 | 149.47 | 24.91 | 24.91 | 174.38 | 174.38 | 149.47 | 149.47 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 49.0 | 124.56 | 149.47 | 149.47 | 24.91 | 24.91 | 149.47 | 149.47 | 124.56 | 124.56 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 50.0 | 124.56 | 124.56 | 124.56 | 0.00 | 0.00 | 149.47 | 149.47 | 124.56 | 124.56 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 51.0 | 99.65 | 99.65 | 99.65 | 0.00 | 0.00 | 124.56 | 124.56 | 124.56 | 124.56 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 52.0 | 99.65 | 74.74 | 74.74 | 0.00 | 0.00 | 99.65 | 99.65 | 99.65 | 99.65 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 53.0 | 99.65 | 74.74 | 74.74 | 0.00 | 0.00 | 74.74 | 74.74 | 99.65 | 99.65 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 54.0 | 99.65 | 49.82 | 49.82 | 0.00 | 0.00 | 74.74 | 74.74 | 99.65 | 99.65 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 55.0 | 74.74 | 49.82 | 49.82 | 0.00 | 0.00 | 49.82 | 49.82 | 99.65 | 99.65 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 56.0 | 74.74 | 24.91 | 24.91 | 0.00 | 0.00 | 49.82 | 49.82 | 74.74 | 74.74 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 57.0 | 74.74 | 24.91 | 24.91 | 0.00 | 0.00 | 24.91 | 24.91 | 74.74 | 74.74 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 58.0 | 74.74 | 24.91 | 24.91 | 0.00 | 0.00 | 24.91 | 24.91 | 74.74 | 74.74 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 59.0 | 49.82 | 24.91 | 24.91 | 0.00 | 0.00 | 24.91 | 24.91 | 74.74 | 74.74 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 60.0 | 49.82 | 0.00 | 0.00 | 0.00 | 0.00 | 24.91 | 24.91 | 49.82 | 49.82 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 61.0 | 49.82 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 49.82 | 49.82 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 62.0 | 49.82 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 49.82 | 49.82 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 63.0 | 49.82 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 49.82 | 49.82 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 64.0 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 49.82 | 49.82 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 65.0 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 24.91 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 66.0 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 24.91 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 67.0 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 24.91 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 68.0 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 24.91 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 69.0 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 24.91 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 70.0 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 24.91 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 71.0 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 24.91 | 24.91 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 72.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

Luminaire

Code 5130-AS-S
Name Dolt ASSIM 6W 460LM 2700K ASSIM

Measurement

Code 240/2019
Name Dolt ASSIM 6W 460LM 2700K ASSIM

| | | | | | | | |
|----------------|-----------|-----------------|-----------|----------|-----------------|------------|--------------|
| Luminaire Flux | 460.61 lm | Luminaire Power | 6.00 W | Efficacy | 76.77 lm/W | Efficiency | 100.00% |
| Sources Flux | 460.61 lm | Maximum value | 473.33 cd | Position | C=67.50 G=12.00 | CG | Asymmetrical |

Luminous Intensity Table cd Table 2/4

| | C 292.50 | C 315.00 | C 337.50 |
|--------|----------|----------|----------|
| G 0.0 | 316.53 | 316.53 | 316.53 |
| G 1.0 | 298.94 | 298.94 | 298.94 |
| G 2.0 | 298.94 | 298.94 | 298.94 |
| G 3.0 | 274.03 | 274.03 | 298.94 |
| G 4.0 | 274.03 | 274.03 | 298.94 |
| G 5.0 | 249.12 | 249.12 | 298.94 |
| G 6.0 | 249.12 | 249.12 | 298.94 |
| G 7.0 | 224.21 | 224.21 | 298.94 |
| G 8.0 | 224.21 | 224.21 | 298.94 |
| G 9.0 | 199.30 | 199.30 | 298.94 |
| G 10.0 | 199.30 | 199.30 | 298.94 |
| G 11.0 | 174.38 | 174.38 | 298.94 |
| G 12.0 | 174.38 | 174.38 | 298.94 |
| G 13.0 | 149.47 | 149.47 | 298.94 |
| G 14.0 | 149.47 | 149.47 | 298.94 |
| G 15.0 | 124.56 | 124.56 | 274.03 |
| G 16.0 | 124.56 | 124.56 | 274.03 |
| G 17.0 | 99.65 | 99.65 | 274.03 |
| G 18.0 | 99.65 | 99.65 | 274.03 |
| G 19.0 | 74.74 | 74.74 | 274.03 |
| G 20.0 | 74.74 | 74.74 | 274.03 |
| G 21.0 | 74.74 | 74.74 | 274.03 |
| G 22.0 | 49.82 | 49.82 | 274.03 |
| G 23.0 | 49.82 | 49.82 | 249.12 |
| G 24.0 | 49.82 | 49.82 | 249.12 |
| G 25.0 | 49.82 | 49.82 | 249.12 |
| G 26.0 | 24.91 | 24.91 | 249.12 |
| G 27.0 | 24.91 | 24.91 | 249.12 |
| G 28.0 | 24.91 | 24.91 | 249.12 |
| G 29.0 | 24.91 | 24.91 | 249.12 |
| G 30.0 | 24.91 | 24.91 | 224.21 |
| G 31.0 | 24.91 | 24.91 | 224.21 |
| G 32.0 | 24.91 | 24.91 | 224.21 |
| G 33.0 | 24.91 | 24.91 | 224.21 |
| G 34.0 | 0.00 | 0.00 | 224.21 |
| G 35.0 | 0.00 | 0.00 | 199.30 |
| G 36.0 | 0.00 | 0.00 | 199.30 |
| G 37.0 | 0.00 | 0.00 | 199.30 |
| G 38.0 | 0.00 | 0.00 | 199.30 |
| G 39.0 | 0.00 | 0.00 | 199.30 |
| G 40.0 | 0.00 | 0.00 | 174.38 |
| G 41.0 | 0.00 | 0.00 | 174.38 |
| G 42.0 | 0.00 | 0.00 | 174.38 |
| G 43.0 | 0.00 | 0.00 | 174.38 |
| G 44.0 | 0.00 | 0.00 | 149.47 |
| G 45.0 | 0.00 | 0.00 | 149.47 |
| G 46.0 | 0.00 | 0.00 | 149.47 |
| G 47.0 | 0.00 | 0.00 | 149.47 |
| G 48.0 | 0.00 | 0.00 | 124.56 |
| G 49.0 | 0.00 | 0.00 | 124.56 |
| G 50.0 | 0.00 | 0.00 | 124.56 |
| G 51.0 | 0.00 | 0.00 | 99.65 |
| G 52.0 | 0.00 | 0.00 | 99.65 |
| G 53.0 | 0.00 | 0.00 | 99.65 |
| G 54.0 | 0.00 | 0.00 | 99.65 |
| G 55.0 | 0.00 | 0.00 | 74.74 |
| G 56.0 | 0.00 | 0.00 | 74.74 |
| G 57.0 | 0.00 | 0.00 | 74.74 |
| G 58.0 | 0.00 | 0.00 | 74.74 |
| G 59.0 | 0.00 | 0.00 | 49.82 |
| G 60.0 | 0.00 | 0.00 | 49.82 |
| G 61.0 | 0.00 | 0.00 | 49.82 |
| G 62.0 | 0.00 | 0.00 | 49.82 |
| G 63.0 | 0.00 | 0.00 | 49.82 |
| G 64.0 | 0.00 | 0.00 | 24.91 |
| G 65.0 | 0.00 | 0.00 | 24.91 |
| G 66.0 | 0.00 | 0.00 | 24.91 |
| G 67.0 | 0.00 | 0.00 | 24.91 |
| G 68.0 | 0.00 | 0.00 | 24.91 |
| G 69.0 | 0.00 | 0.00 | 24.91 |
| G 70.0 | 0.00 | 0.00 | 24.91 |
| G 71.0 | 0.00 | 0.00 | 24.91 |
| G 72.0 | 0.00 | 0.00 | 0.00 |

Luminaire

Code 5130-AS-S
 Name Dolt ASSIM 6W 460LM 2700K ASSIM

Measurem.

Code 240/2019
 Name Dolt ASSIM 6W 460LM 2700K ASSIM

| | | | | | | | |
|----------------|-----------|-----------------|-----------|----------|-----------------|------------|--------------|
| Luminaire Flux | 460.61 lm | Luminaire Power | 6.00 W | Efficacy | 76.77 lm/W | Efficiency | 100.00% |
| Sources Flux | 460.61 lm | Maximum value | 473.33 cd | Position | C=67.50 G=12.00 | CG | Asymmetrical |

Luminous Intensity Table cd Table 3/4

| | C 0.00 | C 22.50 | C 45.00 | C 67.50 | C 90.00 | C 112.50 | C 135.00 | C 157.50 | C 180.00 | C 202.50 | C 225.00 | C 247.50 | C 270.00 |
|--------|--------|---------|---------|---------|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| G 73.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 74.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 75.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 76.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 77.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 78.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 79.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 80.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 81.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 82.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 83.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 84.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 85.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 86.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 87.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 88.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 89.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| G 90.0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

Luminaire

Code 5130-AS-S
 Name Dolt ASSIM 6W 460LM 2700K ASSIM

Measurem.

Code 240/2019
 Name Dolt ASSIM 6W 460LM 2700K ASSIM

| | | | | | | | |
|----------------|-----------|-----------------|-----------|----------|-----------------|------------|--------------|
| Luminaire Flux | 460.61 lm | Luminaire Power | 6.00 W | Efficacy | 76.77 lm/W | Efficiency | 100.00% |
| Sources Flux | 460.61 lm | Maximum value | 473.33 cd | Position | C=67.50 G=12.00 | CG | Asymmetrical |

Luminous Intensity Table cd Table 4/4

| | C 292.50 | C 315.00 | C 337.50 |
|--------|----------|----------|----------|
| G 73.0 | 0.00 | 0.00 | 0.00 |
| G 74.0 | 0.00 | 0.00 | 0.00 |
| G 75.0 | 0.00 | 0.00 | 0.00 |
| G 76.0 | 0.00 | 0.00 | 0.00 |
| G 77.0 | 0.00 | 0.00 | 0.00 |
| G 78.0 | 0.00 | 0.00 | 0.00 |
| G 79.0 | 0.00 | 0.00 | 0.00 |
| G 80.0 | 0.00 | 0.00 | 0.00 |
| G 81.0 | 0.00 | 0.00 | 0.00 |
| G 82.0 | 0.00 | 0.00 | 0.00 |
| G 83.0 | 0.00 | 0.00 | 0.00 |
| G 84.0 | 0.00 | 0.00 | 0.00 |
| G 85.0 | 0.00 | 0.00 | 0.00 |
| G 86.0 | 0.00 | 0.00 | 0.00 |
| G 87.0 | 0.00 | 0.00 | 0.00 |
| G 88.0 | 0.00 | 0.00 | 0.00 |
| G 89.0 | 0.00 | 0.00 | 0.00 |
| G 90.0 | 0.00 | 0.00 | 0.00 |