

Luminaire

Code 5172-MD-S
Name Dolt Spot 6W 380LM 2700K 30°

Measurem.


Code 424/2019
Name Dolt Spot 6W 380LM 2700K 30°

Luminaire Flux	380.76 lm	Luminaire Power	6.10 W	Efficacy	62.42 lm/W	Efficiency	100.00%
Sources Flux	380.76 lm	Maximum value	894.24 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	56 mm	Height	77 mm		
Round Luminous Area		Diam.	56 mm	Height	77 mm		
Horizontal Luminous Area		0.002463 m2		Emitting area on Plane 180°		0.004312 m2	
Emitting area on Plane 0°		0.004312 m2		Emitting area on Plane 270°		0.004312 m2	
Emitting area on Plane 90°		0.004312 m2		Glare area at 76°		0.004780 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		31-05-2019		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		380.76 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5172-MD-S	LED 6W 380LM 2700K IRC>90 SDMC<3 KANBON	380.76	6.10	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		


Diam=56mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

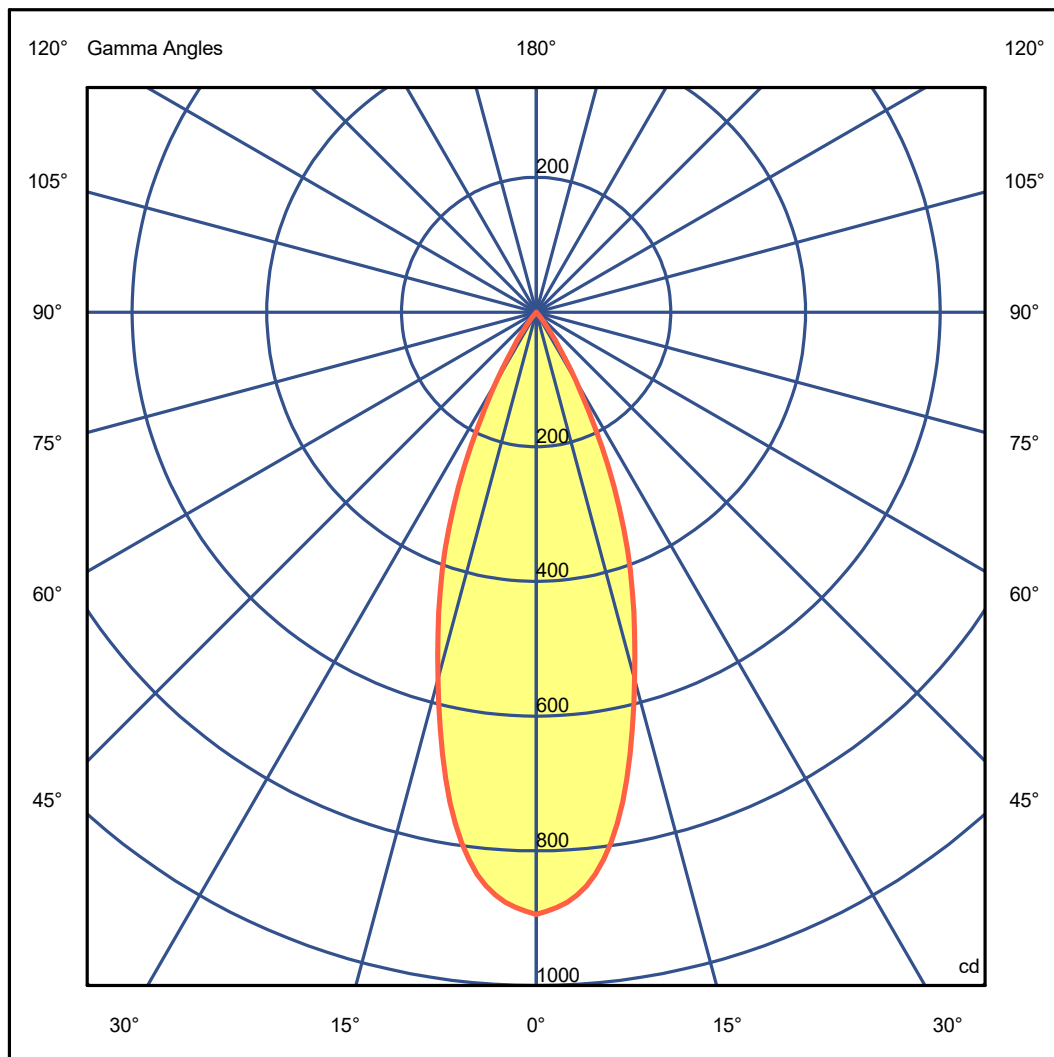

Luminaire

Code 5172-MD-S
Name Dolt Spot 6W 380LM 2700K 30°

Measurem.

Code 424/2019
Name Dolt Spot 6W 380LM 2700K 30°

Luminaire Flux	380.76 lm	Luminaire Power	6.10 W	Efficacy	62.42 lm/W	Efficiency	100.00%
Sources Flux	380.76 lm	Maximum value	894.24 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
G 0.0		894.24
G 5.0		855.36
G 10.0		738.72
G 15.0		563.76
G 20.0		408.24
G 25.0		252.72
G 30.0		116.64
G 35.0		38.88
G 40.0		0.00
G 45.0		0.00
G 50.0		0.00
G 55.0		0.00
G 60.0		0.00
G 65.0		0.00
G 70.0		0.00
G 75.0		0.00
G 80.0		0.00
G 85.0		0.00
G 90.0		0.00