

Luminaire

Code 5183-AB-S
Name Dolt Projetor 7W 568LM 2700K 36°

Measurement


Code 448/2019
Name Dolt Projetor 7W 568LM 2700K 36°

Luminaire Flux	568.17 lm	Luminaire Power	7.20 W	Efficacy	78.91 lm/W	Efficiency	100.00%
Sources Flux	568.17 lm	Maximum value	986.30 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	84 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	84 mm	Height	0 mm	
Horizontal Luminous Area	0.003108 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.000752 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	05-06-2019	Maximum Gamma Angle	90				
Measurement Distance	0.00	Measurement Flux	568.17 lm				
Operator		Rated Voltage					
Temperature	25.00 °C	Rated Current					
Humidity	60.00 %	Photocell					
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5183-AB-S	LED 7W 568LM 2700K IRC>90 SDMC<3 NICH	568.17	7.20	1
C.I.E.	97 100 100 100 100	D DIN 5040	A60		
F UTE	1.00 A	B NBN	BZ 1		

37mm x 84mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

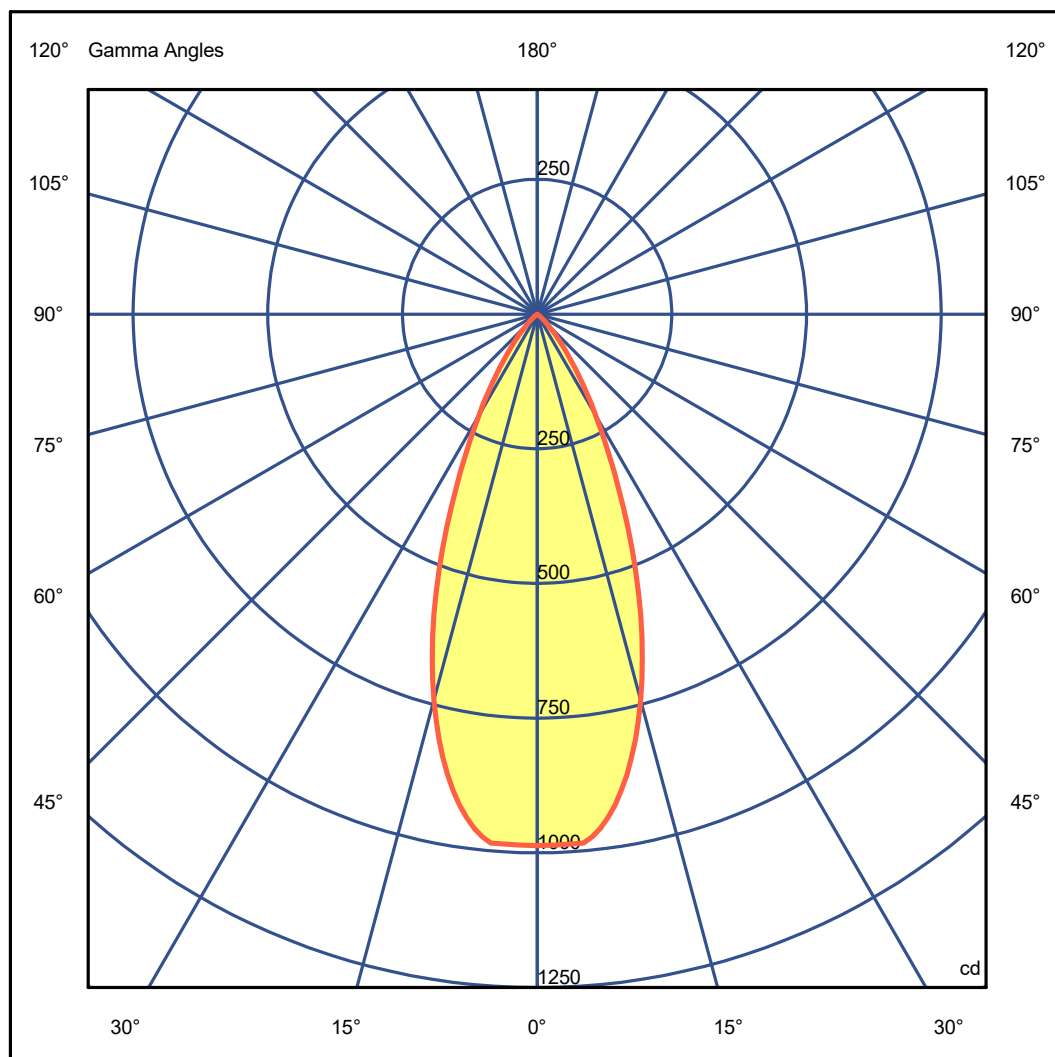

Luminaire

Code 5183-AB-S
Name Dolt Projetor 7W 568LM 2700K 36°

Measurem.

Code 448/2019
Name Dolt Projetor 7W 568LM 2700K 36°

Luminaire Flux	568.17 lm	Luminaire Power	7.20 W	Efficacy	78.91 lm/W	Efficiency	100.00%
Sources Flux	568.17 lm	Maximum value	986.30 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
	G	0.0 986.30
	G	5.0 985.27
	G	10.0 898.08
	G	15.0 741.13
	G	20.0 549.31
	G	25.0 357.49
	G	30.0 217.98
	G	35.0 122.07
	G	40.0 61.03
	G	45.0 26.16
	G	50.0 8.72
	G	55.0 0.00
	G	60.0 0.00
	G	65.0 0.00
	G	70.0 0.00
	G	75.0 0.00
	G	80.0 0.00
	G	85.0 0.00
	G	90.0 0.00