

Luminaire


Code 5183-FE-N
Name Dolt Projetor 7W 600LM 4000K 10°
Measurem.
Code 452/2019
Name Dolt Projetor 7W 600LM 4000K 10°

Luminaire Flux	600.77 lm	Luminaire Power	7.20 W	Efficacy	83.44 lm/W	Efficiency	100.00%
Sources Flux	600.77 lm	Maximum value	3708.86 cd	Position	C=0.00 G=1.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	37 mm	Width	84 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	84 mm	Height	0 mm
Horizontal Luminous Area		0.003108 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000752 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-06-2019		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		600.77 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5183-FE-N	LED 7W 600LM 4000K IRC>90 SDMC<3 NICH	600.77	7.20	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		


37mm x 84mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

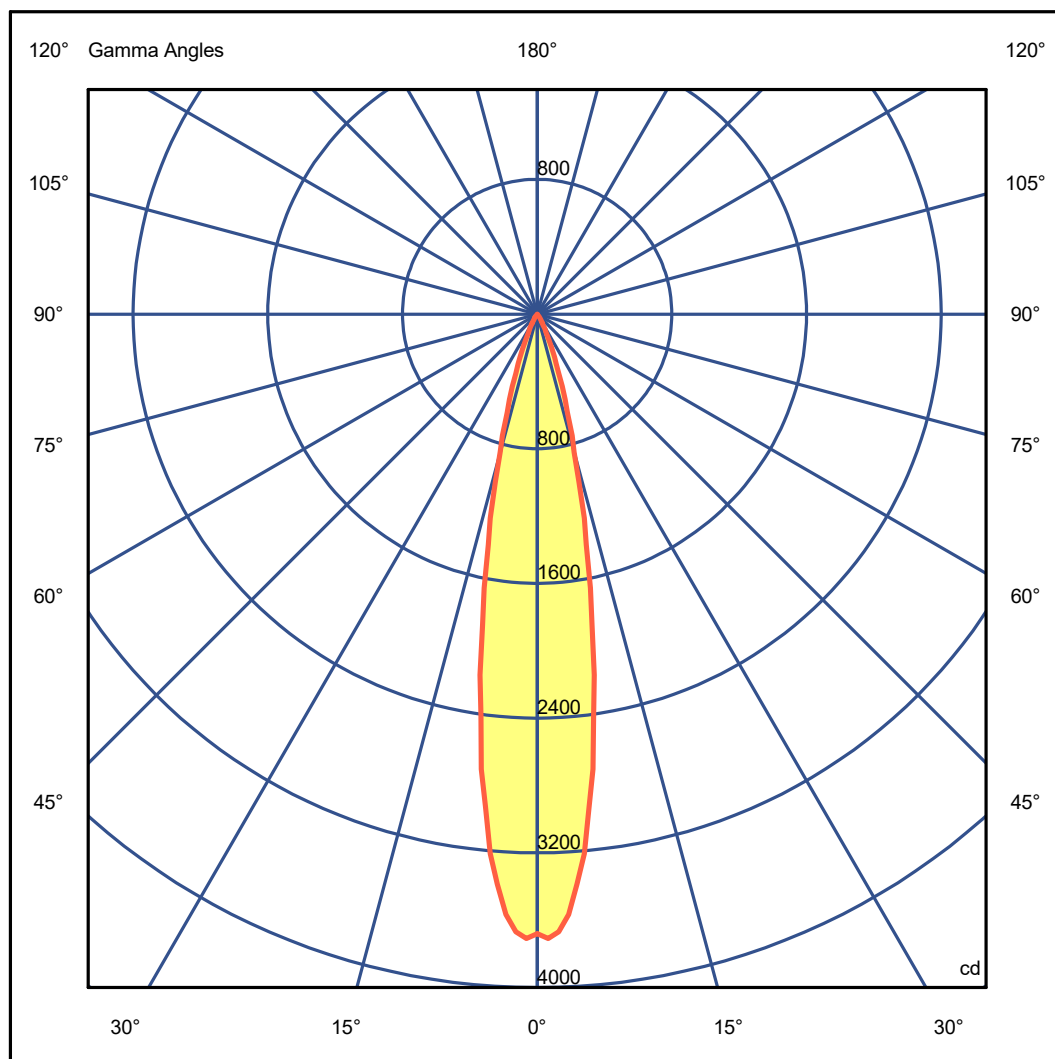

Luminaire

Code 5183-FE-N
Name Dolt Projektor 7W 600LM 4000K 10°

Measurem.

Code 452/2019
Name Dolt Projektor 7W 600LM 4000K 10°

Luminaire Flux	600.77 lm	Luminaire Power	7.20 W	Efficacy	83.44 lm/W	Efficiency	100.00%
Sources Flux	600.77 lm	Maximum value	3708.86 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C 0.00		C 0.00	
	G 0.0	3679.85	G 46.0	0.00
	G 1.0	3708.86	G 47.0	0.00
	G 2.0	3669.41	G 48.0	0.00
	G 3.0	3570.77	G 49.0	0.00
	G 4.0	3393.22	G 50.0	0.00
	G 5.0	3215.66	G 51.0	0.00
	G 6.0	2939.47	G 52.0	0.00
	G 7.0	2722.46	G 53.0	0.00
	G 8.0	2406.82	G 54.0	0.00
	G 9.0	2170.08	G 55.0	0.00
	G 10.0	1874.16	G 56.0	0.00
	G 11.0	1657.15	G 57.0	0.00
	G 12.0	1400.69	G 58.0	0.00
	G 13.0	1242.86	G 59.0	0.00
	G 14.0	1025.86	G 60.0	0.00
	G 15.0	848.30	G 61.0	0.00
	G 16.0	749.66	G 62.0	0.00
	G 17.0	611.57	G 63.0	0.00
	G 18.0	532.66	G 64.0	0.00
	G 19.0	453.74	G 65.0	0.00
	G 20.0	374.83	G 66.0	0.00
	G 21.0	315.65	G 67.0	0.00
	G 22.0	276.19	G 68.0	0.00
	G 23.0	217.01	G 69.0	0.00
	G 24.0	177.55	G 70.0	0.00
	G 25.0	138.10	G 71.0	0.00
	G 26.0	118.37	G 72.0	0.00
	G 27.0	98.64	G 73.0	0.00
	G 28.0	78.91	G 74.0	0.00
	G 29.0	59.18	G 75.0	0.00
	G 30.0	59.18	G 76.0	0.00
	G 31.0	39.46	G 77.0	0.00
	G 32.0	39.46	G 78.0	0.00
	G 33.0	19.73	G 79.0	0.00
	G 34.0	19.73	G 80.0	0.00
	G 35.0	19.73	G 81.0	0.00
	G 36.0	19.73	G 82.0	0.00
	G 37.0	19.73	G 83.0	0.00
	G 38.0	19.73	G 84.0	0.00
	G 39.0	19.73	G 85.0	0.00
	G 40.0	0.00	G 86.0	0.00
	G 41.0	0.00	G 87.0	0.00
	G 42.0	0.00	G 88.0	0.00
	G 43.0	0.00	G 89.0	0.00
	G 44.0	0.00	G 90.0	0.00
	G 45.0	0.00		