

Luminaire

Code 5183-FE-S
Name Dolt Projetor 7W 568LM 2700K 10°

Measurement


Code 446/2019
Name Dolt Projetor 7W 568LM 2700K 10°

Luminaire Flux	568.98 lm	Luminaire Power	7.20 W	Efficacy	79.02 lm/W	Efficiency	100.00%
Sources Flux	568.98 lm	Maximum value	3512.59 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	84 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	84 mm	Height	0 mm	
Horizontal Luminous Area	0.003108 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.000752 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Maximum Gamma Angle	90	Measurement Flux	568.98 lm
Date	04-06-2019	Rated Voltage		Rated Current		Photocell	
Measurement Distance	0.00	Operator		Temperature	25.00 °C	Humidity	60.00 %
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5183-FE-S	LED 7W 568LM 2700K IRC>90 SDMC<3 NICH	568.98	7.20	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		

37mm x 84mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

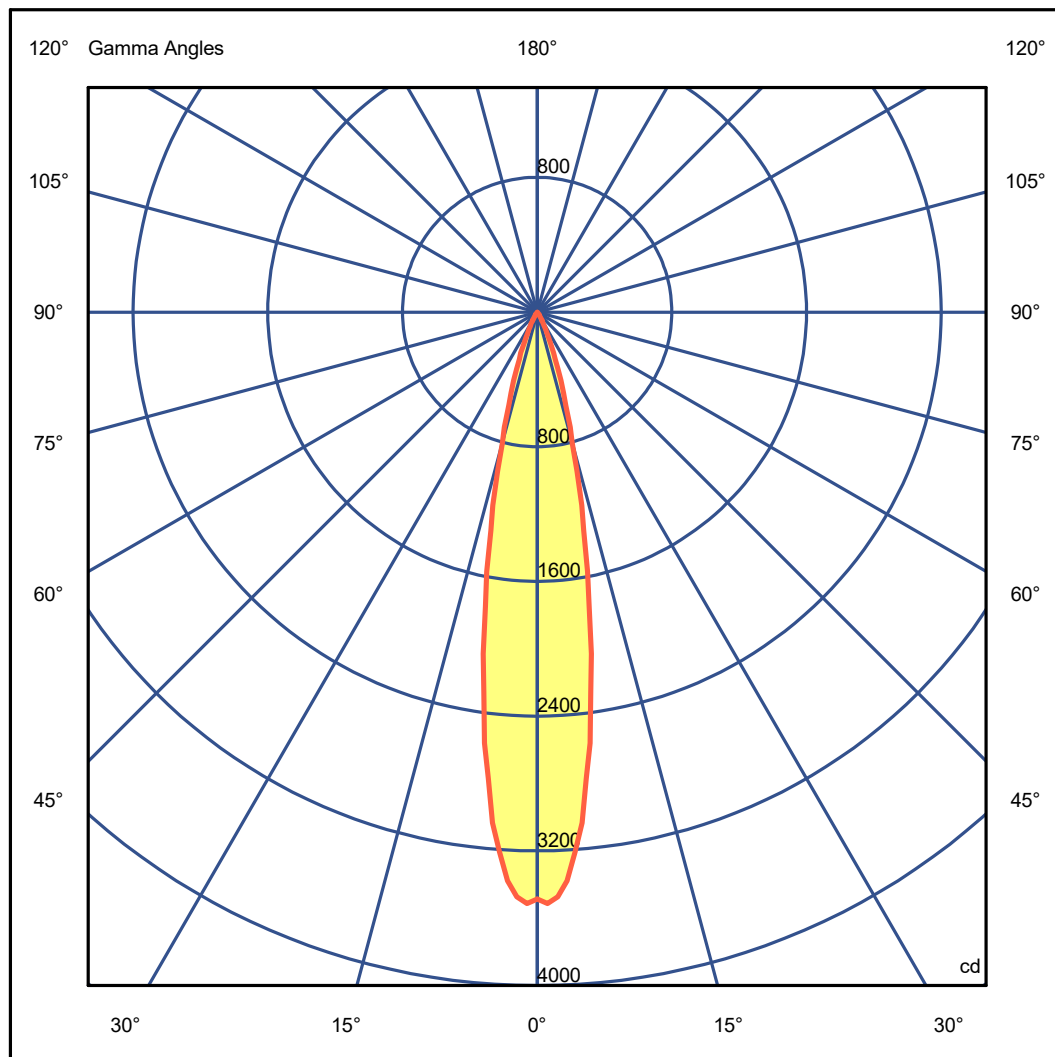

Luminaire

Code 5183-FE-S
Name Dolt Projetor 7W 568LM 2700K 10°

Measurem.

Code 446/2019
Name Dolt Projetor 7W 568LM 2700K 10°

Luminaire Flux	568.98 lm	Luminaire Power	7.20 W	Efficacy	79.02 lm/W	Efficiency	100.00%
Sources Flux	568.98 lm	Maximum value	3512.59 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C 0.00		C 0.00
G 0.0	3485.12	G 46.0	0.00
G 1.0	3512.59	G 47.0	0.00
G 2.0	3475.22	G 48.0	0.00
G 3.0	3381.80	G 49.0	0.00
G 4.0	3213.65	G 50.0	0.00
G 5.0	3045.49	G 51.0	0.00
G 6.0	2783.92	G 52.0	0.00
G 7.0	2578.39	G 53.0	0.00
G 8.0	2279.45	G 54.0	0.00
G 9.0	2055.24	G 55.0	0.00
G 10.0	1774.98	G 56.0	0.00
G 11.0	1569.46	G 57.0	0.00
G 12.0	1326.56	G 58.0	0.00
G 13.0	1177.09	G 59.0	0.00
G 14.0	971.57	G 60.0	0.00
G 15.0	803.41	G 61.0	0.00
G 16.0	709.99	G 62.0	0.00
G 17.0	579.20	G 63.0	0.00
G 18.0	504.47	G 64.0	0.00
G 19.0	429.73	G 65.0	0.00
G 20.0	355.00	G 66.0	0.00
G 21.0	298.94	G 67.0	0.00
G 22.0	261.58	G 68.0	0.00
G 23.0	205.52	G 69.0	0.00
G 24.0	168.16	G 70.0	0.00
G 25.0	130.79	G 71.0	0.00
G 26.0	112.10	G 72.0	0.00
G 27.0	93.42	G 73.0	0.00
G 28.0	74.74	G 74.0	0.00
G 29.0	56.05	G 75.0	0.00
G 30.0	56.05	G 76.0	0.00
G 31.0	37.37	G 77.0	0.00
G 32.0	37.37	G 78.0	0.00
G 33.0	18.68	G 79.0	0.00
G 34.0	18.68	G 80.0	0.00
G 35.0	18.68	G 81.0	0.00
G 36.0	18.68	G 82.0	0.00
G 37.0	18.68	G 83.0	0.00
G 38.0	18.68	G 84.0	0.00
G 39.0	18.68	G 85.0	0.00
G 40.0	0.00	G 86.0	0.00
G 41.0	0.00	G 87.0	0.00
G 42.0	0.00	G 88.0	0.00
G 43.0	0.00	G 89.0	0.00
G 44.0	0.00	G 90.0	0.00
G 45.0	0.00		