

Luminaire

Code 5186-AB-N
 Name Dolt Projetor 14W 1136LM 4000K 36°

Measurment.


Code 454/2019
 Name Dolt Projetor 14W 1136LM 4000K 36°

Luminaire Flux	1200.16 lm	Luminaire Power	14.00 W	Efficacy	85.73 lm/W	Efficiency	100.00%
Sources Flux	1200.16 lm	Maximum value	2083.36 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	84 mm	Height	1 mm
Rectangular Luminous Area		Length	74 mm	Width	84 mm	Height	0 mm
Horizontal Luminous Area	0.006216 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001504 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	07-06-2019			Maximum Gamma Angle	90		
Measurement Distance	0.00			Measurement Flux	1200.16 lm		
Operator				Rated Voltage			
Temperature	25.00 °C			Rated Current			
Humidity	60.00 %			Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5186-AB-N	LED 14W 1136LM 4000K IRC>90 SDMC<3 NIC20016	1200.16	14.00	1
C.I.E.	97 100 100 100 100	D DIN 5040	A60		
F UTE	1.00 A	B NBN	BZ 1		


74mm x 84mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

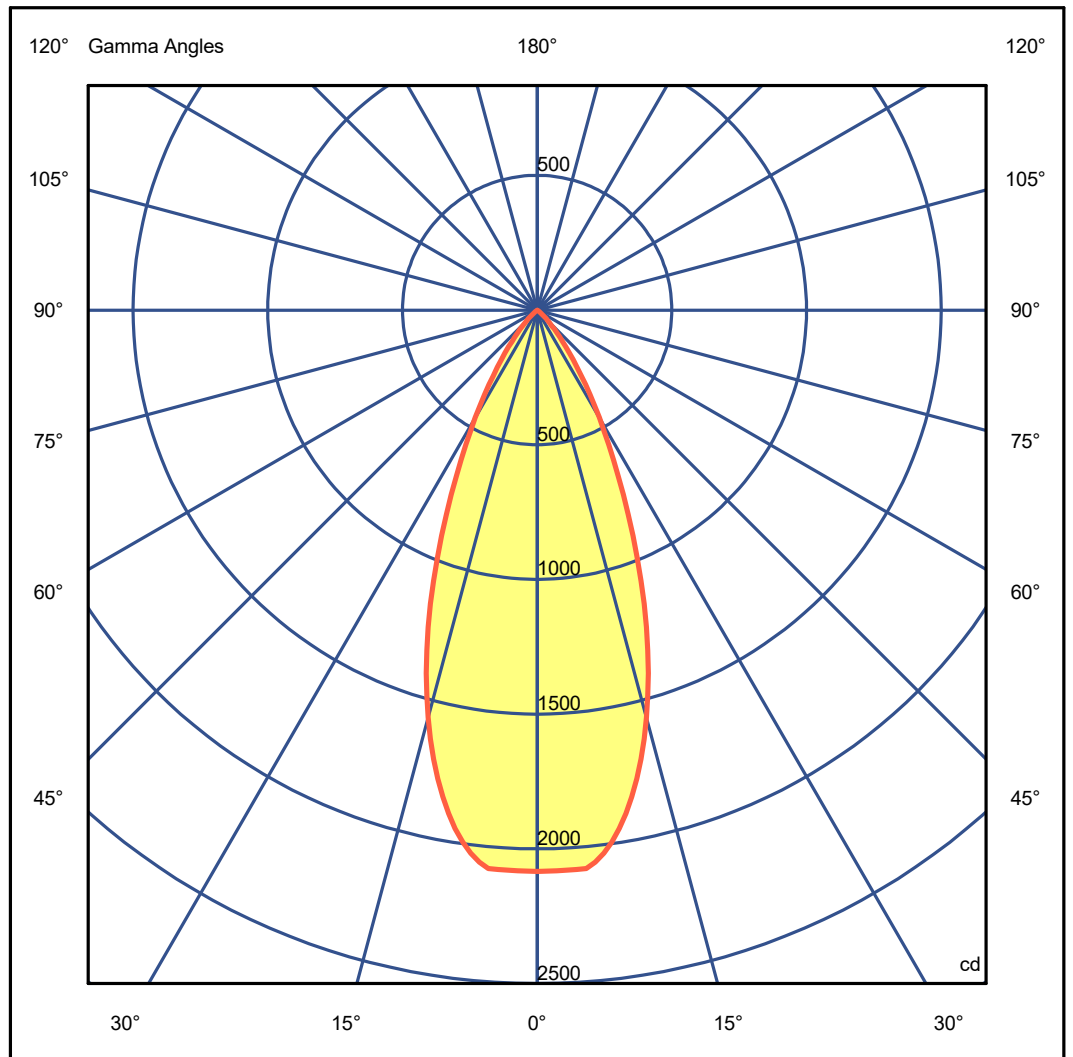

Luminaire

Code 5186-AB-N
 Name Dolt Projetor 14W 1136LM 4000K 36°

Measurem.

Code 454/2019
 Name Dolt Projetor 14W 1136LM 4000K 36°

Luminaire Flux	1200.16 lm	Luminaire Power	14.00 W	Efficacy	85.73 lm/W	Efficiency	100.00%
Sources Flux	1200.16 lm	Maximum value	2083.36 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00	
G 0.0	2083.36
G 5.0	2081.19
G 10.0	1897.01
G 15.0	1565.50
G 20.0	1160.31
G 25.0	755.12
G 30.0	460.44
G 35.0	257.85
G 40.0	128.92
G 45.0	55.25
G 50.0	18.42
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00