

**Luminaire**

Code 5186-AB-S  
 Name Dolt Projetor 14W 1136LM 2700K 36°


**Measurement**

Code 450/2019  
 Name Dolt Projetor 14W 1136LM 2700K 36°

Luminaire Flux	1136.05 lm	Luminaire Power	14.00 W	Efficacy	81.15 lm/W	Efficiency	100.00%
Sources Flux	1136.05 lm	Maximum value	2280.96 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	84 mm	Height	1 mm
Rectangular Luminous Area		Length	74 mm	Width	84 mm	Height	0 mm
Horizontal Luminous Area	0.006216 m2			Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°			0.001504 m2
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle		Rotosymmetrical	
Date	05-06-2019	Measurement Flux				90	
Measurement Distance	0.00					1136.05 lm	
Operator		Rated Voltage		Rated Current			
Temperature	25.00 °C	Photocell					
Humidity	60.00 %						
Notes							

**Luminaire Sources**

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5186-AB-S	LED 14W 1136LM 2700K IRC>90 SDMC<3 NICHIA	1136.05	14.00	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		

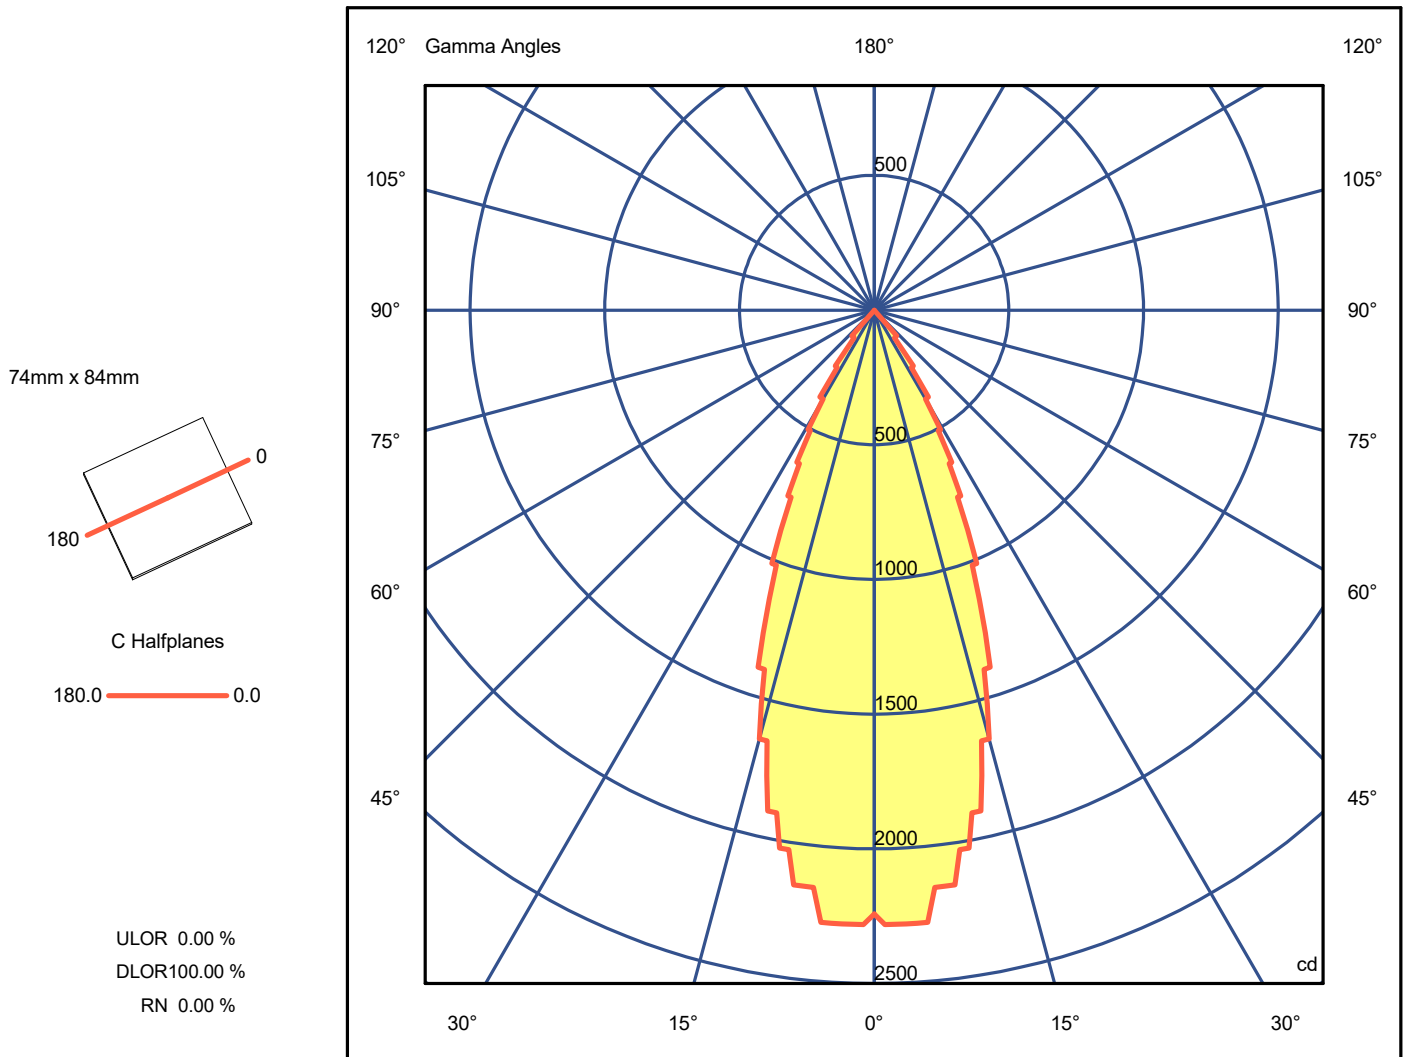

**Luminaire**

Code 5186-AB-S  
 Name Dolt Projetor 14W 1136LM 2700K 36°

**Measurem.**

Code 450/2019  
 Name Dolt Projetor 14W 1136LM 2700K 36°

Luminaire Flux	1136.05 lm	Luminaire Power	14.00 W	Efficacy	81.15 lm/W	Efficiency	100.00%
Sources Flux	1136.05 lm	Maximum value	2280.96 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical

**Luminous Intensity Table cd Table 1/1**

	C 0.00	C 0.00
G 0.0	2241.97	G 46.0 0.00
G 1.0	2280.96	G 47.0 0.00
G 2.0	2280.96	G 48.0 0.00
G 3.0	2280.96	G 49.0 0.00
G 4.0	2280.96	G 50.0 0.00
G 5.0	2280.96	G 51.0 0.00
G 6.0	2154.24	G 52.0 0.00
G 7.0	2154.24	G 53.0 0.00
G 8.0	2154.24	G 54.0 0.00
G 9.0	2027.52	G 55.0 0.00
G 10.0	2027.52	G 56.0 0.00
G 11.0	1900.80	G 57.0 0.00
G 12.0	1900.80	G 58.0 0.00
G 13.0	1774.08	G 59.0 0.00
G 14.0	1647.36	G 60.0 0.00
G 15.0	1647.36	G 61.0 0.00
G 16.0	1520.64	G 62.0 0.00
G 17.0	1393.92	G 63.0 0.00
G 18.0	1393.92	G 64.0 0.00
G 19.0	1267.20	G 65.0 0.00
G 20.0	1140.48	G 66.0 0.00
G 21.0	1013.76	G 67.0 0.00
G 22.0	1013.76	G 68.0 0.00
G 23.0	887.04	G 69.0 0.00
G 24.0	760.32	G 70.0 0.00
G 25.0	760.32	G 71.0 0.00
G 26.0	633.60	G 72.0 0.00
G 27.0	633.60	G 73.0 0.00
G 28.0	506.88	G 74.0 0.00
G 29.0	506.88	G 75.0 0.00
G 30.0	380.16	G 76.0 0.00
G 31.0	380.16	G 77.0 0.00
G 32.0	380.16	G 78.0 0.00
G 33.0	253.44	G 79.0 0.00
G 34.0	253.44	G 80.0 0.00
G 35.0	253.44	G 81.0 0.00
G 36.0	126.72	G 82.0 0.00
G 37.0	126.72	G 83.0 0.00
G 38.0	126.72	G 84.0 0.00
G 39.0	126.72	G 85.0 0.00
G 40.0	126.72	G 86.0 0.00
G 41.0	126.72	G 87.0 0.00
G 42.0	0.00	G 88.0 0.00
G 43.0	0.00	G 89.0 0.00
G 44.0	0.00	G 90.0 0.00
G 45.0	0.00	