

Luminaire

Code 5186-FE-N
Name Dolt Projetor 14W 1200LM 4000K 10°

Measurement


Code 455/2019
Name Dolt Projetor 14W 1200LM 4000K 10°

Luminaire Flux	1200.44 lm	Luminaire Power	14.00 W	Efficacy	85.75 lm/W	Efficiency	100.00%
Sources Flux	1200.44 lm	Maximum value	7410.96 cd	Position	C=0.00 G=1.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	74 mm	Width	84 mm	Height	1 mm
Rectangular Luminous Area		Length	74 mm	Width	84 mm	Height	0 mm
Horizontal Luminous Area		0.006216 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001504 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-06-2019		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1200.44 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5186-FE-N	LED 14W 1200LM 4000K IRC>90 SDMC<3 NICHIA	1200.44	14.00	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		

74mm x 84mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

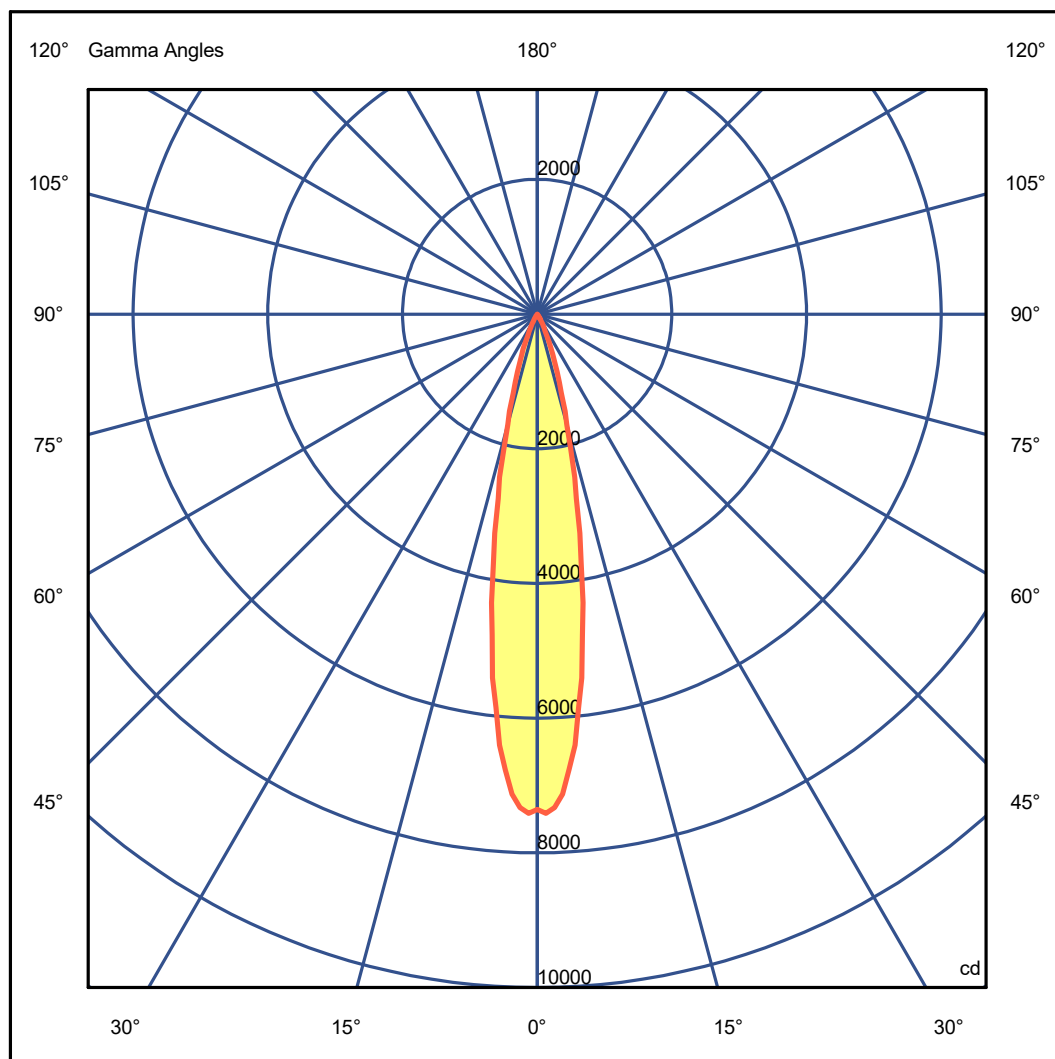

Luminaire

Code 5186-FE-N
Name Dolt Proietor 14W 1200LM 4000K 10°

Measurem.

Code 455/2019
Name Dolt Proietor 14W 1200LM 4000K 10°

Luminaire Flux	1200.44 lm	Luminaire Power	14.00 W	Efficacy	85.75 lm/W	Efficiency	100.00%
Sources Flux	1200.44 lm	Maximum value	7410.96 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00		C 0.00	
G 0.0	7352.99	G 46.0	0.00
G 1.0	7410.96	G 47.0	0.00
G 2.0	7332.12	G 48.0	0.00
G 3.0	7135.02	G 49.0	0.00
G 4.0	6780.24	G 50.0	0.00
G 5.0	6425.46	G 51.0	0.00
G 6.0	5873.58	G 52.0	0.00
G 7.0	5439.96	G 53.0	0.00
G 8.0	4809.24	G 54.0	0.00
G 9.0	4336.20	G 55.0	0.00
G 10.0	3744.90	G 56.0	0.00
G 11.0	3311.28	G 57.0	0.00
G 12.0	2798.82	G 58.0	0.00
G 13.0	2483.46	G 59.0	0.00
G 14.0	2049.84	G 60.0	0.00
G 15.0	1695.06	G 61.0	0.00
G 16.0	1497.96	G 62.0	0.00
G 17.0	1222.02	G 63.0	0.00
G 18.0	1064.34	G 64.0	0.00
G 19.0	906.66	G 65.0	0.00
G 20.0	748.98	G 66.0	0.00
G 21.0	630.72	G 67.0	0.00
G 22.0	551.88	G 68.0	0.00
G 23.0	433.62	G 69.0	0.00
G 24.0	354.78	G 70.0	0.00
G 25.0	275.94	G 71.0	0.00
G 26.0	236.52	G 72.0	0.00
G 27.0	197.10	G 73.0	0.00
G 28.0	157.68	G 74.0	0.00
G 29.0	118.26	G 75.0	0.00
G 30.0	118.26	G 76.0	0.00
G 31.0	78.84	G 77.0	0.00
G 32.0	78.84	G 78.0	0.00
G 33.0	39.42	G 79.0	0.00
G 34.0	39.42	G 80.0	0.00
G 35.0	39.42	G 81.0	0.00
G 36.0	39.42	G 82.0	0.00
G 37.0	39.42	G 83.0	0.00
G 38.0	39.42	G 84.0	0.00
G 39.0	39.42	G 85.0	0.00
G 40.0	0.00	G 86.0	0.00
G 41.0	0.00	G 87.0	0.00
G 42.0	0.00	G 88.0	0.00
G 43.0	0.00	G 89.0	0.00
G 44.0	0.00	G 90.0	0.00
G 45.0	0.00		