

Luminaire

Code 5186-FE-S
Name Dolt Projetor 14W 1136LM 2700K 10°

Measurem.


Code 445/2019
Name Dolt Projetor 14W 1136LM 2700K 10°

Luminaire Flux	1136.55 lm	Luminaire Power	14.30 W	Efficacy	79.48 lm/W	Efficiency	100.00%
Sources Flux	1136.55 lm	Maximum value	5943.78 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	84 mm	Height	1 mm
Rectangular Luminous Area		Length	74 mm	Width	84 mm	Height	0 mm
Horizontal Luminous Area		0.006216 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001504 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-06-2019		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1136.55 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5186-FE-S	LED 14W 1136LM 2700K IRC>90 SDMC<3 NICHIA	1136.55	14.30	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		

74mm x 84mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

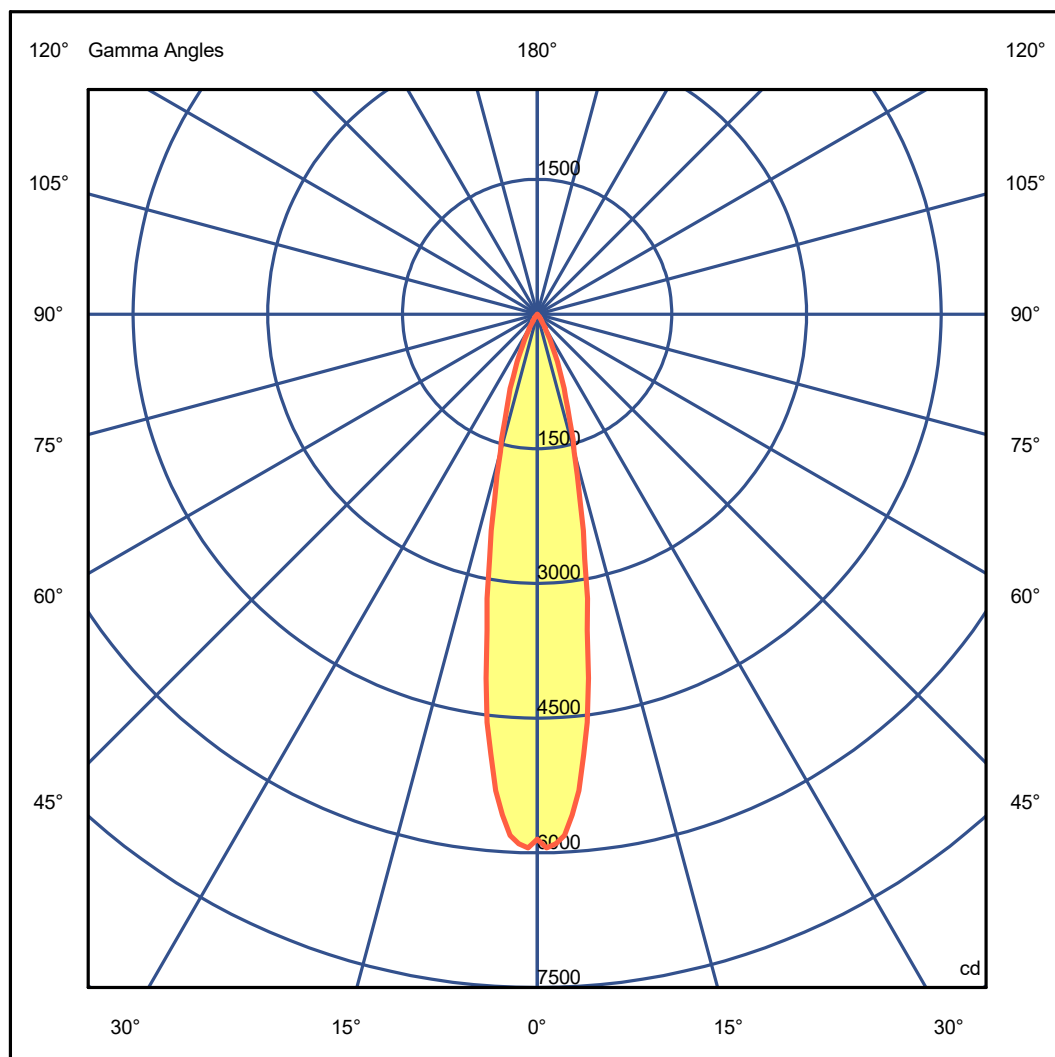

Luminaire

Code 5186-FE-S
Name Dolt Proietor 14W 1136LM 2700K 10°

Measurem.

Code 445/2019
Name Dolt Proietor 14W 1136LM 2700K 10°

Luminaire Flux	1136.55 lm	Luminaire Power	14.30 W	Efficacy	79.48 lm/W	Efficiency	100.00%
Sources Flux	1136.55 lm	Maximum value	5943.78 cd	Position	C=0.00 G=1.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C 0.00		C 0.00
G 0.0	5845.56	G 46.0	0.00
G 1.0	5943.78	G 47.0	0.00
G 2.0	5899.75	G 48.0	0.00
G 3.0	5811.70	G 49.0	0.00
G 4.0	5591.56	G 50.0	0.00
G 5.0	5327.39	G 51.0	0.00
G 6.0	4931.14	G 52.0	0.00
G 7.0	4578.91	G 53.0	0.00
G 8.0	4094.60	G 54.0	0.00
G 9.0	3566.27	G 55.0	0.00
G 10.0	3214.04	G 56.0	0.00
G 11.0	2773.76	G 57.0	0.00
G 12.0	2465.57	G 58.0	0.00
G 13.0	2113.34	G 59.0	0.00
G 14.0	1849.18	G 60.0	0.00
G 15.0	1585.01	G 61.0	0.00
G 16.0	1452.92	G 62.0	0.00
G 17.0	1232.78	G 63.0	0.00
G 18.0	1100.70	G 64.0	0.00
G 19.0	968.62	G 65.0	0.00
G 20.0	880.56	G 66.0	0.00
G 21.0	748.48	G 67.0	0.00
G 22.0	660.42	G 68.0	0.00
G 23.0	572.36	G 69.0	0.00
G 24.0	484.31	G 70.0	0.00
G 25.0	396.25	G 71.0	0.00
G 26.0	352.22	G 72.0	0.00
G 27.0	308.20	G 73.0	0.00
G 28.0	220.14	G 74.0	0.00
G 29.0	176.11	G 75.0	0.00
G 30.0	176.11	G 76.0	0.00
G 31.0	132.08	G 77.0	0.00
G 32.0	88.06	G 78.0	0.00
G 33.0	88.06	G 79.0	0.00
G 34.0	88.06	G 80.0	0.00
G 35.0	44.03	G 81.0	0.00
G 36.0	44.03	G 82.0	0.00
G 37.0	44.03	G 83.0	0.00
G 38.0	44.03	G 84.0	0.00
G 39.0	44.03	G 85.0	0.00
G 40.0	0.00	G 86.0	0.00
G 41.0	0.00	G 87.0	0.00
G 42.0	0.00	G 88.0	0.00
G 43.0	0.00	G 89.0	0.00
G 44.0	0.00	G 90.0	0.00
G 45.0	0.00		