

Luminaire

Code 5200-MA-S
Name Dolt Pontual Dali 3W 230LM 2700K 48°

Measurem.


Code 53/2020
Name Dolt Pontual Dali 3W 230LM 2700K 48°

Luminaire Flux	230.60 lm	Luminaire Power	7.40 W	Efficacy	31.16 lm/W	Efficiency	100.00%
Sources Flux	230.60 lm	Maximum value	464.00 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	130 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	130 mm	Height	0 mm	
Horizontal Luminous Area	0.004810 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001164 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	03-02-2020	Maximum Gamma Angle	90				
Measurement Distance	0.00	Measurement Flux	230.60 lm				
Operator		Rated Voltage					
Temperature	25.00 °C	Rated Current					
Humidity	60.00 %	Photocell					
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5200-MA-S	LED 3W 230LM 2700K IRC>90 SDMC<3 NICHIA	230.60	7.40	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		

37mm x 130mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

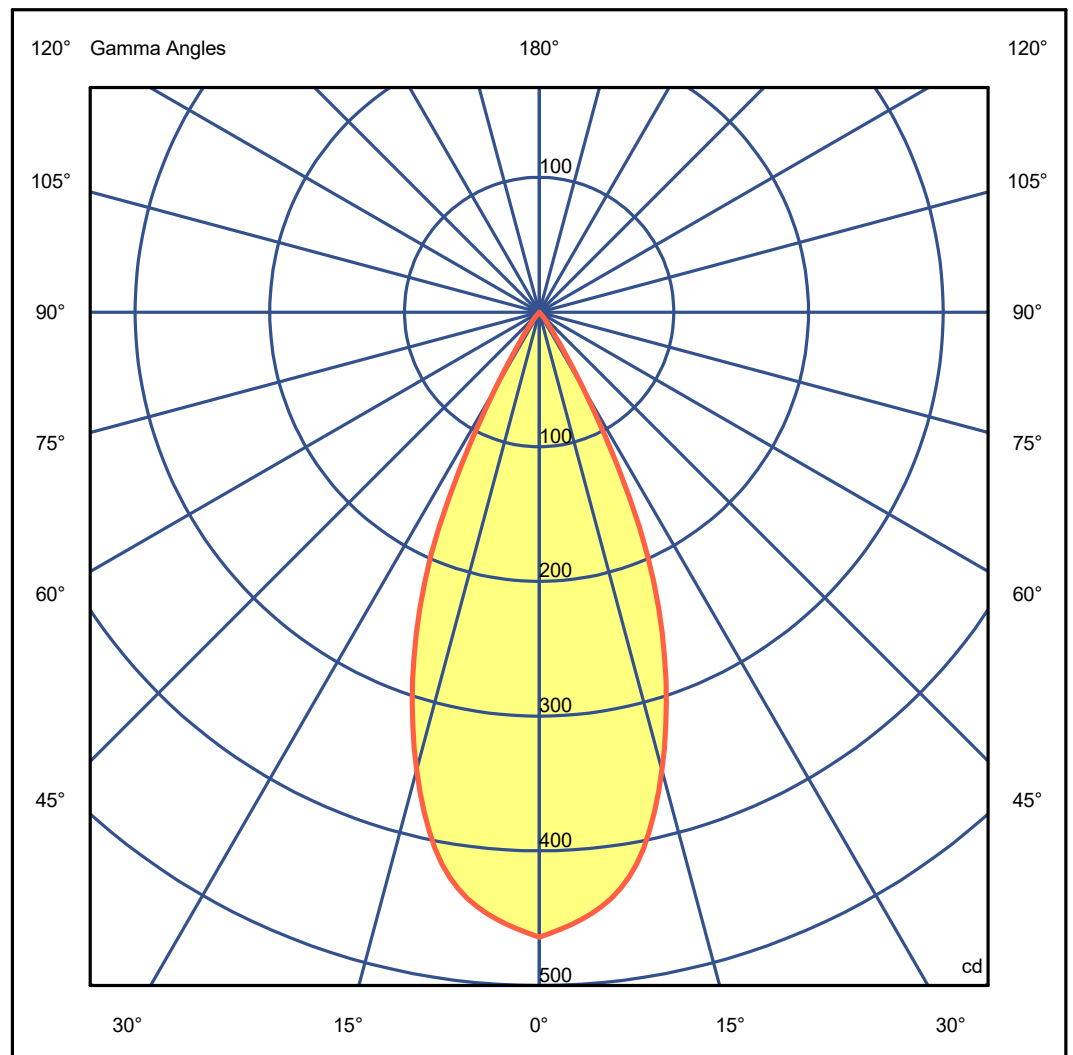

Luminaire

Code 5200-MA-S
Name Dolt Pontual Dali 3W 230LM 2700K 48°

Measurem.

Code 53/2020
Name Dolt Pontual Dali 3W 230LM 2700K 48°

Luminaire Flux	230.60 lm	Luminaire Power	7.40 W	Efficacy	31.16 lm/W	Efficiency	100.00%
Sources Flux	230.60 lm	Maximum value	464.00 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
G 0.0		464.00
G 5.0		448.00
G 10.0		416.00
G 15.0		352.00
G 20.0		272.00
G 25.0		176.00
G 30.0		64.00
G 35.0		16.00
G 40.0		0.00
G 45.0		0.00
G 50.0		0.00
G 55.0		0.00
G 60.0		0.00
G 65.0		0.00
G 70.0		0.00
G 75.0		0.00
G 80.0		0.00
G 85.0		0.00
G 90.0		0.00