

Luminaire

Code 5201-AB-N
 Name Dolt Pontual Dali 7W 600LM 4000K 36°

Measurement


Code 102/2020
 Name Dolt Pontual Dali 7W 600LM 4000K 36°

Luminaire Flux	600.30 lm	Luminaire Power	7.20 W	Efficacy	83.37 lm/W	Efficiency	100.00%
Sources Flux	600.30 lm	Maximum value	1529.54 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	130 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	130 mm	Height	0 mm	
Horizontal Luminous Area	0.004810 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001164 m2
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Glare area at 76°	0.001164 m2		
Emitting area on Plane 90°	0.000000 m2						
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	17-04-2020	Maximum Gamma Angle	90				
Measurement Distance	0.00	Measurement Flux	600.30 lm				
Operator		Rated Voltage					
Temperature	25.00 °C	Rated Current					
Humidity	60.00 %	Photocell					
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5201-AB-N	LED 7W 600LM 4000K IRC>90 SDMC<3 NICH	600.30	7.20	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		


37mm x 130mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

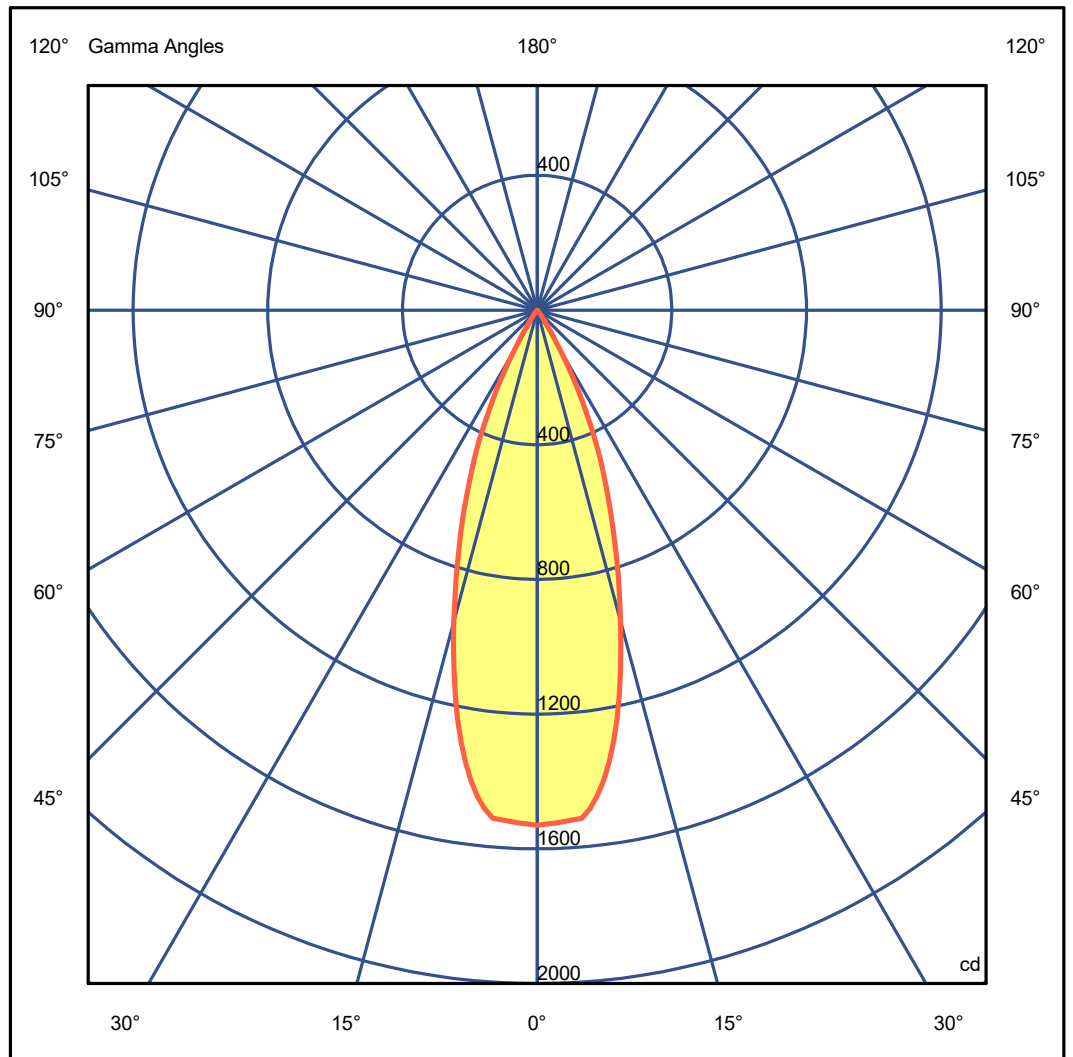

Luminaire

Code 5201-AB-N
 Name Dolt Pontual Dali 7W 600LM 4000K 36°

Measurem.

Code 102/2020
 Name Dolt Pontual Dali 7W 600LM 4000K 36°

Luminaire Flux	600.30 lm	Luminaire Power	7.20 W	Efficacy	83.37 lm/W	Efficiency	100.00%
Sources Flux	600.30 lm	Maximum value	1529.54 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00	
G 0.0	1529.54
G 5.0	1514.77
G 10.0	1302.17
G 15.0	956.70
G 20.0	637.80
G 25.0	372.05
G 30.0	132.88
G 35.0	26.57
G 40.0	0.00
G 45.0	0.00
G 50.0	0.00
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00