

Luminaire

Code 5201-AB-S
 Name Dolt Pontual Dali 7W 568LM 2700K 36°

Measurement


Code 103/2020
 Name Dolt Pontual Dali 7W 568LM 2700K 36°

Luminaire Flux	568.75 lm	Luminaire Power	7.20 W	Efficacy	78.99 lm/W	Efficiency	100.00%
Sources Flux	568.75 lm	Maximum value	1815.60 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	130 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	130 mm	Height	0 mm	
Horizontal Luminous Area	0.004810 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001164 m2
Coordinate system	CG	Symmetry Type	Maximum Gamma Angle	Measurement Flux	90		
Date	17-04-2020				568.75 lm		
Measurement Distance	0.00						
Operator		Rated Voltage					
Temperature	25.00 °C	Rated Current					
Humidity	60.00 %	Photocell					
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5201-AB-S	LED 7W 568LM 2700K IRC>90 SDMC<3 NICH	568.75	7.20	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		


37mm x 130mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

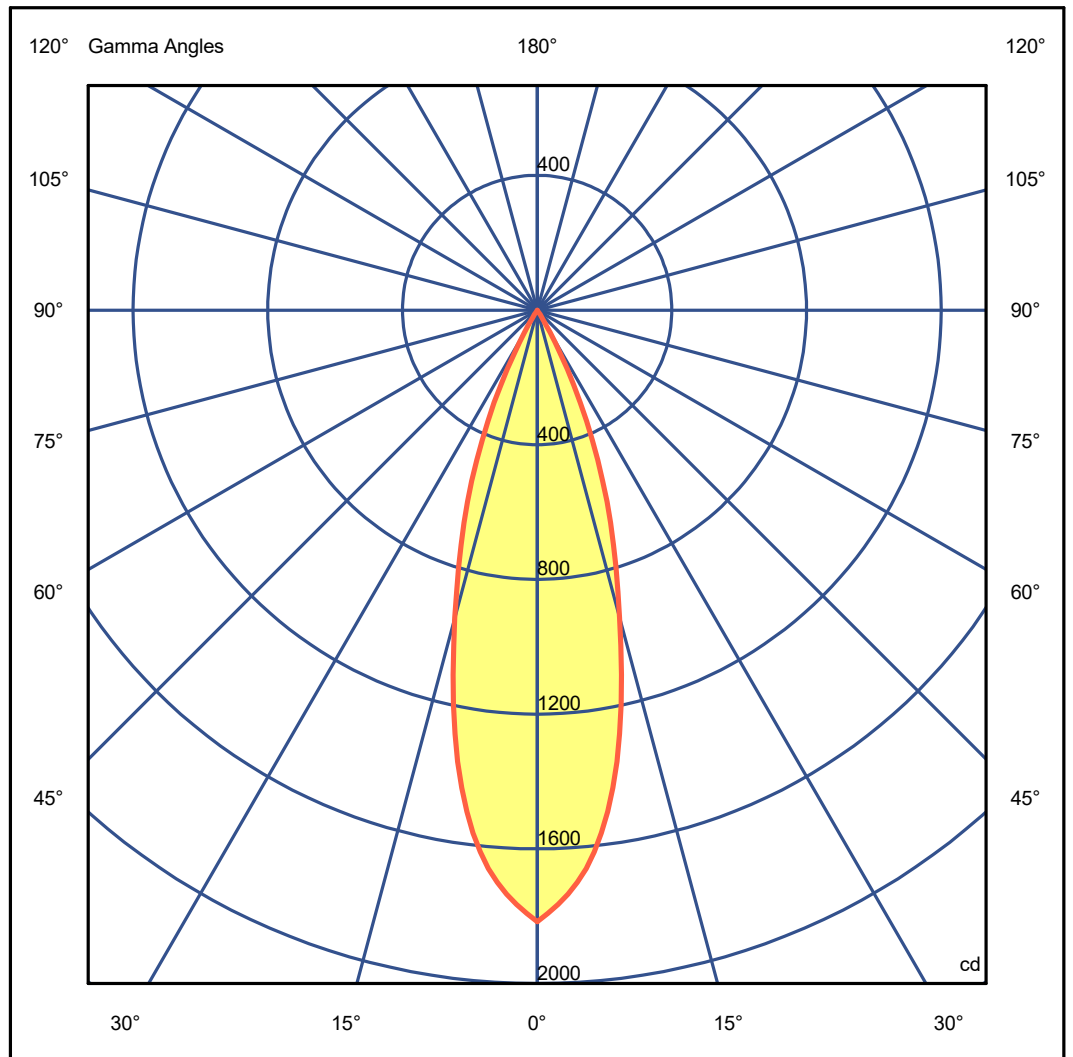

Luminaire

Code 5201-AB-S
 Name Dolt Pontual Dali 7W 568LM 2700K 36°

Measurem.

Code 103/2020
 Name Dolt Pontual Dali 7W 568LM 2700K 36°

Luminaire Flux	568.75 lm	Luminaire Power	7.20 W	Efficacy	78.99 lm/W	Efficiency	100.00%
Sources Flux	568.75 lm	Maximum value	1815.60 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00	
G 0.0	1815.60
G 5.0	1664.30
G 10.0	1361.70
G 15.0	945.62
G 20.0	605.20
G 25.0	302.60
G 30.0	75.65
G 35.0	0.00
G 40.0	0.00
G 45.0	0.00
G 50.0	0.00
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00