

**Luminaire**

Code 5201-FE-N  
 Name Dolt Pontual Dali 7W 600LM 4000K 10°

**Measurem.**


Code 100/2020  
 Name Dolt Pontual Dali 7W 600LM 4000K 10°

|                            |             |                  |            |                             |               |                 |                 |
|----------------------------|-------------|------------------|------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux             | 600.61 lm   | Luminaire Power  | 7.10 W     | Efficacy                    | 84.59 lm/W    | Efficiency      | 100.00%         |
| Sources Flux               | 600.61 lm   | Maximum value    | 5378.80 cd | Position                    | C=0.00 G=0.00 | CG              | Rotosymmetrical |
| Rectangular Luminaire      |             | Length           | 37 mm      | Width                       | 130 mm        | Height          | 1 mm            |
| Rectangular Luminous Area  |             | Length           | 37 mm      | Width                       | 130 mm        | Height          | 0 mm            |
| Horizontal Luminous Area   | 0.004810 m2 |                  |            | Emitting area on Plane 180° | 0.000000 m2   |                 |                 |
| Emitting area on Plane 0°  | 0.000000 m2 |                  |            | Emitting area on Plane 270° | 0.000000 m2   |                 |                 |
| Emitting area on Plane 90° | 0.000000 m2 |                  |            | Glare area at 76°           | 0.001164 m2   |                 |                 |
| Coordinate system          | CG          | Symmetry Type    |            | Maximum Gamma Angle         | 90            | Rotosymmetrical |                 |
| Date                       | 17-04-2020  | Measurement Flux |            |                             | 600.61 lm     |                 |                 |
| Measurement Distance       | 0.00        |                  |            |                             |               |                 |                 |
| Operator                   |             | Rated Voltage    |            | Rated Current               |               | Photocell       |                 |
| Temperature                | 25.00 °C    |                  |            |                             |               |                 |                 |
| Humidity                   | 60.00 %     |                  |            |                             |               |                 |                 |
| Notes                      |             |                  |            |                             |               |                 |                 |

**Luminaire Sources**

| Line   | Code                | Name                                  | Flux [lm] | Pow. [W] | Q.ty |
|--------|---------------------|---------------------------------------|-----------|----------|------|
|        | 5201-FE-N           | LED 7W 600LM 4000K IRC>90 SDMC<3 NICH | 600.61    | 7.10     | 1    |
| C.I.E. | 100 100 100 100 100 | D DIN 5040                            | A60       |          |      |
| F UTE  | -                   | B NBN                                 | BZ 1      |          |      |


37mm x 130mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

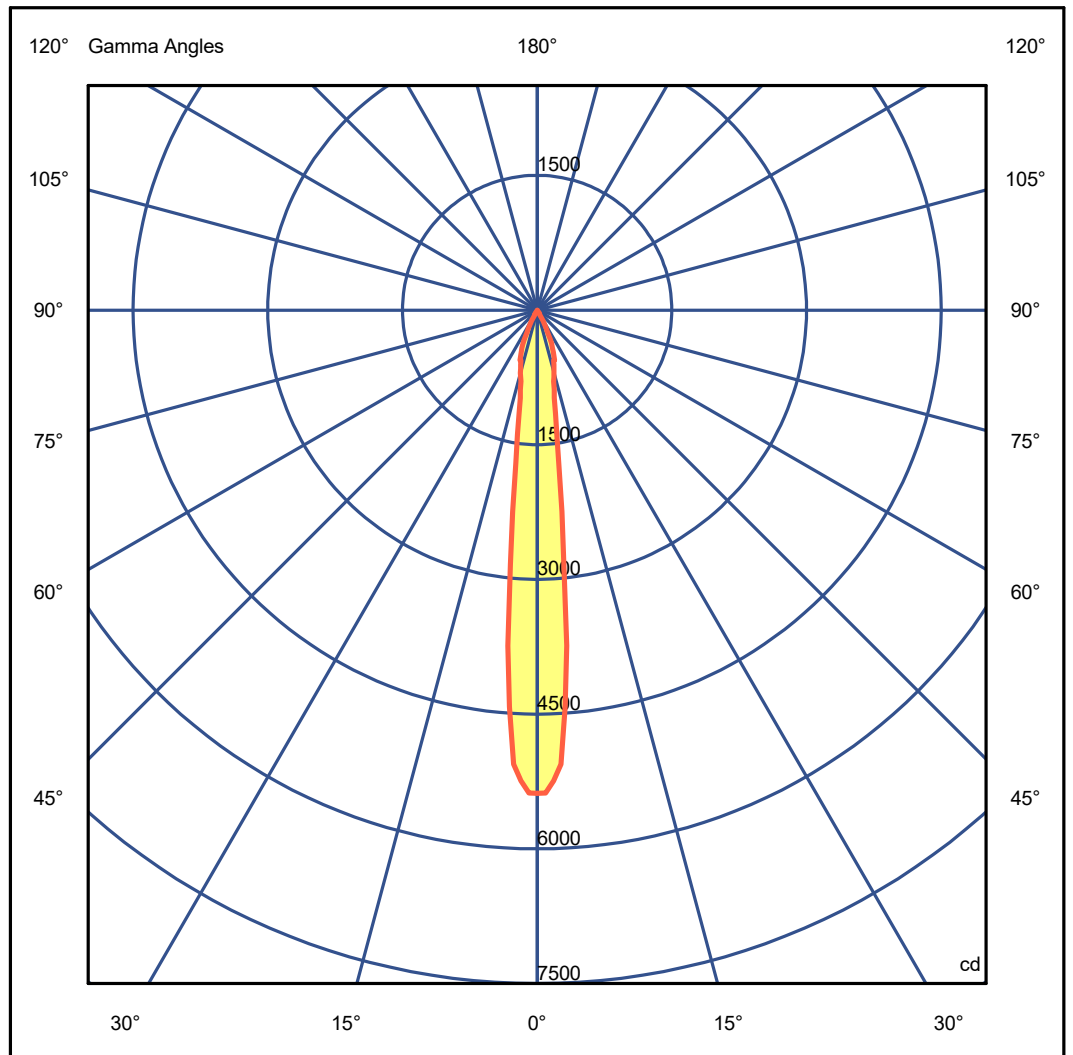

**Luminaire**

Code 5201-FE-N  
 Name Dolt Pontual Dali 7W 600LM 4000K 10°

**Measurem.**

Code 100/2020  
 Name Dolt Pontual Dali 7W 600LM 4000K 10°

|                |           |                 |            |          |               |            |                 |
|----------------|-----------|-----------------|------------|----------|---------------|------------|-----------------|
| Luminaire Flux | 600.61 lm | Luminaire Power | 7.10 W     | Efficacy | 84.59 lm/W    | Efficiency | 100.00%         |
| Sources Flux   | 600.61 lm | Maximum value   | 5378.80 cd | Position | C=0.00 G=0.00 | CG         | Rotosymmetrical |

**Luminous Intensity Table cd Table 1/1**

|        | C 0.00  | C 0.00      |
|--------|---------|-------------|
| G 0.0  | 5378.80 | G 46.0 0.00 |
| G 1.0  | 5378.80 | G 47.0 0.00 |
| G 2.0  | 5243.20 | G 48.0 0.00 |
| G 3.0  | 5062.40 | G 49.0 0.00 |
| G 4.0  | 4429.60 | G 50.0 0.00 |
| G 5.0  | 3751.60 | G 51.0 0.00 |
| G 6.0  | 2847.60 | G 52.0 0.00 |
| G 7.0  | 2260.00 | G 53.0 0.00 |
| G 8.0  | 1717.60 | G 54.0 0.00 |
| G 9.0  | 1401.20 | G 55.0 0.00 |
| G 10.0 | 1175.20 | G 56.0 0.00 |
| G 11.0 | 994.40  | G 57.0 0.00 |
| G 12.0 | 904.00  | G 58.0 0.00 |
| G 13.0 | 813.60  | G 59.0 0.00 |
| G 14.0 | 768.40  | G 60.0 0.00 |
| G 15.0 | 723.20  | G 61.0 0.00 |
| G 16.0 | 678.00  | G 62.0 0.00 |
| G 17.0 | 632.80  | G 63.0 0.00 |
| G 18.0 | 587.60  | G 64.0 0.00 |
| G 19.0 | 587.60  | G 65.0 0.00 |
| G 20.0 | 542.40  | G 66.0 0.00 |
| G 21.0 | 497.20  | G 67.0 0.00 |
| G 22.0 | 452.00  | G 68.0 0.00 |
| G 23.0 | 406.80  | G 69.0 0.00 |
| G 24.0 | 361.60  | G 70.0 0.00 |
| G 25.0 | 271.20  | G 71.0 0.00 |
| G 26.0 | 226.00  | G 72.0 0.00 |
| G 27.0 | 180.80  | G 73.0 0.00 |
| G 28.0 | 135.60  | G 74.0 0.00 |
| G 29.0 | 90.40   | G 75.0 0.00 |
| G 30.0 | 45.20   | G 76.0 0.00 |
| G 31.0 | 45.20   | G 77.0 0.00 |
| G 32.0 | 45.20   | G 78.0 0.00 |
| G 33.0 | 45.20   | G 79.0 0.00 |
| G 34.0 | 45.20   | G 80.0 0.00 |
| G 35.0 | 0.00    | G 81.0 0.00 |
| G 36.0 | 0.00    | G 82.0 0.00 |
| G 37.0 | 0.00    | G 83.0 0.00 |
| G 38.0 | 0.00    | G 84.0 0.00 |
| G 39.0 | 0.00    | G 85.0 0.00 |
| G 40.0 | 0.00    | G 86.0 0.00 |
| G 41.0 | 0.00    | G 87.0 0.00 |
| G 42.0 | 0.00    | G 88.0 0.00 |
| G 43.0 | 0.00    | G 89.0 0.00 |
| G 44.0 | 0.00    | G 90.0 0.00 |
| G 45.0 | 0.00    |             |