

Luminaire

Code 5201-FE-S
Name Dolt Pontual Dali 7W 568LM 2700K 10°

Measurem.


Code 101/2020
Name Dolt Pontual Dali 7W 568LM 2700K 10°

Luminaire Flux	568.06 lm	Luminaire Power	7.10 W	Efficacy	80.01 lm/W	Efficiency	100.00%
Sources Flux	568.06 lm	Maximum value	5087.25 cd	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	37 mm	Width	130 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	130 mm	Height	0 mm
Horizontal Luminous Area		0.004810 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001164 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-04-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		568.06 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5201-FE-S	LED 7W 568LM 2700K IRC>90 SDMC<3 NICH	568.06	7.10	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		

37mm x 130mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

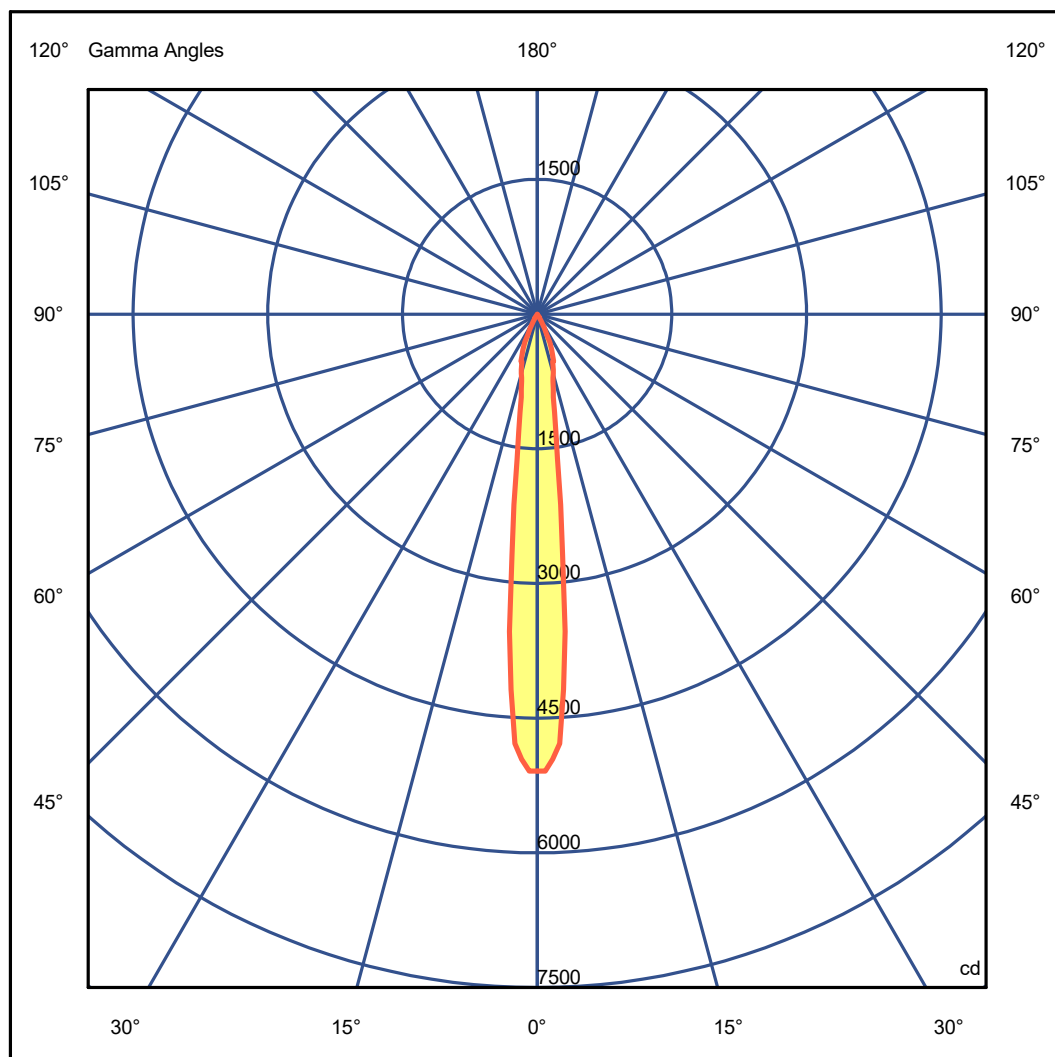

Luminaire

Code 5201-FE-S
Name Dolt Pontual Dali 7W 568LM 2700K 10°

Measurem.

Code 101/2020
Name Dolt Pontual Dali 7W 568LM 2700K 10°

Luminaire Flux	568.06 lm	Luminaire Power	7.10 W	Efficacy	80.01 lm/W	Efficiency	100.00%
Sources Flux	568.06 lm	Maximum value	5087.25 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C 0.00		C 0.00
G 0.0	5087.25	G 46.0	0.00
G 1.0	5087.25	G 47.0	0.00
G 2.0	4959.00	G 48.0	0.00
G 3.0	4788.00	G 49.0	0.00
G 4.0	4189.50	G 50.0	0.00
G 5.0	3548.25	G 51.0	0.00
G 6.0	2693.25	G 52.0	0.00
G 7.0	2137.50	G 53.0	0.00
G 8.0	1624.50	G 54.0	0.00
G 9.0	1325.25	G 55.0	0.00
G 10.0	1111.50	G 56.0	0.00
G 11.0	940.50	G 57.0	0.00
G 12.0	855.00	G 58.0	0.00
G 13.0	769.50	G 59.0	0.00
G 14.0	726.75	G 60.0	0.00
G 15.0	684.00	G 61.0	0.00
G 16.0	641.25	G 62.0	0.00
G 17.0	598.50	G 63.0	0.00
G 18.0	555.75	G 64.0	0.00
G 19.0	555.75	G 65.0	0.00
G 20.0	513.00	G 66.0	0.00
G 21.0	470.25	G 67.0	0.00
G 22.0	427.50	G 68.0	0.00
G 23.0	384.75	G 69.0	0.00
G 24.0	342.00	G 70.0	0.00
G 25.0	256.50	G 71.0	0.00
G 26.0	213.75	G 72.0	0.00
G 27.0	171.00	G 73.0	0.00
G 28.0	128.25	G 74.0	0.00
G 29.0	85.50	G 75.0	0.00
G 30.0	42.75	G 76.0	0.00
G 31.0	42.75	G 77.0	0.00
G 32.0	42.75	G 78.0	0.00
G 33.0	42.75	G 79.0	0.00
G 34.0	42.75	G 80.0	0.00
G 35.0	0.00	G 81.0	0.00
G 36.0	0.00	G 82.0	0.00
G 37.0	0.00	G 83.0	0.00
G 38.0	0.00	G 84.0	0.00
G 39.0	0.00	G 85.0	0.00
G 40.0	0.00	G 86.0	0.00
G 41.0	0.00	G 87.0	0.00
G 42.0	0.00	G 88.0	0.00
G 43.0	0.00	G 89.0	0.00
G 44.0	0.00	G 90.0	0.00
G 45.0	0.00		