

**Luminaire**

Code 5201-MA-N  
 Name Dolt Pontual Dali 7W 600LM 4000K 48°

**Measurement**


Code 54/2020  
 Name Dolt Pontual Dali 7W 600LM 4000K 48°

Luminaire Flux	600.65 lm	Luminaire Power	3.10 W	Efficacy	193.76 lm/W	Efficiency	100.00%
Sources Flux	600.65 lm	Maximum value	1208.58 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	130 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	130 mm	Height	0 mm	
Horizontal Luminous Area	0.004810 m2		Emitting area on Plane 180°	0.000000 m2			
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2			
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.001164 m2			
Coordinate system	CG		Symmetry Type	Rotosymmetrical			
Date	03-02-2020		Maximum Gamma Angle	90			
Measurement Distance	0.00		Measurement Flux	600.65 lm			
Operator			Rated Voltage				
Temperature	25.00 °C		Rated Current				
Humidity	60.00 %		Photocell				
Notes							

**Luminaire Sources**

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5201-MA-N	LED 7W 600LM 4000K IRC>90 SDMC<3 NIC	600.65	3.10	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		


37mm x 130mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

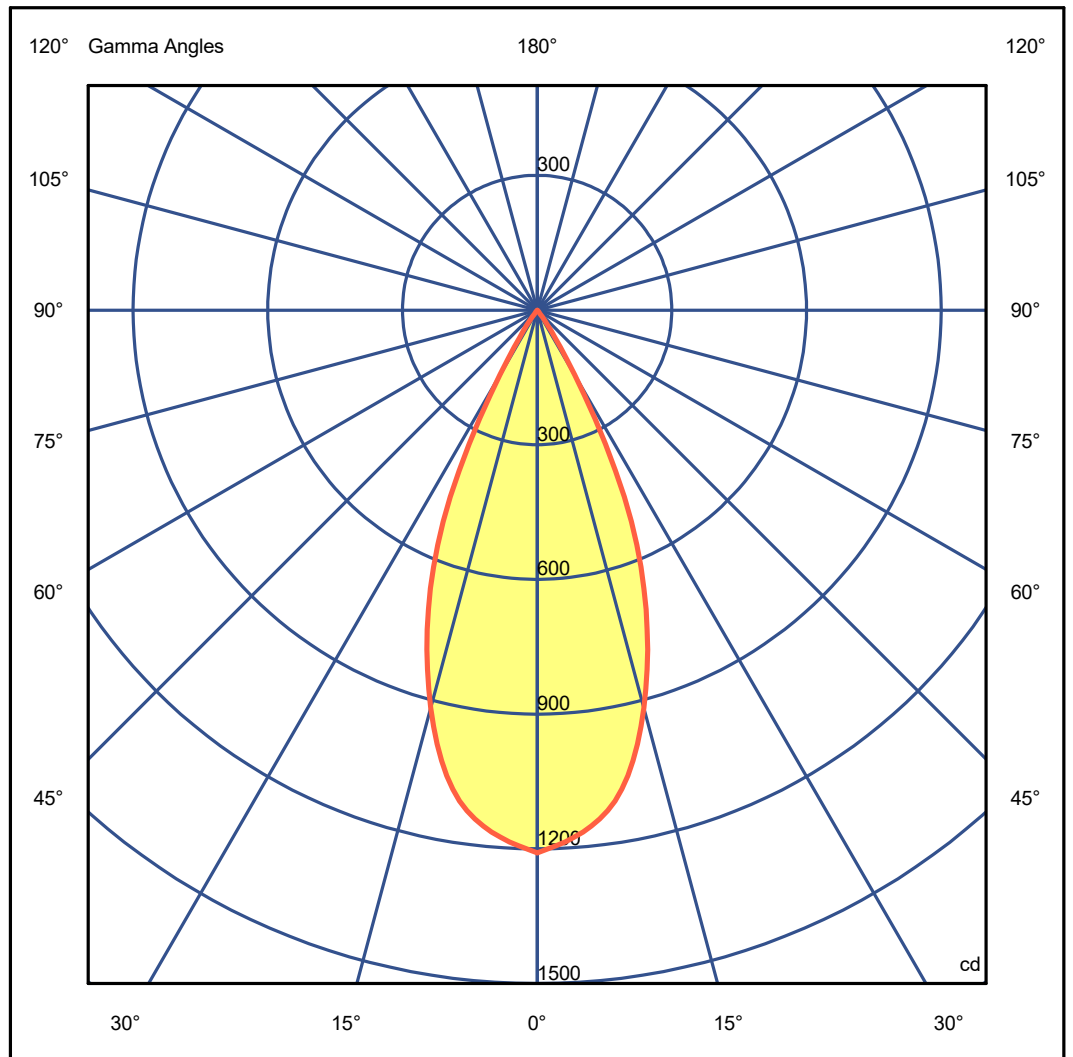

**Luminaire**

Code 5201-MA-N  
 Name Dolt Pontual Dali 7W 600LM 4000K 48°

**Measurem.**

Code 54/2020  
 Name Dolt Pontual Dali 7W 600LM 4000K 48°

Luminaire Flux	600.65 lm	Luminaire Power	3.10 W	Efficacy	193.76 lm/W	Efficiency	100.00%
Sources Flux	600.65 lm	Maximum value	1208.58 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

**Luminous Intensity Table cd Table 1/1**

C 0.00

G 0.0	1208.58
G 5.0	1166.90
G 10.0	1083.55
G 15.0	916.85
G 20.0	708.48
G 25.0	458.43
G 30.0	166.70
G 35.0	41.68
G 40.0	0.00
G 45.0	0.00
G 50.0	0.00
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00