

Luminaire

Code 5202-AB-N
Name Dolt Pontual Dali 6W 480LM 4000K 36°

Measurement


Code 106/2020
Name Dolt Pontual Dali 6W 480LM 4000K 36°

Luminaire Flux	480.01 lm	Luminaire Power	6.30 W	Efficacy	76.19 lm/W	Efficiency	100.00%
Sources Flux	480.01 lm	Maximum value	1223.06 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	215 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	215 mm	Height	0 mm	
Horizontal Luminous Area	0.007955 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001924 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Maximum Gamma Angle	90	Measurement Flux	480.01 lm
Date	17-04-2020	Rated Voltage		Rated Current		Photocell	
Measurement Distance	0.00	Operator		Temperature	25.00 °C	Humidity	60.00 %
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5202-AB-N	LED 6W 480LM 4000K IRC>90 SDMC<3 NICHIA	480.01	6.30	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		

37mm x 215mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

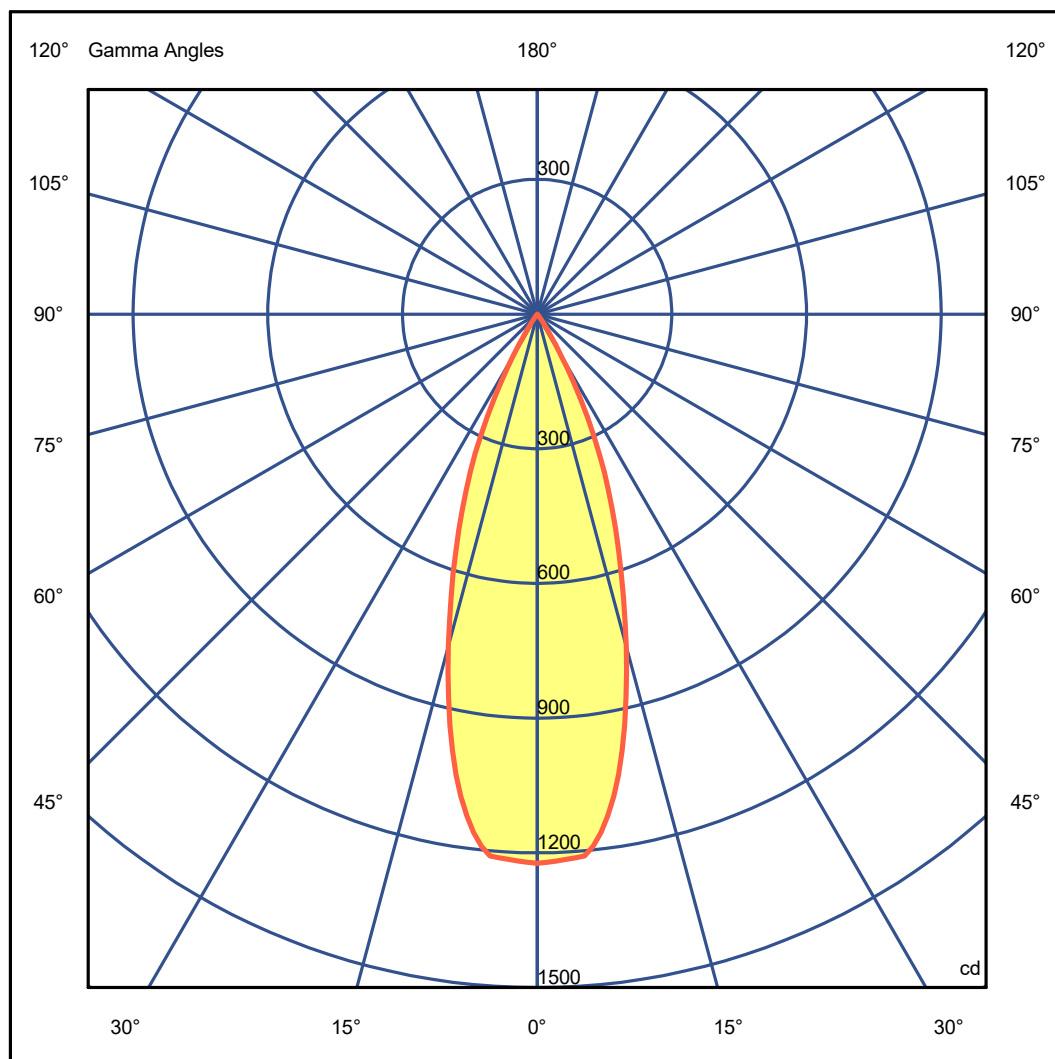

Luminaire

Code 5202-AB-N
Name Dolt Pontual Dali 6W 480LM 4000K 36°

Measurem.

Code 106/2020
Name Dolt Pontual Dali 6W 480LM 4000K 36°

Luminaire Flux	480.01 lm	Luminaire Power	6.30 W	Efficacy	76.19 lm/W	Efficiency	100.00%
Sources Flux	480.01 lm	Maximum value	1223.06 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
G 0.0		1223.06
G 5.0		1211.25
G 10.0		1041.25
G 15.0		765.00
G 20.0		510.00
G 25.0		297.50
G 30.0		106.25
G 35.0		21.25
G 40.0		0.00
G 45.0		0.00
G 50.0		0.00
G 55.0		0.00
G 60.0		0.00
G 65.0		0.00
G 70.0		0.00
G 75.0		0.00
G 80.0		0.00
G 85.0		0.00
G 90.0		0.00