

Luminaire

Code 5202-AB-S
Name Dolt Pontual Dali 6W 460LM 2700K 36°

Measurem.


Code 107/2020
Name Dolt Pontual Dali 6W 460LM 2700K 36°

Luminaire Flux	460.86 lm	Luminaire Power	6.30 W	Efficacy	73.15 lm/W	Efficiency	100.00%
Sources Flux	460.86 lm	Maximum value	1471.20 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	37 mm	Width	215 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	215 mm	Height	0 mm
Horizontal Luminous Area		0.007955 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001924 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-04-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		460.86 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5202-AB-S	LED 6W 460LM 2700K IRC>90 SDMC<3 NICHIA	460.86	6.30	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		

37mm x 215mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

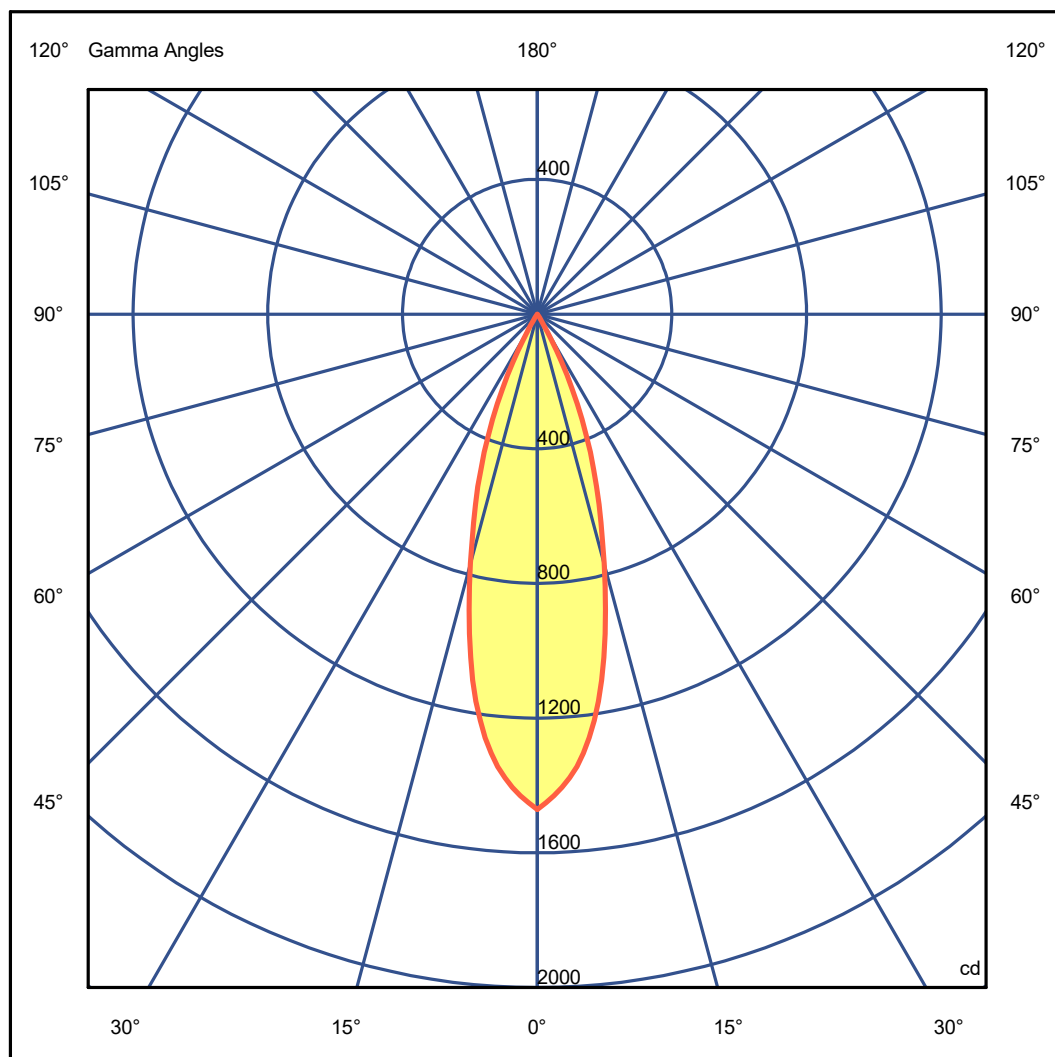

Luminaire

Code 5202-AB-S
Name Dolt Pontual Dali 6W 460LM 2700K 36°

Measurem.

Code 107/2020
Name Dolt Pontual Dali 6W 460LM 2700K 36°

Luminaire Flux	460.86 lm	Luminaire Power	6.30 W	Efficacy	73.15 lm/W	Efficiency	100.00%
Sources Flux	460.86 lm	Maximum value	1471.20 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
G 0.0		1471.20
G 5.0		1348.60
G 10.0		1103.40
G 15.0		766.25
G 20.0		490.40
G 25.0		245.20
G 30.0		61.30
G 35.0		0.00
G 40.0		0.00
G 45.0		0.00
G 50.0		0.00
G 55.0		0.00
G 60.0		0.00
G 65.0		0.00
G 70.0		0.00
G 75.0		0.00
G 80.0		0.00
G 85.0		0.00
G 90.0		0.00