

Luminaire

Code 5202-FE-N
 Name Dolt Pontual Dali 6W 480LM 4000K 10°

Measurement


Code 104/2020
 Name Dolt Pontual Dali 6W 480LM 4000K 10°

Luminaire Flux	480.69 lm	Luminaire Power	6.30 W	Efficacy	76.30 lm/W	Efficiency	100.00%
Sources Flux	480.69 lm	Maximum value	4304.82 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	37 mm	Width	215 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	215 mm	Height	0 mm
Horizontal Luminous Area		0.007955 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001924 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-02-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		480.69 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5202-FE-N	LED 6W 480LM 4000K IRC>90 SDMC<3 NICH	480.69	6.30	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		

37mm x 215mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

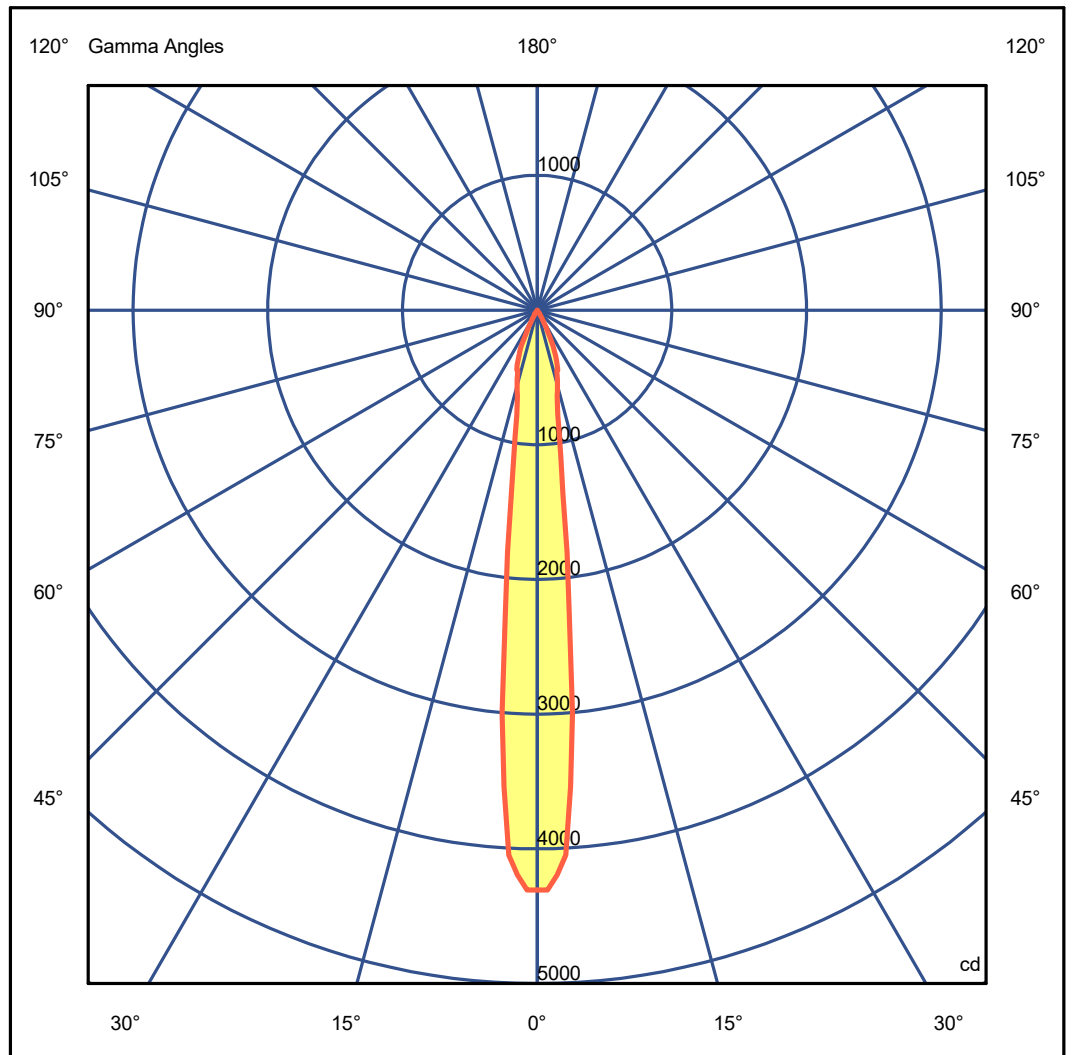

Luminaire

Code 5202-FE-N
 Name Dolt Pontual Dali 6W 480LM 4000K 10°

Measurem.

Code 104/2020
 Name Dolt Pontual Dali 6W 480LM 4000K 10°

Luminaire Flux	480.69 lm	Luminaire Power	6.30 W	Efficacy	76.30 lm/W	Efficiency	100.00%
Sources Flux	480.69 lm	Maximum value	4304.82 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C 0.00	C 0.00
G 0.0	4304.82	G 46.0 0.00
G 1.0	4304.82	G 47.0 0.00
G 2.0	4196.30	G 48.0 0.00
G 3.0	4051.60	G 49.0 0.00
G 4.0	3545.15	G 50.0 0.00
G 5.0	3002.53	G 51.0 0.00
G 6.0	2279.03	G 52.0 0.00
G 7.0	1808.75	G 53.0 0.00
G 8.0	1374.65	G 54.0 0.00
G 9.0	1121.42	G 55.0 0.00
G 10.0	940.55	G 56.0 0.00
G 11.0	795.85	G 57.0 0.00
G 12.0	723.50	G 58.0 0.00
G 13.0	651.15	G 59.0 0.00
G 14.0	614.98	G 60.0 0.00
G 15.0	578.80	G 61.0 0.00
G 16.0	542.63	G 62.0 0.00
G 17.0	506.45	G 63.0 0.00
G 18.0	470.28	G 64.0 0.00
G 19.0	470.28	G 65.0 0.00
G 20.0	434.10	G 66.0 0.00
G 21.0	397.93	G 67.0 0.00
G 22.0	361.75	G 68.0 0.00
G 23.0	325.57	G 69.0 0.00
G 24.0	289.40	G 70.0 0.00
G 25.0	217.05	G 71.0 0.00
G 26.0	180.88	G 72.0 0.00
G 27.0	144.70	G 73.0 0.00
G 28.0	108.53	G 74.0 0.00
G 29.0	72.35	G 75.0 0.00
G 30.0	36.18	G 76.0 0.00
G 31.0	36.18	G 77.0 0.00
G 32.0	36.18	G 78.0 0.00
G 33.0	36.18	G 79.0 0.00
G 34.0	36.18	G 80.0 0.00
G 35.0	0.00	G 81.0 0.00
G 36.0	0.00	G 82.0 0.00
G 37.0	0.00	G 83.0 0.00
G 38.0	0.00	G 84.0 0.00
G 39.0	0.00	G 85.0 0.00
G 40.0	0.00	G 86.0 0.00
G 41.0	0.00	G 87.0 0.00
G 42.0	0.00	G 88.0 0.00
G 43.0	0.00	G 89.0 0.00
G 44.0	0.00	G 90.0 0.00
G 45.0	0.00	