

**Luminaire**

Code 5202-MA-S  
 Name Dolt Pontual Dali 6W 460LM 2700K 48°

**Measurement**


Code 55/2020  
 Name Dolt Pontual Dali 6W 460LM 2700K 48°

Luminaire Flux	460.13 lm	Luminaire Power	6.10 W	Efficacy	75.43 lm/W	Efficiency	100.00%
Sources Flux	460.13 lm	Maximum value	925.82 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	215 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	215 mm	Height	0 mm	
Horizontal Luminous Area	0.007955 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001924 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	03-02-2020	Maximum Gamma Angle	90
Measurement Distance	0.00	Measurement Flux	460.13 lm	Operator		Rated Voltage	
Temperature	25.00 °C	Rated Current		Humidity	60.00 %	Photocell	
Notes							

**Luminaire Sources**

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5202-MA-S	LED 6W 460LM 2700K IRC>90 SDMC<3 NICH	460.13	6.10	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		


37mm x 215mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

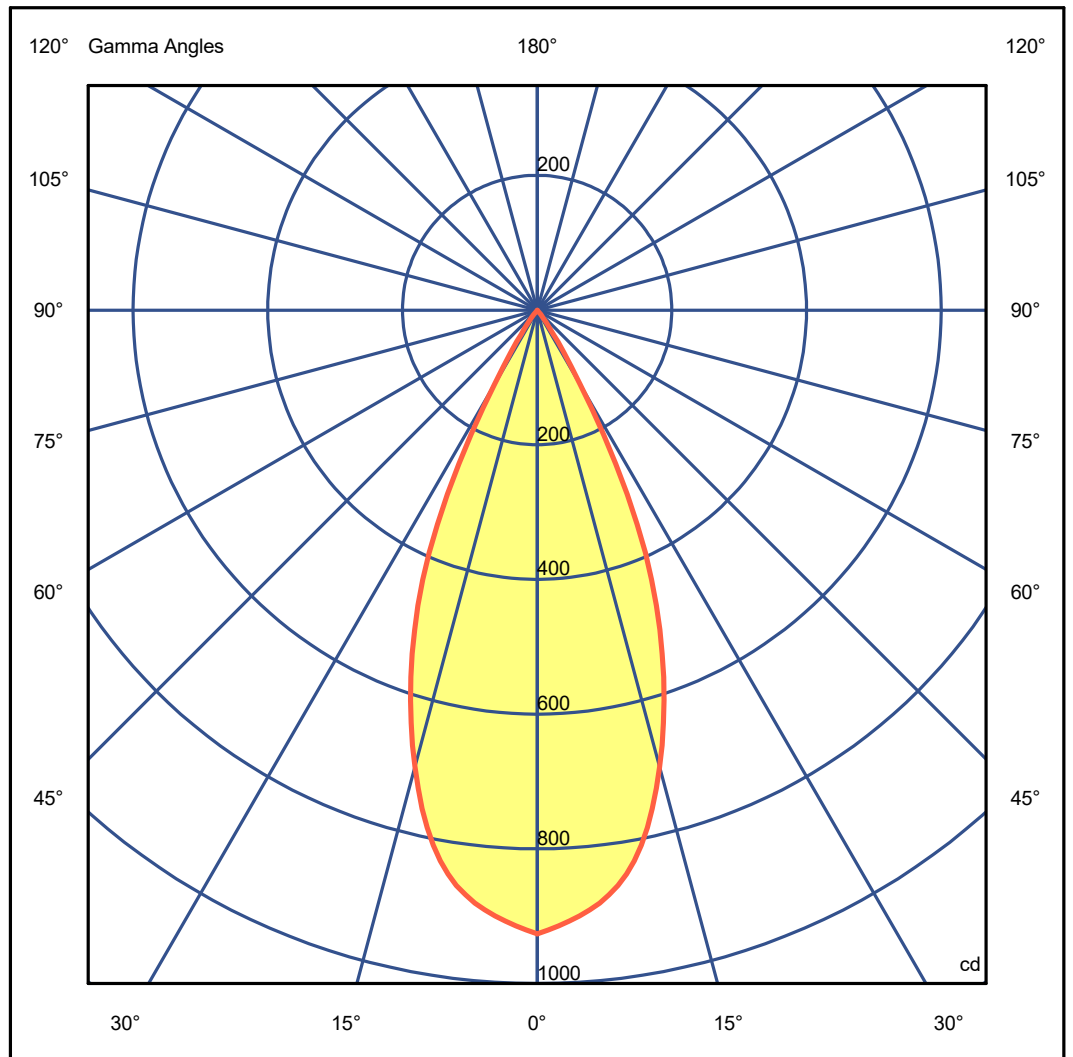

**Luminaire**

Code 5202-MA-S  
 Name Dolt Pontual Dali 6W 460LM 2700K 48°

**Measurem.**

Code 55/2020  
 Name Dolt Pontual Dali 6W 460LM 2700K 48°

Luminaire Flux	460.13 lm	Luminaire Power	6.10 W	Efficacy	75.43 lm/W	Efficiency	100.00%
Sources Flux	460.13 lm	Maximum value	925.82 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

**Luminous Intensity Table cd Table 1/1**

C 0.00

G 0.0	925.82
G 5.0	893.90
G 10.0	830.05
G 15.0	702.35
G 20.0	542.72
G 25.0	351.17
G 30.0	127.70
G 35.0	31.92
G 40.0	0.00
G 45.0	0.00
G 50.0	0.00
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00