

**Luminaire**

Code 5203-FE-N  
 Name Dolt Pontual Dali 14W 1200LM 4000K 10°


**Measurment.**

Code 108/2020  
 Name Dolt Pontual Dali 14W 1200LM 4000K 10°

Luminaire Flux	1200.23 lm	Luminaire Power	14.30 W	Efficacy	83.93 lm/W	Efficiency	100.00%
Sources Flux	1200.23 lm	Maximum value	10748.67 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	215 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	215 mm	Height	0 mm	
Horizontal Luminous Area	0.007955 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001924 m2
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 90°	0.000000 m2	Glare area at 76°			
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	17-04-2020	Maximum Gamma Angle	90				
Measurement Distance	0.00	Measurement Flux	1200.23 lm				
Operator		Rated Voltage					
Temperature	25.00 °C	Rated Current					
Humidity	60.00 %	Photocell					
Notes							

**Luminaire Sources**

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5203-FE-N	LED 14W 1200LM 4000K IRC>90 SDMC<3 NIC	1200.23	14.30	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		

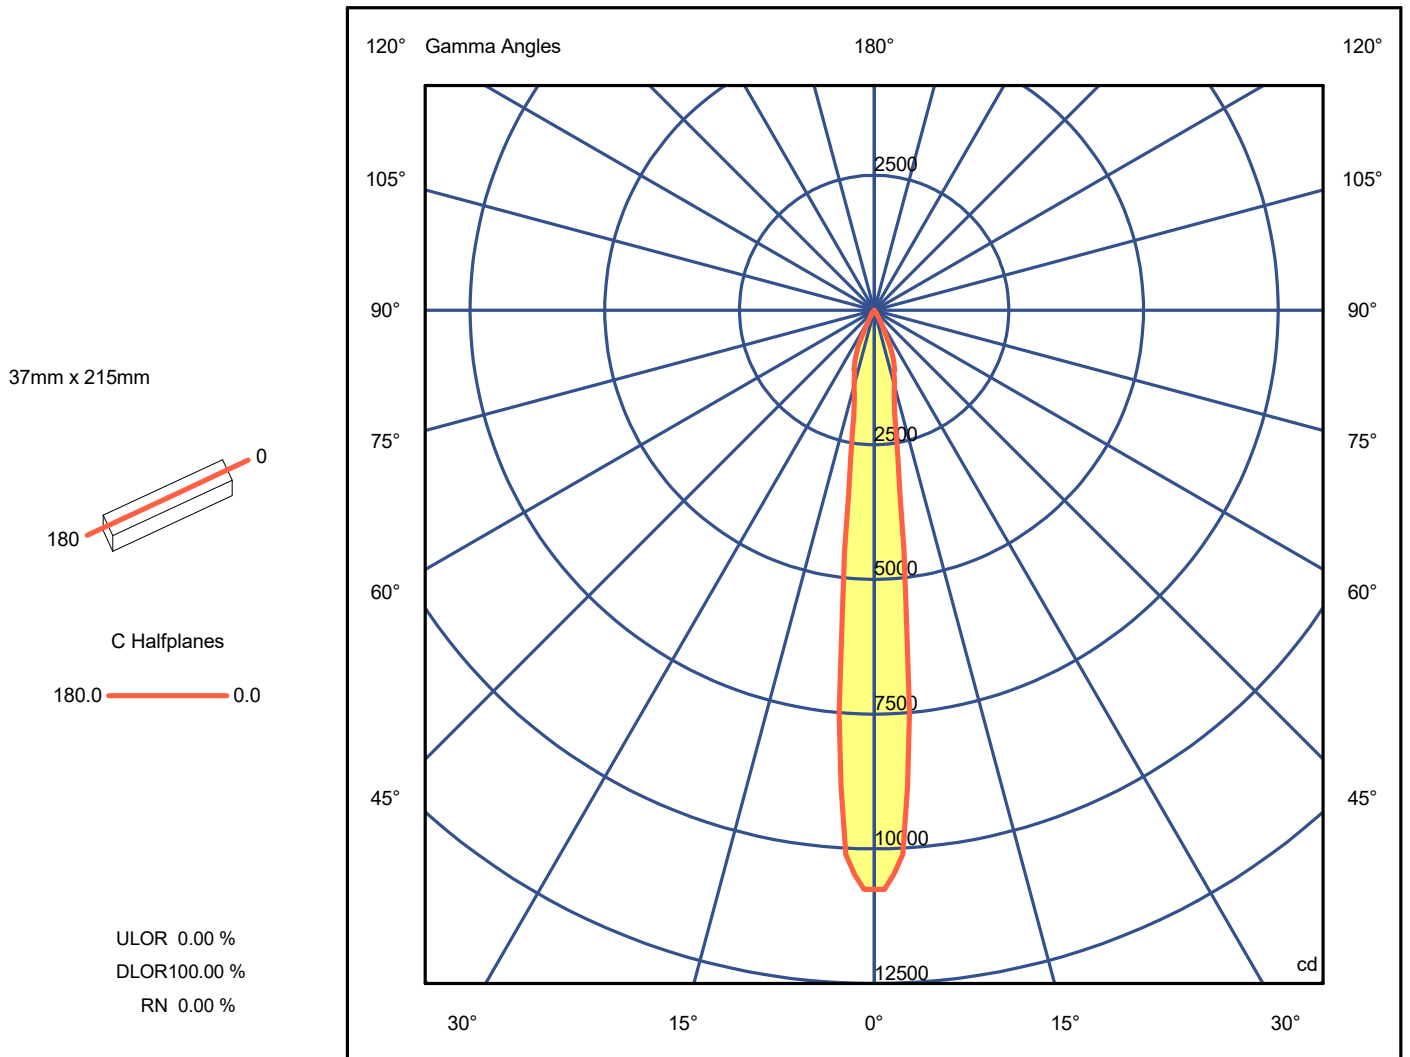

**Luminaire**

Code 5203-FE-N  
 Name Dolt Pontual Dali 14W 1200LM 4000K 10°

**Measurem.**

Code 108/2020  
 Name Dolt Pontual Dali 14W 1200LM 4000K 10°

Luminaire Flux	1200.23 lm	Luminaire Power	14.30 W	Efficacy	83.93 lm/W	Efficiency	100.00%
Sources Flux	1200.23 lm	Maximum value	10748.67 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

**Luminous Intensity Table cd Table 1/1**

	C 0.00	C 0.00
G 0.0	10748.67	G 46.0 0.00
G 1.0	10748.67	G 47.0 0.00
G 2.0	10477.70	G 48.0 0.00
G 3.0	10116.40	G 49.0 0.00
G 4.0	8851.85	G 50.0 0.00
G 5.0	7496.98	G 51.0 0.00
G 6.0	5690.48	G 52.0 0.00
G 7.0	4516.25	G 53.0 0.00
G 8.0	3432.35	G 54.0 0.00
G 9.0	2800.07	G 55.0 0.00
G 10.0	2348.45	G 56.0 0.00
G 11.0	1987.15	G 57.0 0.00
G 12.0	1806.50	G 58.0 0.00
G 13.0	1625.85	G 59.0 0.00
G 14.0	1535.53	G 60.0 0.00
G 15.0	1445.20	G 61.0 0.00
G 16.0	1354.88	G 62.0 0.00
G 17.0	1264.55	G 63.0 0.00
G 18.0	1174.22	G 64.0 0.00
G 19.0	1174.22	G 65.0 0.00
G 20.0	1083.90	G 66.0 0.00
G 21.0	993.58	G 67.0 0.00
G 22.0	903.25	G 68.0 0.00
G 23.0	812.92	G 69.0 0.00
G 24.0	722.60	G 70.0 0.00
G 25.0	541.95	G 71.0 0.00
G 26.0	451.63	G 72.0 0.00
G 27.0	361.30	G 73.0 0.00
G 28.0	270.98	G 74.0 0.00
G 29.0	180.65	G 75.0 0.00
G 30.0	90.33	G 76.0 0.00
G 31.0	90.33	G 77.0 0.00
G 32.0	90.33	G 78.0 0.00
G 33.0	90.33	G 79.0 0.00
G 34.0	90.33	G 80.0 0.00
G 35.0	0.00	G 81.0 0.00
G 36.0	0.00	G 82.0 0.00
G 37.0	0.00	G 83.0 0.00
G 38.0	0.00	G 84.0 0.00
G 39.0	0.00	G 85.0 0.00
G 40.0	0.00	G 86.0 0.00
G 41.0	0.00	G 87.0 0.00
G 42.0	0.00	G 88.0 0.00
G 43.0	0.00	G 89.0 0.00
G 44.0	0.00	G 90.0 0.00
G 45.0	0.00	