

Luminaire

Code 5203-FE-S
Name Dolt Pontual Dali 14W 1140LM 2700K 10°

Measurem.


Code 109/2020
Name Dolt Pontual Dali 14W 1140LM 2700K 10°

Luminaire Flux	1140.77 lm	Luminaire Power	14.30 W	Efficacy	79.77 lm/W	Efficiency	100.00%
Sources Flux	1140.77 lm	Maximum value	10216.15 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	215 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	215 mm	Height	0 mm	
Horizontal Luminous Area	0.007955 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001924 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Maximum Gamma Angle	90	Measurement Flux	1140.77 lm
Date	17-04-2020	Rated Voltage		Rated Current		Photocell	
Measurement Distance	0.00	Operator		Temperature	25.00 °C	Humidity	60.00 %
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5203-FE-S	LED 14W 1140LM 2700K IRC>90 SDMC<3 NICHIA	1140.77	14.30	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		


37mm x 215mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

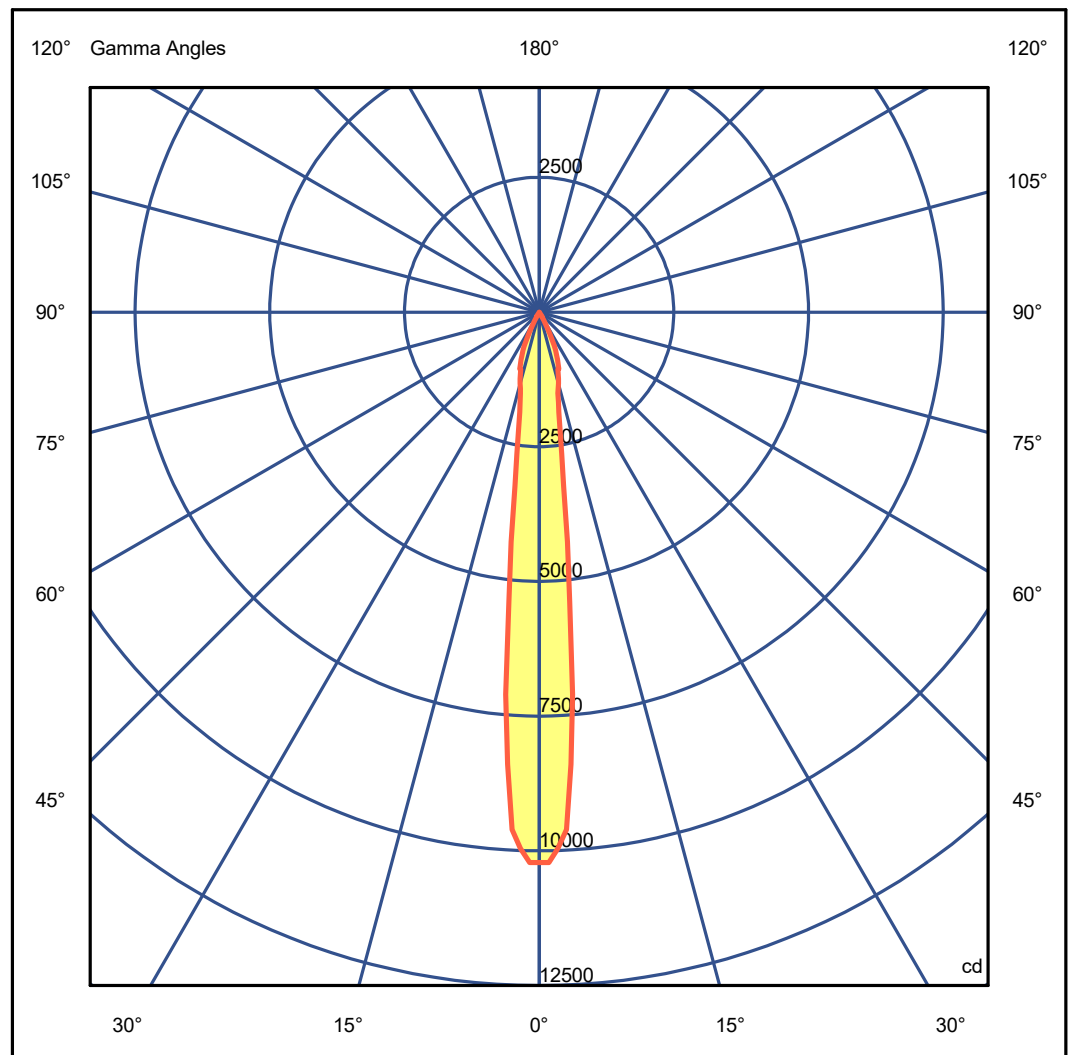

Luminaire

Code 5203-FE-S
Name Dolt Pontual Dali 14W 1140LM 2700K 10°

Measurem.

Code 109/2020
Name Dolt Pontual Dali 14W 1140LM 2700K 10°

Luminaire Flux	1140.77 lm	Luminaire Power	14.30 W	Efficacy	79.77 lm/W	Efficiency	100.00%
Sources Flux	1140.77 lm	Maximum value	10216.15 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00		C 0.00	
G 0.0	10216.15	G 46.0	0.00
G 1.0	10216.15	G 47.0	0.00
G 2.0	9958.60	G 48.0	0.00
G 3.0	9615.20	G 49.0	0.00
G 4.0	8413.30	G 50.0	0.00
G 5.0	7125.55	G 51.0	0.00
G 6.0	5408.55	G 52.0	0.00
G 7.0	4292.50	G 53.0	0.00
G 8.0	3262.30	G 54.0	0.00
G 9.0	2661.35	G 55.0	0.00
G 10.0	2232.10	G 56.0	0.00
G 11.0	1888.70	G 57.0	0.00
G 12.0	1717.00	G 58.0	0.00
G 13.0	1545.30	G 59.0	0.00
G 14.0	1459.45	G 60.0	0.00
G 15.0	1373.60	G 61.0	0.00
G 16.0	1287.75	G 62.0	0.00
G 17.0	1201.90	G 63.0	0.00
G 18.0	1116.05	G 64.0	0.00
G 19.0	1116.05	G 65.0	0.00
G 20.0	1030.20	G 66.0	0.00
G 21.0	944.35	G 67.0	0.00
G 22.0	858.50	G 68.0	0.00
G 23.0	772.65	G 69.0	0.00
G 24.0	686.80	G 70.0	0.00
G 25.0	515.10	G 71.0	0.00
G 26.0	429.25	G 72.0	0.00
G 27.0	343.40	G 73.0	0.00
G 28.0	257.55	G 74.0	0.00
G 29.0	171.70	G 75.0	0.00
G 30.0	85.85	G 76.0	0.00
G 31.0	85.85	G 77.0	0.00
G 32.0	85.85	G 78.0	0.00
G 33.0	85.85	G 79.0	0.00
G 34.0	85.85	G 80.0	0.00
G 35.0	0.00	G 81.0	0.00
G 36.0	0.00	G 82.0	0.00
G 37.0	0.00	G 83.0	0.00
G 38.0	0.00	G 84.0	0.00
G 39.0	0.00	G 85.0	0.00
G 40.0	0.00	G 86.0	0.00
G 41.0	0.00	G 87.0	0.00
G 42.0	0.00	G 88.0	0.00
G 43.0	0.00	G 89.0	0.00
G 44.0	0.00	G 90.0	0.00
G 45.0	0.00		