

Luminaire

Code 5203-MA-N
Name Dolt Pontual Dali 14W 1200LM 4000K 48°

Measurem.


Code 58/2020
Name Dolt Pontual Dali 14W 1200LM 4000K 48°

Luminaire Flux	1200.94 lm	Luminaire Power	14.20 W	Efficacy	84.57 lm/W	Efficiency	100.00%
Sources Flux	1200.94 lm	Maximum value	2416.43 cd	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	37 mm	Width	215 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	215 mm	Height	0 mm
Horizontal Luminous Area		0.007955 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001924 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-03-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1200.94 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5203-MA-N	LED 14W 1200LM 4000K IRC>90 SDMC<3 NICHIA	1200.94	14.20	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		

37mm x 215mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

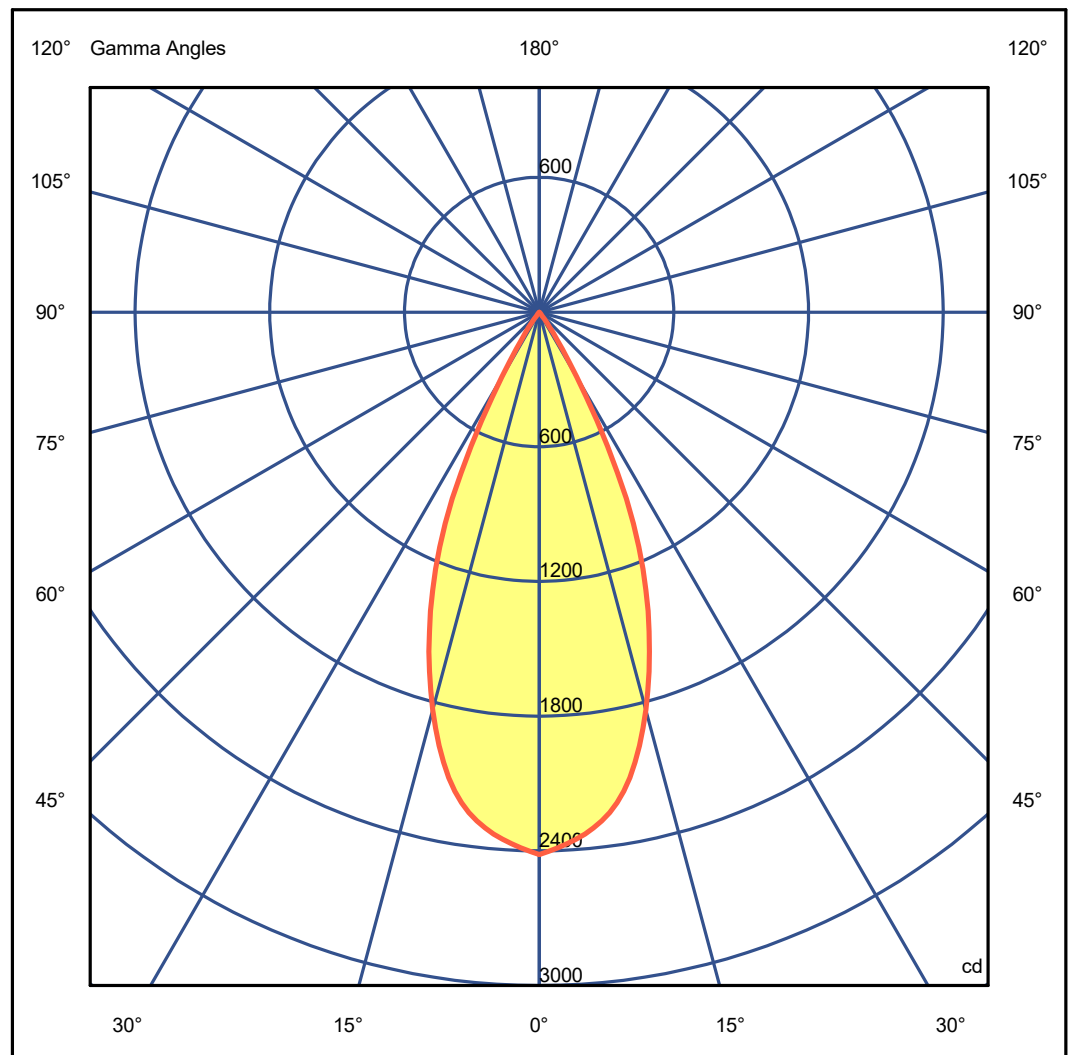

Luminaire

Code 5203-MA-N
Name Dolt Pontual Dali 14W 1200LM 4000K 48°

Measurem.

Code 58/2020
Name Dolt Pontual Dali 14W 1200LM 4000K 48°

Luminaire Flux	1200.94 lm	Luminaire Power	14.20 W	Efficacy	84.57 lm/W	Efficiency	100.00%
Sources Flux	1200.94 lm	Maximum value	2416.43 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00	
G 0.0	2416.43
G 5.0	2333.10
G 10.0	2166.45
G 15.0	1833.15
G 20.0	1416.53
G 25.0	916.58
G 30.0	333.30
G 35.0	83.33
G 40.0	0.00
G 45.0	0.00
G 50.0	0.00
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00