

**Luminaire**

Code 5203-MA-S  
 Name Dolt Pontual Dali 14W 1140LM 2700K 48°


**Measurum.**

Code 57/2020  
 Name Dolt Pontual Dali 14W 1140LM 2700K 48°

Luminaire Flux	1140.77 lm	Luminaire Power	14.10 W	Efficacy	80.91 lm/W	Efficiency	100.00%
Sources Flux	1140.77 lm	Maximum value	2295.35 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	215 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	215 mm	Height	0 mm	
Horizontal Luminous Area	0.007955 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001924 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	03-03-2020	Maximum Gamma Angle	90
Measurement Distance	0.00	Measurement Flux	1140.77 lm	Operator		Rated Voltage	
Temperature	25.00 °C	Rated Current		Humidity	60.00 %	Photocell	
Notes							

**Luminaire Sources**

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5203-MA-S	LED 14W 1140LM 2700K IRC>90 SDMC<3 NICH077	1140.77	14.10	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		

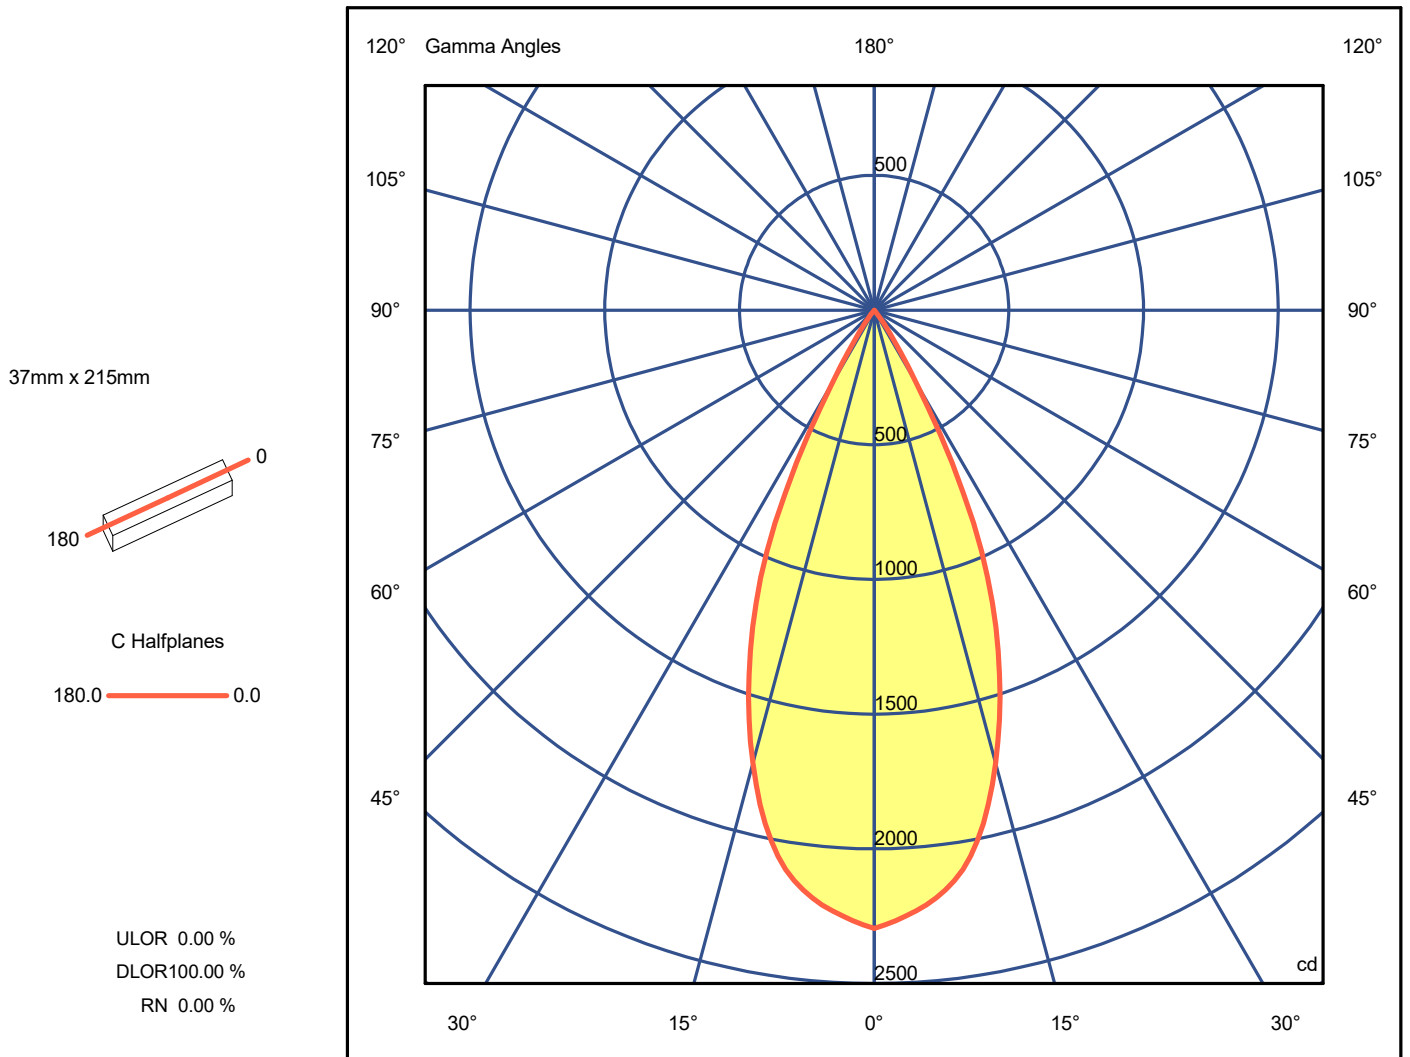

**Luminaire**

Code 5203-MA-S  
 Name Dolt Pontual Dali 14W 1140LM 2700K 48°

**Measurem.**

Code 57/2020  
 Name Dolt Pontual Dali 14W 1140LM 2700K 48°

Luminaire Flux	1140.77 lm	Luminaire Power	14.10 W	Efficacy	80.91 lm/W	Efficiency	100.00%
Sources Flux	1140.77 lm	Maximum value	2295.35 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

**Luminous Intensity Table cd Table 1/1**

C	0.00
G 0.0	2295.35
G 5.0	2216.20
G 10.0	2057.90
G 15.0	1741.30
G 20.0	1345.55
G 25.0	870.65
G 30.0	316.60
G 35.0	79.15
G 40.0	0.00
G 45.0	0.00
G 50.0	0.00
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00