

Luminaire

Code 5210-N
 Name Dolt Difusa Dali 5W 410LM 4000K 120°

Measurment.


Code 73/2020
 Name Dolt Difusa Dali 5W 410LM 4000K 120°

Luminaire Flux	410.13 lm	Luminaire Power	5.20 W	Efficacy	78.87 lm/W	Efficiency	100.00%
Sources Flux	410.13 lm	Maximum value	171.07 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	283 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	283 mm	Height	0 mm	
Horizontal Luminous Area	0.010471 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.002533 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	06-03-2020	Maximum Gamma Angle	90
Measurement Distance	0.00	Measurement Flux	410.13 lm	Operator		Rated Voltage	
Temperature	25.00 °C	Rated Current		Humidity	60.00 %	Photocell	
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5210-N	LED 5W 410LM 4000K IRC>90 SDMC<3 ARROW13	410.13	5.20	1
C.I.E.	53 84 98 100 100	D DIN 5040	A40		
F UTE	1.00 D	B NBN	BZ 4		


37mm x 283mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

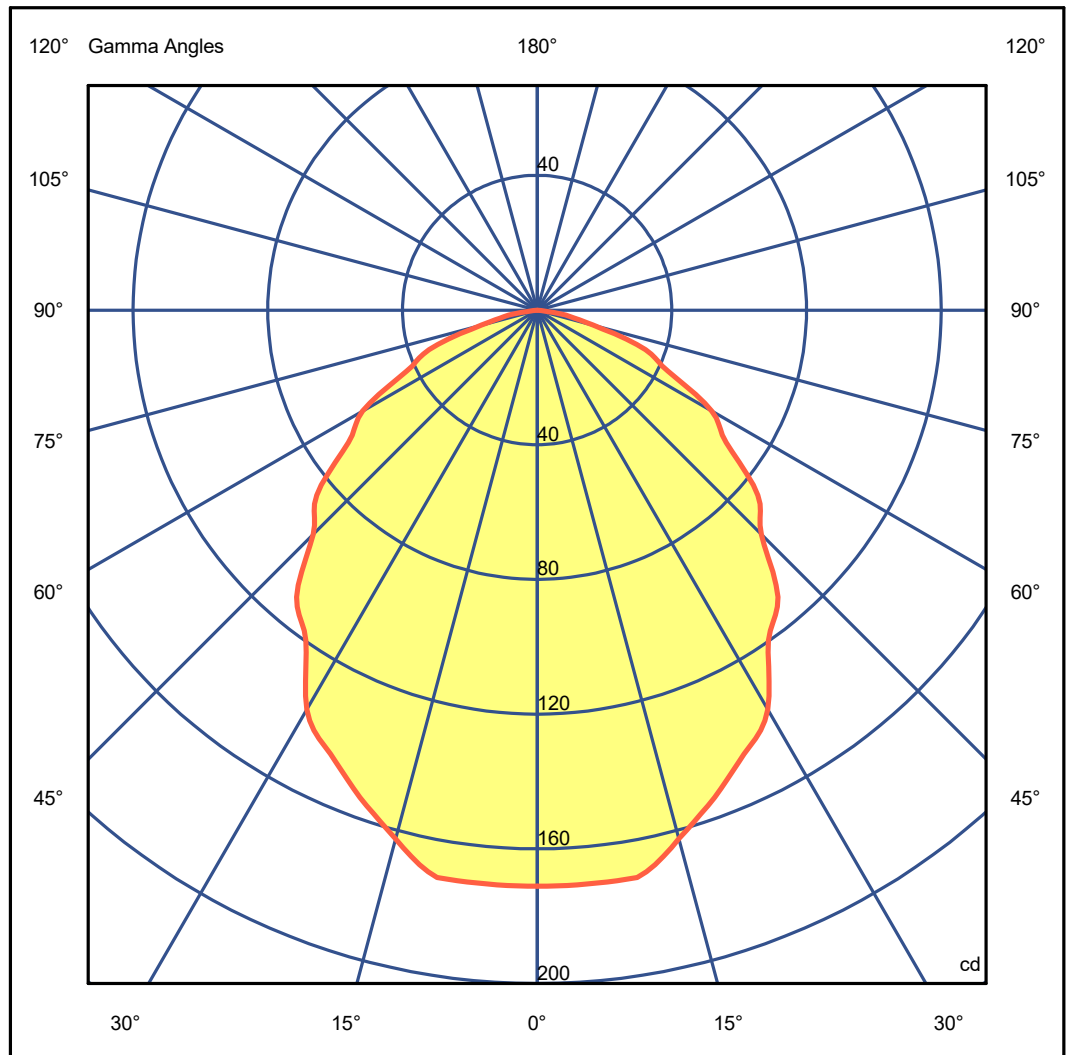

Luminaire

Code 5210-N
 Name Dolt Difusa Dali 5W 410LM 4000K 120°

Measurem.

Code 73/2020
 Name Dolt Difusa Dali 5W 410LM 4000K 120°

Luminaire Flux	410.13 lm	Luminaire Power	5.20 W	Efficacy	78.87 lm/W	Efficiency	100.00%
Sources Flux	410.13 lm	Maximum value	171.07 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00	
G 0.0	171.07
G 5.0	171.07
G 10.0	171.07
G 15.0	162.52
G 20.0	153.96
G 25.0	145.41
G 30.0	136.86
G 35.0	119.75
G 40.0	111.20
G 45.0	94.09
G 50.0	85.54
G 55.0	68.43
G 60.0	59.88
G 65.0	42.77
G 70.0	34.21
G 75.0	17.11
G 80.0	8.55
G 85.0	0.00
G 90.0	0.00