

Luminaire

Code 5211-N
Name Dolt Difusa Dali 11W 740LM 4000K 120°

Measurem.


Code 78/2020
Name Dolt Difusa Dali 11W 740LM 4000K 120°

Luminaire Flux	740.05 lm	Luminaire Power	11.20 W	Efficacy	66.08 lm/W	Efficiency	100.00%
Sources Flux	740.05 lm	Maximum value	316.80 cd	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	37 mm	Width	564 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	564 mm	Height	0 mm
Horizontal Luminous Area		0.020868 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005048 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-03-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		740.05 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line		Code	Name	Flux [lm]	Pow. [W]	Q.ty
		5211-N	LED 11W 740LM 4000K IRC>90 SDMC<3 ARROW5	740.05	11.20	1
C.I.E.	53 84 98 100 100		D DIN 5040	A40		
F UTE	1.00 D		B NBN	BZ 4		

37mm x 564mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

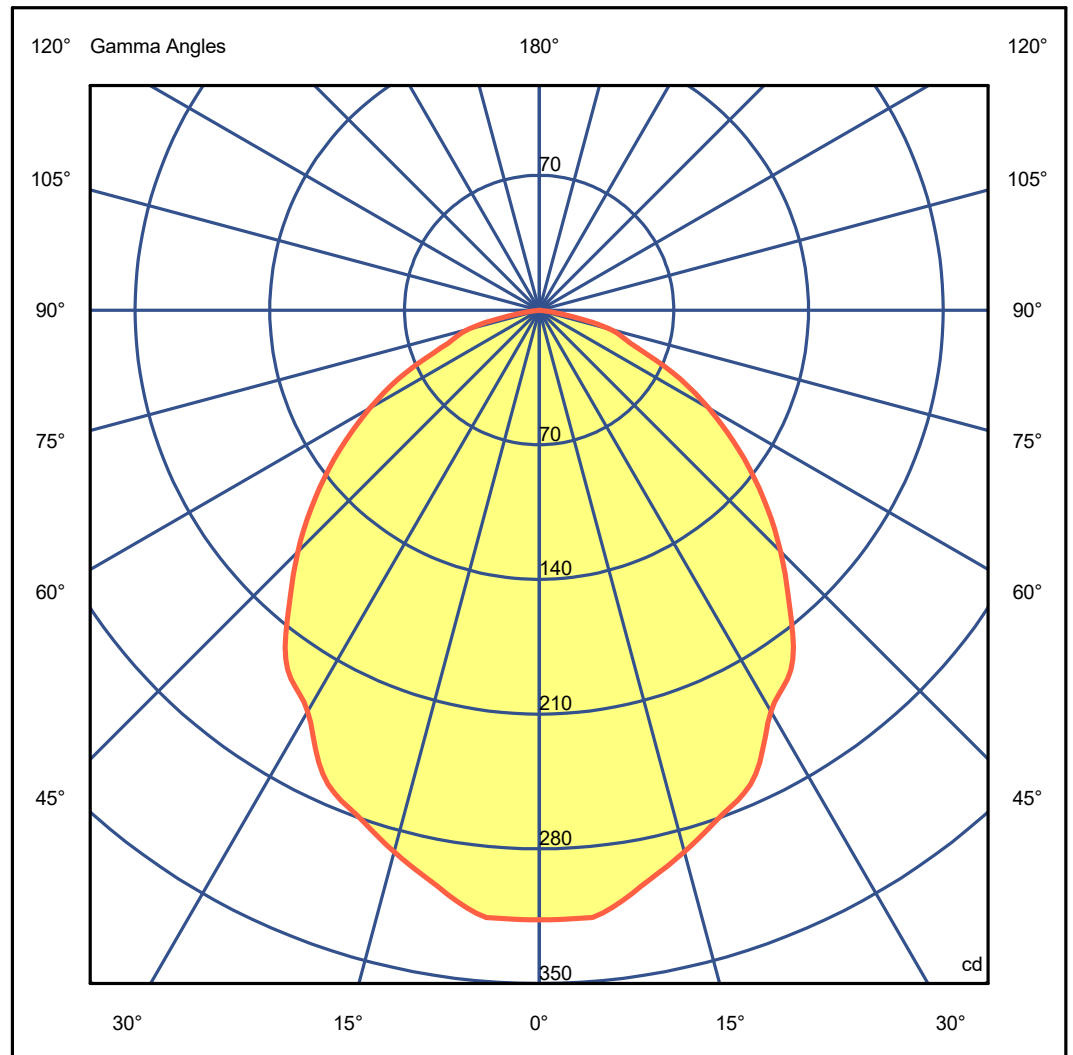

Luminaire

Code 5211-N
Name Dolt Difusa Dali 11W 740LM 4000K 120°

Measurem.

Code 78/2020
Name Dolt Difusa Dali 11W 740LM 4000K 120°

Luminaire Flux	740.05 lm	Luminaire Power	11.20 W	Efficacy	66.08 lm/W	Efficiency	100.00%
Sources Flux	740.05 lm	Maximum value	316.80 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
G 0.0		316.80
G 5.0		316.80
G 10.0		304.13
G 15.0		291.46
G 20.0		278.78
G 25.0		266.11
G 30.0		240.77
G 35.0		228.10
G 40.0		202.75
G 45.0		177.41
G 50.0		152.06
G 55.0		126.72
G 60.0		101.38
G 65.0		76.03
G 70.0		50.69
G 75.0		38.02
G 80.0		12.67
G 85.0		0.00
G 90.0		0.00