

Luminaire

Code 5211-S
Name Dolt Difusa Dali 11W 690LM 2700K 120°

Measurement


Code 77/2020
Name Dolt Difusa Dali 11W 690LM 2700K 120°

Luminaire Flux	690.22 lm	Luminaire Power	11.20 W	Efficacy	61.63 lm/W	Efficiency	100.00%
Sources Flux	690.22 lm	Maximum value	295.47 cd	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	37 mm	Width	564 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	564 mm	Height	0 mm
Horizontal Luminous Area		0.020868 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005048 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-03-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		690.22 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5211-S	LED 11W 690LM 2700K IRC>90 SDMC<3 AR<0.2	690.22	11.20	1
C.I.E.	53 84 98 100 100	D DIN 5040	A40		
F UTE	1.00 D	B NBN	BZ 4		

37mm x 564mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

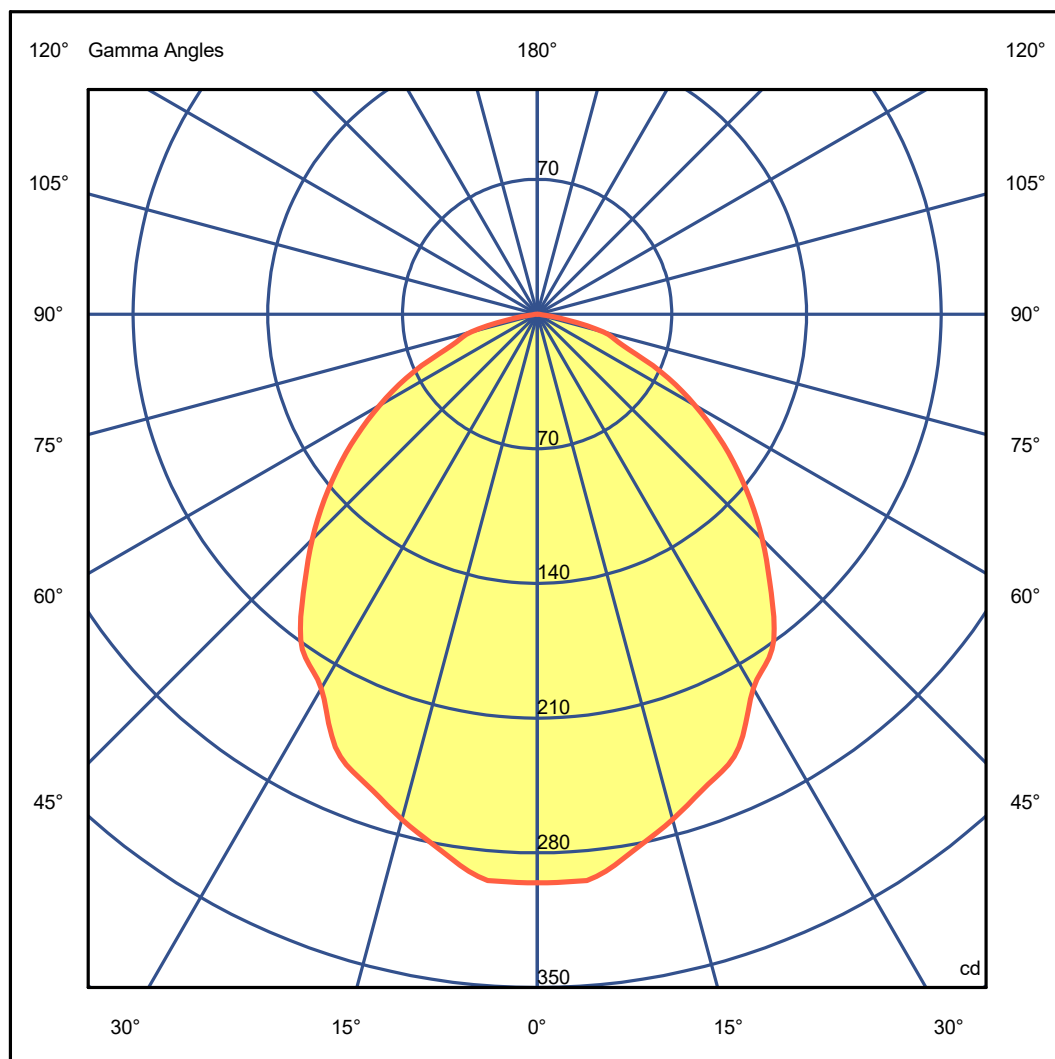

Luminaire

Code 5211-S
Name Dolt Difusa Dali 11W 690LM 2700K 120°

Measurem.

Code 77/2020
Name Dolt Difusa Dali 11W 690LM 2700K 120°

Luminaire Flux	690.22 lm	Luminaire Power	11.20 W	Efficacy	61.63 lm/W	Efficiency	100.00%
Sources Flux	690.22 lm	Maximum value	295.47 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
G 0.0		295.47
G 5.0		295.47
G 10.0		283.65
G 15.0		271.83
G 20.0		260.01
G 25.0		248.19
G 30.0		224.56
G 35.0		212.74
G 40.0		189.10
G 45.0		165.46
G 50.0		141.83
G 55.0		118.19
G 60.0		94.55
G 65.0		70.91
G 70.0		47.28
G 75.0		35.46
G 80.0		11.82
G 85.0		0.00
G 90.0		0.00