

Luminaire

Code 5212-S
Name Dolt Difusa Dali 11W 820LM 2700K 120°

Measurem.


Code 75/2020
Name Dolt Difusa Dali 11W 820LM 2700K 120°

Luminaire Flux	820.26 lm	Luminaire Power	11.20 W	Efficacy	73.24 lm/W	Efficiency	100.00%
Sources Flux	820.26 lm	Maximum value	342.14 cd	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	37 mm	Width	283 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	283 mm	Height	0 mm
Horizontal Luminous Area		0.010471 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002533 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-03-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		820.26 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line		Code	Name	Flux [lm]	Pow. [W]	Q.ty
		5212-S	LED 11W 820LM 2700K IRC>90 SDMC<3 AR<20%	820.26	11.20	1
C.I.E.	53 84 98 100 100		D DIN 5040	A40		
F UTE	1.00 D		B NBN	BZ 4		

37mm x 283mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

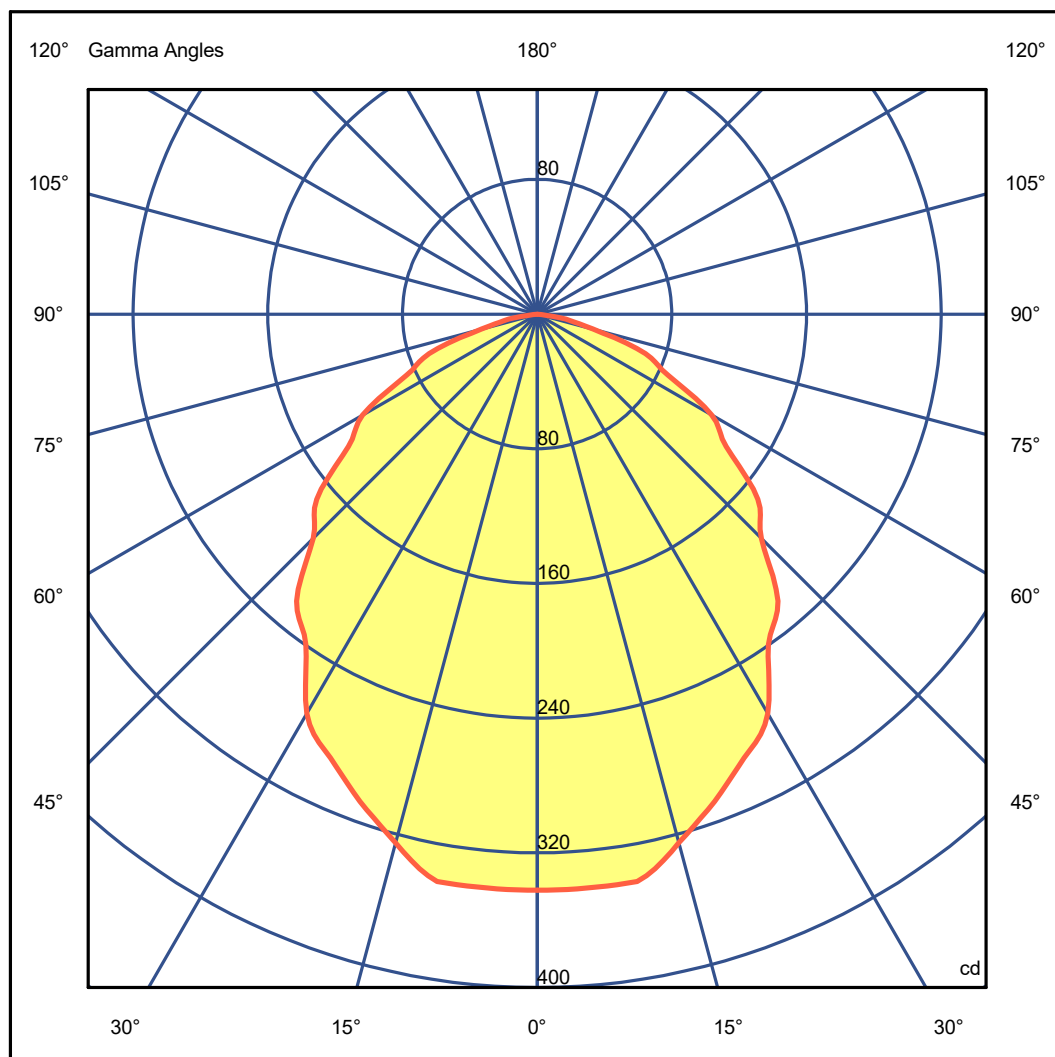

Luminaire

Code 5212-S
Name Dolt Difusa Dali 11W 820LM 2700K 120°

Measurem.

Code 75/2020
Name Dolt Difusa Dali 11W 820LM 2700K 120°

Luminaire Flux	820.26 lm	Luminaire Power	11.20 W	Efficacy	73.24 lm/W	Efficiency	100.00%
Sources Flux	820.26 lm	Maximum value	342.14 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
G 0.0		342.14
G 5.0		342.14
G 10.0		342.14
G 15.0		325.04
G 20.0		307.93
G 25.0		290.82
G 30.0		273.72
G 35.0		239.50
G 40.0		222.39
G 45.0		188.18
G 50.0		171.07
G 55.0		136.86
G 60.0		119.75
G 65.0		85.54
G 70.0		68.43
G 75.0		34.21
G 80.0		17.11
G 85.0		0.00
G 90.0		0.00