

Luminaire

Code 5213-N
Name Dolt Difusa Dali 22W 1840LM 4000K 120°

Measurem.


Code 80/2020
Name Dolt Difusa Dali 22W 1840LM 4000K 120°

Luminaire Flux	1840.03 lm	Luminaire Power	22.30 W	Efficacy	82.51 lm/W	Efficiency	100.00%
Sources Flux	1840.03 lm	Maximum value	787.68 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	564 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	564 mm	Height	0 mm	
Horizontal Luminous Area	0.020868 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.005048 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	03-06-2019	Maximum Gamma Angle	90				
Measurement Distance	0.00	Measurement Flux	1840.03 lm				
Operator		Rated Voltage					
Temperature	25.00 °C	Rated Current					
Humidity	60.00 %	Photocell					
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5213-N	LED 22W 1840LM 4000K IRC>90 SDMC<3 A40 BZ 4	1840.03	22.30	1
C.I.E.	53 84 98 100 100	D DIN 5040	A40		
F UTE	1.00 D	B NBN	BZ 4		

37mm x 564mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

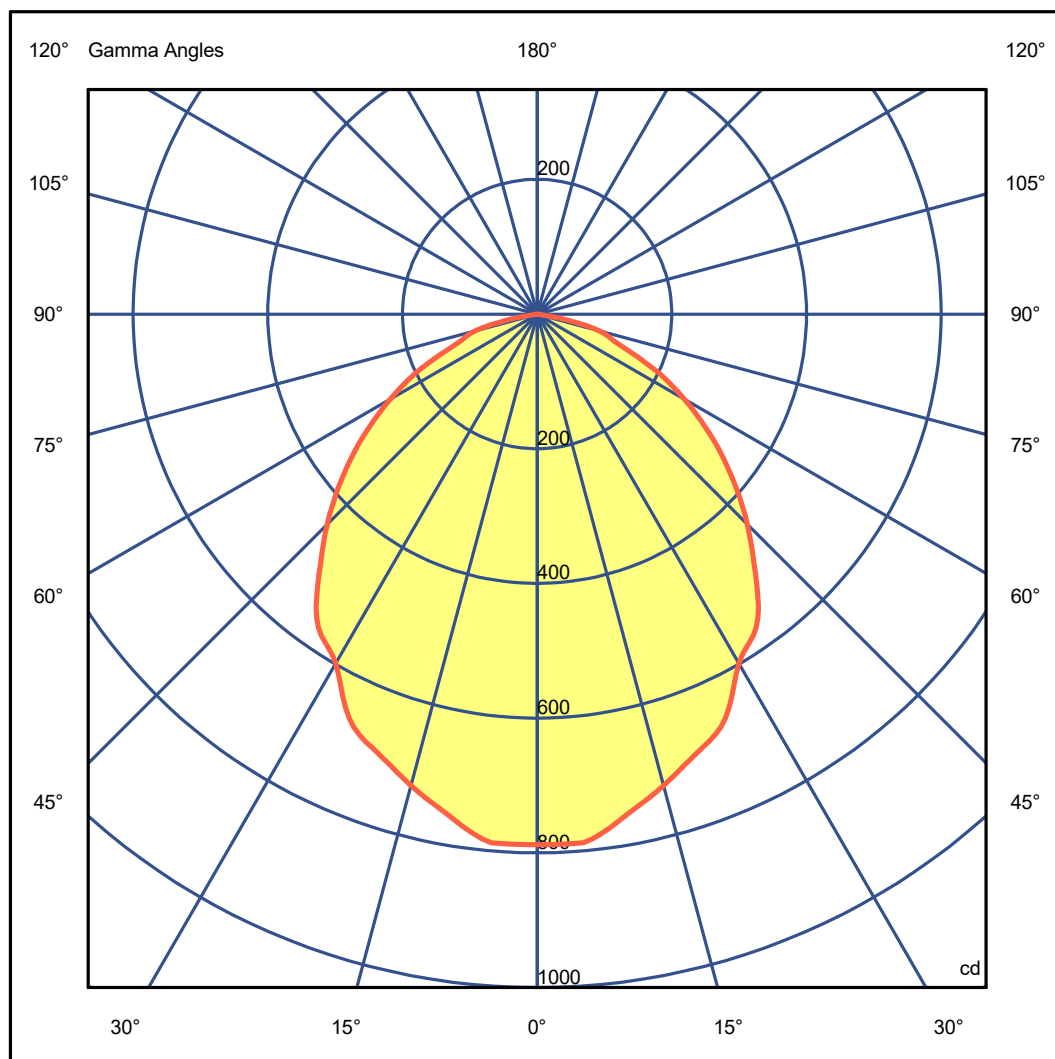

Luminaire

Code 5213-N
Name Dolt Difusa Dali 22W 1840LM 4000K 120°

Measurem.

Code 80/2020
Name Dolt Difusa Dali 22W 1840LM 4000K 120°

Luminaire Flux	1840.03 lm	Luminaire Power	22.30 W	Efficacy	82.51 lm/W	Efficiency	100.00%
Sources Flux	1840.03 lm	Maximum value	787.68 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
	G	0.0 787.68
	G	5.0 787.68
	G	10.0 756.17
	G	15.0 724.67
	G	20.0 693.16
	G	25.0 661.65
	G	30.0 598.64
	G	35.0 567.13
	G	40.0 504.12
	G	45.0 441.10
	G	50.0 378.09
	G	55.0 315.07
	G	60.0 252.06
	G	65.0 189.04
	G	70.0 126.03
	G	75.0 94.52
	G	80.0 31.51
	G	85.0 0.00
	G	90.0 0.00