

Luminaire

Code 5215-N
Name Dolt Difusa Dali 19W 1470LM 4000K 120°

Measurem.


Code 81/2020
Name Dolt Difusa Dali 19W 1470LM 4000K 120°

Luminaire Flux	1470.84 lm	Luminaire Power	19.00 W	Efficacy	77.41 lm/W	Efficiency	100.00%
Sources Flux	1470.84 lm	Maximum value	629.64 cd	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	37 mm	Width	1130 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	1130 mm	Height	0 mm
Horizontal Luminous Area		0.041810 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.010115 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-03-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1470.84 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5215-N	LED 19W 1470LM 4000K IRC>90 SDMC<3 F470R24	1470.84	19.00	1
C.I.E.	53 84 98 100 100	D DIN 5040	A40		
F UTE	1.00 D	B NBN	BZ 4		


37mm x 1130mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

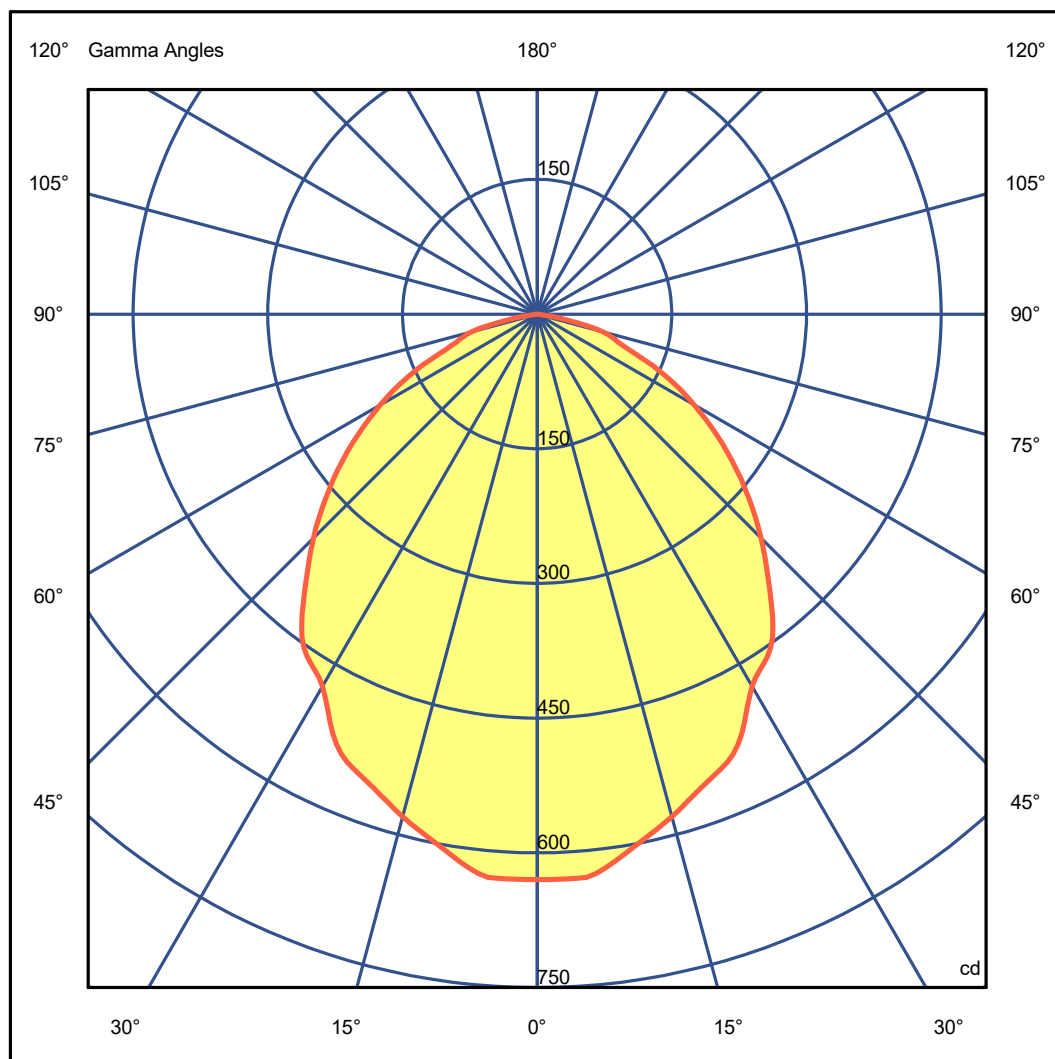

Luminaire

Code 5215-N
Name Dolt Difusa Dali 19W 1470LM 4000K 120°

Measurem.

Code 81/2020
Name Dolt Difusa Dali 19W 1470LM 4000K 120°

Luminaire Flux	1470.84 lm	Luminaire Power	19.00 W	Efficacy	77.41 lm/W	Efficiency	100.00%
Sources Flux	1470.84 lm	Maximum value	629.64 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
	G	0.0 629.64
	G	5.0 629.64
	G	10.0 604.45
	G	15.0 579.27
	G	20.0 554.08
	G	25.0 528.90
	G	30.0 478.53
	G	35.0 453.34
	G	40.0 402.97
	G	45.0 352.60
	G	50.0 302.23
	G	55.0 251.86
	G	60.0 201.48
	G	65.0 151.11
	G	70.0 100.74
	G	75.0 75.56
	G	80.0 25.19
	G	85.0 0.00
	G	90.0 0.00