

**Luminaire**

Code 5215-S  
Name Dolt Difusa Dali 19W 1370LM 2700K 120°


**Measurement**

Code 82/2020  
Name Dolt Difusa Dali 19W 1370LM 2700K 120°

Luminaire Flux	1370.77 lm	Luminaire Power	19.00 W	Efficacy	72.15 lm/W	Efficiency	100.00%
Sources Flux	1370.77 lm	Maximum value	586.80 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	1130 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	1130 mm	Height	0 mm	
Horizontal Luminous Area	0.041810 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.010115 m2
Coordinate system	CG	Symmetry Type	90	Maximum Gamma Angle	90	Measurement Flux	1370.77 lm
Date	06-03-2020	Measurement Distance	0.00	Operator		Temperature	25.00 °C
Humidity	60.00 %	Rated Voltage		Rated Current		Humidity	
Notes		Photocell					

**Luminaire Sources**

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5215-S	LED 19W 1370LM 2700K IRC>90 SDMC<3 FUTURE		19.00	1
C.I.E.	53 84 98 100 100	D DIN 5040	A40		
F UTE	1.00 D	B NBN	BZ 4		

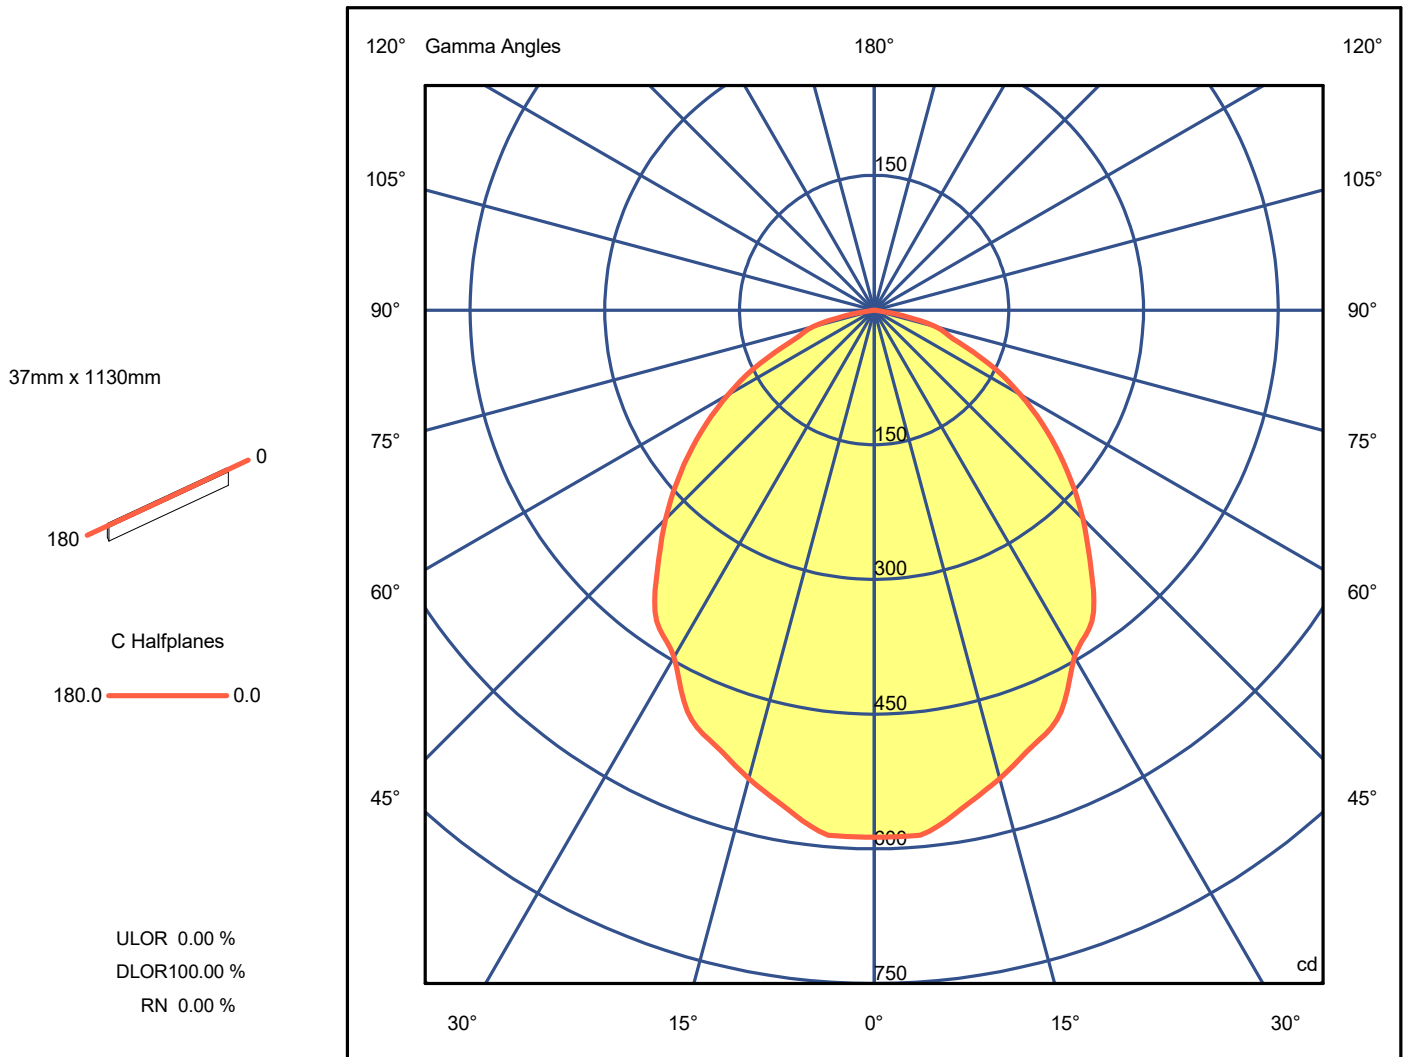

**Luminaire**

Code 5215-S  
 Name Dolt Difusa Dali 19W 1370LM 2700K 120°

**Measurem.**

Code 82/2020  
 Name Dolt Difusa Dali 19W 1370LM 2700K 120°

Luminaire Flux	1370.77 lm	Luminaire Power	19.00 W	Efficacy	72.15 lm/W	Efficiency	100.00%
Sources Flux	1370.77 lm	Maximum value	586.80 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

**Luminous Intensity Table cd Table 1/1**

C 0.00	
G 0.0	586.80
G 5.0	586.80
G 10.0	563.33
G 15.0	539.86
G 20.0	516.38
G 25.0	492.91
G 30.0	445.97
G 35.0	422.50
G 40.0	375.55
G 45.0	328.61
G 50.0	281.66
G 55.0	234.72
G 60.0	187.78
G 65.0	140.83
G 70.0	93.89
G 75.0	70.42
G 80.0	23.47
G 85.0	0.00
G 90.0	0.00