

Luminaire

Code 5200-AB-S
 Name Dolt Pontual Dali 3W 230LM 2700K 36°

Measurement


Code 99/2020
 Name Dolt Pontual Dali 3W 230LM 2700K 36°

Luminaire Flux	230.81 lm	Luminaire Power	3.20 W	Efficacy	72.13 lm/W	Efficiency	100.00%
Sources Flux	230.81 lm	Maximum value	736.80 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	37 mm	Width	130 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	130 mm	Height	0 mm
Horizontal Luminous Area		0.004810 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001164 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-04-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		230.81 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5200-AB-S	LED 3W 230LM 2700K IRC>90 SDMC<3 NICH	230.81	3.20	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		


37mm x 130mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

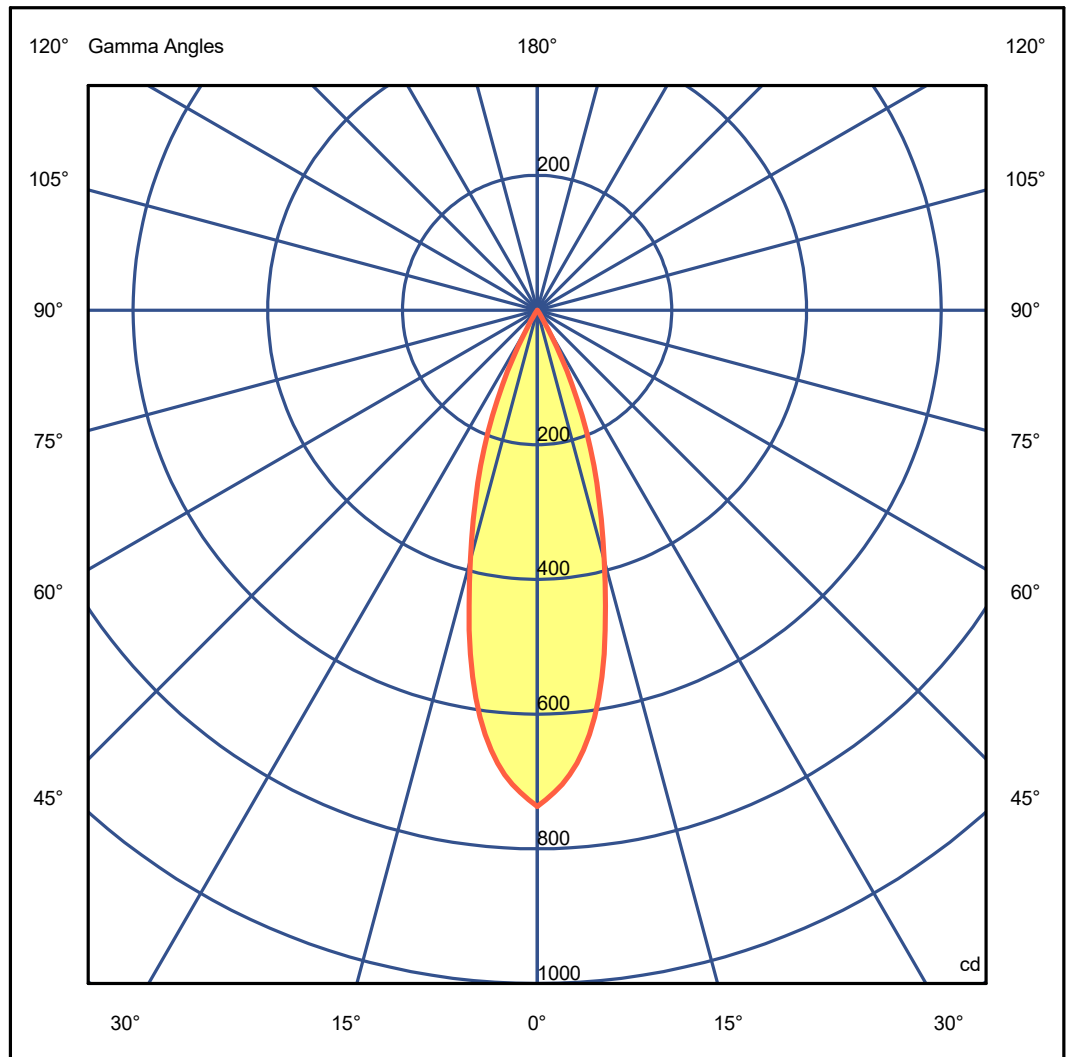

Luminaire

Code 5200-AB-S
 Name Dolt Pontual Dali 3W 230LM 2700K 36°

Measurem.

Code 99/2020
 Name Dolt Pontual Dali 3W 230LM 2700K 36°

Luminaire Flux	230.81 lm	Luminaire Power	3.20 W	Efficacy	72.13 lm/W	Efficiency	100.00%
Sources Flux	230.81 lm	Maximum value	736.80 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00

G 0.0	736.80
G 5.0	675.40
G 10.0	552.60
G 15.0	383.75
G 20.0	245.60
G 25.0	122.80
G 30.0	30.70
G 35.0	0.00
G 40.0	0.00
G 45.0	0.00
G 50.0	0.00
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00